

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Methods of measurement for DVD players

Méthodes de mesure pour les lecteurs DVD

ITU STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

IEC 62389:2005

<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2005 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Methods of measurement for DVD players

Méthodes de mesure pour les lecteurs DVD

STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

M

ICS 33.160.40

ISBN 978-2-8322-0730-7

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

INTERNATIONAL ELECTROTECHNICAL COMMISSION

METHODS OF MEASUREMENT FOR DVD PLAYERS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62389 has been prepared by TA7: Moderate data rate storage media, equipment and systems, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This bilingual version (2013-07) corresponds to the monolingual English version, published in 2005-10.

The text of this standard is based on the following documents:

CDV	Report on voting
100/903/CDV	100/983/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62389:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

METHODS OF MEASUREMENT FOR DVD PLAYERS

1 Scope

This International Standard specifies measurement methods of electrical characteristics for consumer-use DVD players. This standard is applicable for use in the description of performances for catalogues and brochures of the products.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61672-1, *Electroacoustics – Sound level meters – Part 1: Specifications*

IEC 61672-2, *Electroacoustics – Sound level meters – Part 2: Pattern evaluation tests*

IEC 61606-1, *Audio and audiovisual equipment – Digital audio parts – Basic measurement methods of audio characteristics – Part 1: General*

IEC 61606-2, *Audio and audiovisual equipment – Digital audio parts – Basic measurement methods of audio characteristics – Part 2: Consumer use*

ITU-R BT.471-1, *Nomenclature and description of colour bar signals*

SMPTE EG 1,1990, *Alignment colour bar test signal for television picture monitors*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61606-1 and IEC 61606-2, as well as the following, apply.

3.1

video signal

composite video signal including synchronization signal

3.2

S video signal

video signal separately transferred by Y signal and C signal

NOTE The Y signal is composed of the luminance signal and the synchronization signal from the composite video signal and does not include the chrominance signal. The C signal is the modulated chrominance signal.

3.3

component signal

set of three kinds of signals, Y signal and two chrominance signals

3.4

V or H synchronized sweep signal

video test signals that frequency is swept within a certain frequency range by vertical or horizontal synchronization timing.

3.5**525i**

expression of the video signal format which has 525 scanning lines in a frame and is interlaced

3.6**video signal level**

voltage value of the video signal measured from sync tip to white peak

3.7**EUT**

equipment under test

3.8**horizontal resolution**

visible limit of horizontal resolution calculated by the horizontal frequency characteristics of the luminance signal and expressed by the number of TV lines

3.9**video signal-to-noise ratio**

ratio of noise r.m.s. value to reference level of 100 %, 0,714 V r.m.s. in NTSC, 0,7 V r.m.s. in PAL, at the flat area of the luminance signal

3.10**video signal output level**

peak-to-peak value of the reference video output signal at reference load impedance

3.11**audio output signal level**

output voltage of playback reference signal

[IEC 62389:2005](http://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005)

<http://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

4 Measuring conditions**4.1 Conditions for both audio and video****4.1.1 Power supplies****4.1.1.1 Voltage**

The a.c. power voltage supplied shall be the fixed value of the region where the device under test (DUT) is used and the supplied d.c. power voltage shall be the fixed value specified by the manufacturer. The tolerance shall be within ± 1 % in both cases; the power-supply voltage can be within ± 5 % if this tolerance does not affect the results of measurement.

4.1.1.2 Frequency

The frequency of the a.c. power supply shall be 50 Hz or 60 Hz and the fluctuation shall be within ± 2 %.

4.1.1.3 Waveform distortion**4.1.1.3.1 AC power supply**

The waveform of the a.c. power supply shall be a sine wave of which the harmonic content is 2 % or less.

4.1.1.3.2 DC power supply

The ripple voltage shall be 0,1 % or less.

4.1.2 Environmental conditions

4.1.2.1 Environmental air condition

The environmental conditions for measurements shall be as follows.

Ambient temperature: from 15 °C to 35 °C

Relative humidity: 60 % ± 15 %

Air pressure: 96 kPa ± 10 kPa

4.1.2.2 Warm-up

The DUT shall have the power on 5 min before starting the test. This is negligible if the warm-up does not affect the results of the measurement.

4.2 Standard video settings

Video settings, such as picture sharpness control, shall be set at the position specified by the manufacturer, normally the centre position if there is no special indication, and the functions which affect the results of measurement, for example, the video enhancer, shall be switched off.

4.3 Standard audio settings

The test configuration for the audio measurement shall refer to the general configuration for the equipment under test (EUT) specified by IEC 61606-1.

5 Measuring instruments

5.1 Test disc <https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

The test disc specified in Annex A shall be used for measurements.

5.2 Video part

The measuring instruments specified by Table 1 shall be used. The test disc specified in Annex A shall be used for measurements.

Table 1 – Measuring instruments

No.	Measuring instrument	Specification
1	Oscilloscope	Frequency bandwidth: d.c. to over 60 MHz Vertical sensitivity: below 10 mV/div Vertical scale accuracy: within ±5 % Input impedance: over 1 MΩ
2	Video noise meter	Frequency bandwidth: 100 kHz to over 6 MHz Frequency band width settings HPF: 100 kHz LPF: 6 MHz SC (subcarrier) trap: ON/OFF Weight: ON/OFF Indication: 0 dB = 0,714 V r.m.s. (NTSC) / 0,700 V r.m.s. (PAL) with RMS voltmeter
3	Display monitor	The internal 75 Ω terminator shall be OFF
4	Terminator	75 Ω ± 1 %

5.3 Audio part

5.3.1 Weighing filter

The weighing filter used shall have A-weighting characteristics with tolerances class 1 as specified for sound level measurements in IEC 61672-1.

5.3.2 Other instruments

Other instruments, such as analogue in-band level meter or low-pass filter or analogue distortion meter, are defined in IEC 61601-1.

6 Methods of measurement

6.1 Video part

6.1.1 Horizontal resolution

6.1.1.1 Block diagram

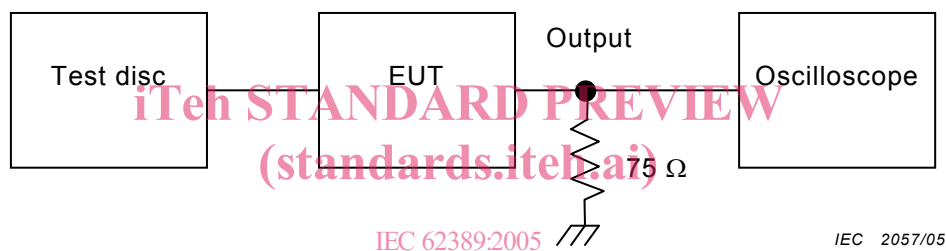


Figure 1 – Block diagram for horizontal resolution measurement

6.1.1.2 Test signal

The V or H synchronized sweep signal, amplitude of 100 % and frequency range of 100 kHz to 6,75 MHz with frequency markers.

6.1.1.3 Measurement

- Set the EUT to the standard settings for the video part described in 4.2.
- Play back the V or H sweep signal of the test disc and read the frequency at which the signal level becomes 1/10 (-20 dB) of the level of 1 MHz by oscilloscope with one decimal unit of MHz. Calculate the horizontal resolution, R_h , by the following formula.

$$R_h = (3/4) \times 2 \times (1 - \alpha) \times (f_o \times 10^6 / f_H) \approx 80 \times f_o \text{ (TV lines)}$$

where

f_H is the horizontal line frequency (in Hz);

α is the blanking duration rate of the horizontal line (0,17);


f_o is the frequency which signal level is becoming to 1/10 (-20 dB) of the level of 1 MHz (in MHz).

NOTE 1 In the case where the level of 6,75 MHz, the end-point of the sweep signal, is greater than 1/10 (-20 dB) of the level of 1 MHz, the horizontal resolution is reported to 540 TV lines.

NOTE 2 In the case where the envelope of the sweep signal appears double, the lower level should be read as the measuring value. In the case where the envelope has a ripple, the dip-point level is read as the measuring value.

6.1.2 Video signal-to-noise ratio

6.1.2.1 Block diagram

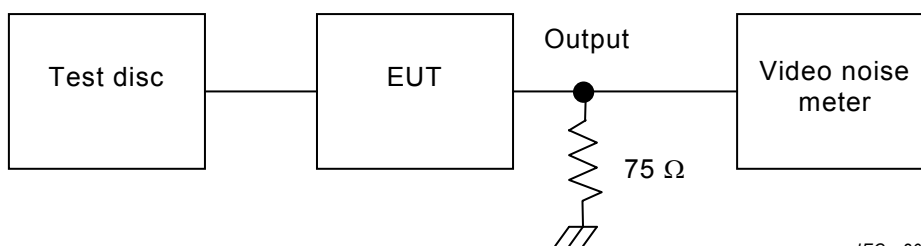

IEC 2058/05

Figure 2 – Block diagram for video signal-to-noise ratio

6.1.2.2 Test signal

50 % white signal.

6.1.2.3 Measurement

- Set the EUT to the standard settings for the video part described in 4.2.
- Play back the 50 % white signal of the test disc.
- Set the video noise meter as follows.
- Adjust the input level of the video noise meter to 0,357 V in NTSC, 0,35 V in PAL.
- Read the value of the noise meter.

ITeC STANDARD PREVIEW
(standards.iteh.ai)


Table 2 – Settings of the video noise meter

<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>

Setting items	Video output	S video terminal, component, D-connector
HPF	100 kHz	100 kHz
LPF	6 MHz	6 MHz
SC Trap	On	Off
Weight	Off	Off

6.1.3 Video signal output level

6.1.3.1 Block diagram

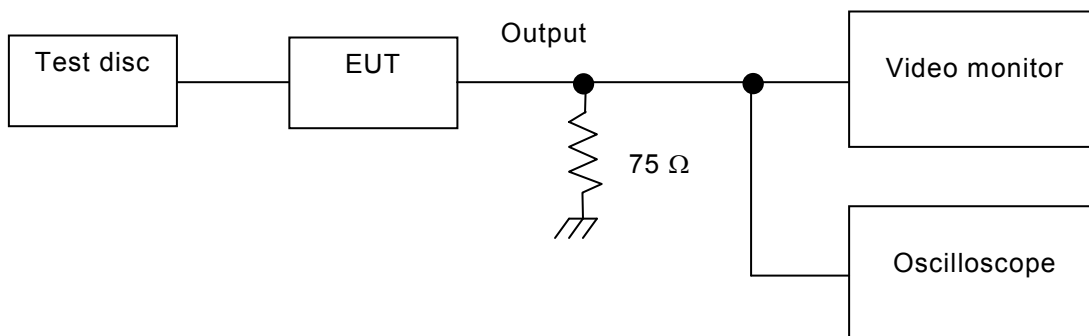

NOTE 1 The terminator of the video monitor is off.

NOTE 2 The video monitor can be omitted if there is no doubt.

IEC 2059/05

Figure 3 – Block diagram for video signal output level measurement

6.1.3.2 Test signal

NTSC SMPTE colour bar signal or 100 % full colour bar signal (ITU-R BT.471(100/0/100/0) colour bar).

6.1.3.3 Measurement

- a) Set the EUT to the standard settings for the video part described in 4.2.
- b) Play back the colour bar signal of the test disc and measure the peak-to-peak value of the video output signal by oscilloscope.

NOTE 1 In the case of the C signal of the S video output, the burst signal level is measured.

NOTE 2 The value between the centre of bright points of the waveform is measured.

NOTE 3 In the case where the signal waveform has ripples, the flattest portion is measured. In the case where the synchronization pulse signal is slanted, the lower level is used as the sync level.

6.2 Audio part

6.2.1 General

The following characteristics are defined. The methods of basic measurement are specified by IEC 61606; others are specified by this standard.

6.2.2 Audio-frequency characteristics

6.2.2.1 Methods of measurement

Apply IEC 61606-2, 5.2.1.

6.2.2.2 Test signal

Apply IEC 61606-1, Table 1, for the frequencies 48 kHz, 96 kHz and 192 kHz.

6.2.3 Audio distortion and noise

Apply IEC 61606-2, 5.4.2.

6.2.4 Audio dynamic range

Apply IEC 61606-2, 5.3.2.

6.2.5 Audio signal-to-noise ratio

Apply IEC 61606-2, 5.3.1.

6.2.6 Audio output signal level

6.2.6.1 Block diagram



IEC 2060/05

Figure 4 – Block diagram for audio output level measurement

6.2.6.2 Test signal

The frequency is 1 kHz; the signal level is full-scale.

6.2.6.3 Measurement

- a) Set the EUT to the standard settings for the audio part described in 4.3.
- b) Play back the reference full-scale signal of the test disc.
- c) Set the analogue in-band level meter.
- d) Read the value of the analogue in-band level meter.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62389:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/51723ce9-d385-49ff-9b79-47b22f56a3a7/iec-62389-2005>