

INTERNATIONAL STANDARD

**Maritime navigation and radiocommunication equipment and systems –
Shipborne radar – Performance requirements, methods of testing and required
test results**

(<https://standards.iteh.ai>)

Document Preview

IEC 62388:2007

<https://standards.iteh.ai/doc/standards/iec/bb1a3e9e-5f5c-474f-8b57-b742d2e6e48b/iec-62388-2007>

WITHDRAWN





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.


- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

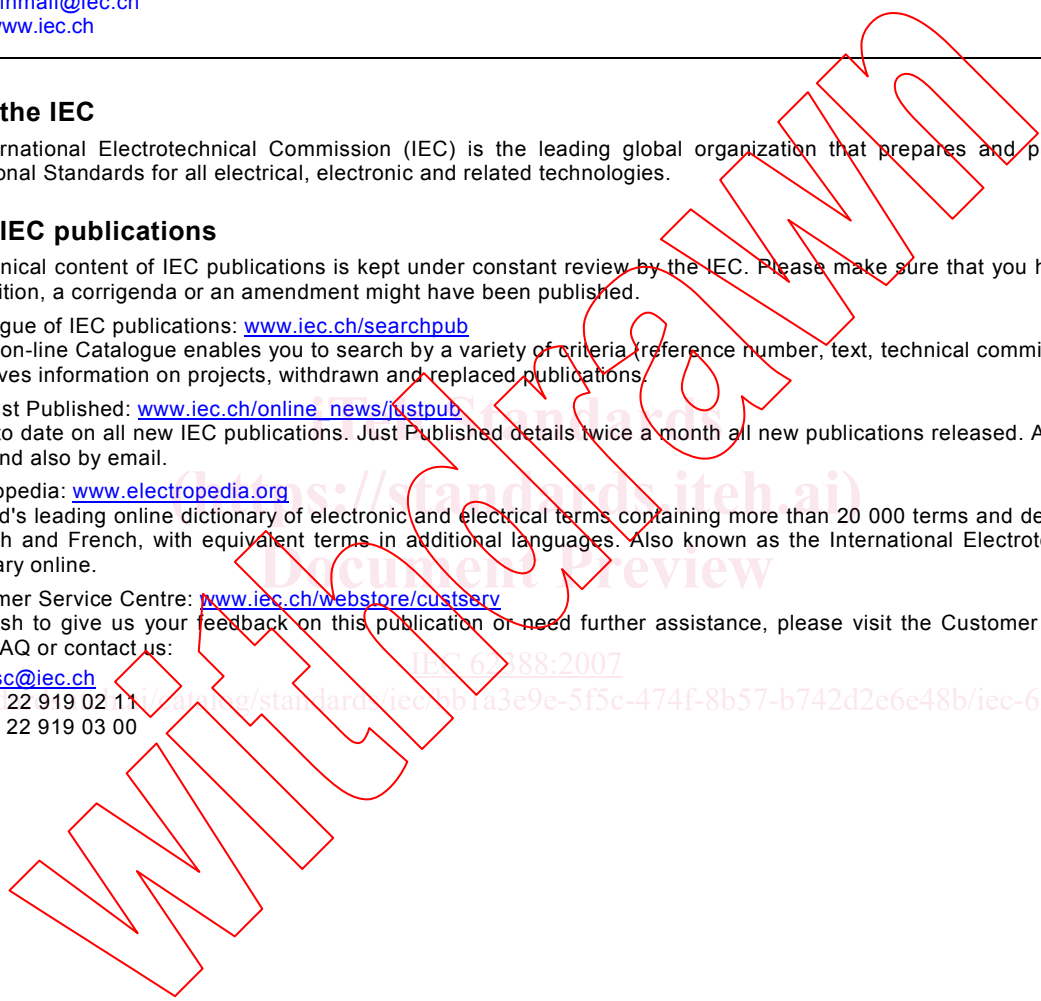

IEC 62388:2007

<https://standards.iec.ch/standards/iec/62388-2007>

INTERNATIONAL STANDARD

**Maritime navigation and radiocommunication equipment and systems –
Shipborne radar – Performance requirements, methods of testing and required
test results**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XH**

CONTENTS

FOREWORD.....	11
1 Scope.....	13
1.1 Purpose	13
1.2 Application of these standards.....	14
1.3 Equipment categories.....	14
2 Normative references	15
3 Terms and definitions	16
4 General	25
4.1 Establishing equipment type and status.....	25
4.2 Conditions of measurement and related definitions.....	26
4.3 Test sites and simulation	26
4.3.1 Environmental and RF testing.....	26
4.3.2 Over-sea radar performance tests	26
4.3.3 Test targets and target simulation for performance tests.....	27
4.4 Quality requirements	27
4.5 Test terminology and format.....	27
4.5.1 General	27
4.5.2 Test requirement terminology	27
4.5.3 Testing method terminology.....	28
5 Radar performance.....	28
5.1 General.....	28
5.2 Transmission and interference.....	28
5.2.1 Transmission frequency.....	28
5.2.2 Interference.....	29
5.3 Performance optimisation and monitoring.....	29
5.3.1 General	29
5.3.2 Optimum performance	29
5.4 Gain and anti-clutter functions.....	30
5.4.1 General.....	30
5.4.2 Gain function	30
5.4.3 Manual and automatic sea anti-clutter	31
5.4.4 Rain anti-clutter	31
5.5 Signal processing.....	31
5.5.1 General	31
5.5.2 Target enhancement.....	31
5.5.3 Radar signal correlation.....	32
5.5.4 Signal processing and radar image latency.....	32
5.5.5 Second-time-around echoes	33
5.5.6 Transmission format	33
5.5.7 Picture update	33
5.5.8 Additional processing	33
5.5.9 Signal processing description	34
5.6 Operation with SARTs, target enhancers (RTEs) and beacons	34
5.6.1 General	34
5.6.2 Radar beacons, SARTs and enhancers	34

5.7	Minimum range and range compensation	35
5.7.1	General	35
5.7.2	Range compensation	35
5.7.3	Minimum range	35
5.8	Range and bearing discrimination	36
5.8.1	General	36
5.8.2	Measurement conditions	36
5.8.3	Range discrimination	36
5.8.4	Bearing discrimination	37
5.8.5	Fundamental radar accuracy	37
5.9	Target detection performance assessment	37
5.9.1	General	37
5.9.2	Range of first detection in minimal clutter	38
5.9.3	Assessment of target detection with clutter	40
5.9.4	Radar performance documentation	46
5.10	Radar antenna (including pitch and roll)	47
5.10.1	General	47
5.10.2	Vertical radiation pattern/pitch and roll	47
5.10.3	Antenna horizontal pattern	47
5.10.4	Antenna side lobes	48
5.11	Radar availability	49
5.11.1	Standby and transmit	49
6	Display presentation	49
6.1	General	49
6.2	Performance standards	49
6.3	Presentation of information	50
6.3.1	Consistency of layout	50
6.3.2	Consistency of presentation	50
6.3.3	Separation of operational display area	51
6.3.4	Operational display area information	51
6.4	Readability	51
6.4.1	Readability under all ambient light conditions	51
6.4.2	Legibility of alphanumeric data, information and text	53
6.4.3	Presentation of text	54
6.4.4	Icons	54
6.5	Colours and intensity	54
6.5.1	Use and discrimination of colour	54
6.6	Symbols	56
6.6.1	Operational information	56
6.7	Coding of information	56
6.7.1	Colour coding of alarm-related information	56
6.7.2	Colour coding in combination with other attributes	56
6.7.3	Flashing of information	57
6.8	Integrity marking	57
6.8.1	Indication of source, validity and integrity status	57
6.8.2	Colour coding of validity and integrity	57
6.9	Alarms and indications	58
6.9.1	Operational status	58
6.9.2	List of alarms	58

6.9.3	Alarm related information from multiple sources	59
6.10	Presentation of radar information	59
6.10.1	Radar video images.....	59
6.10.2	Linearity and index delay.....	60
6.11	Physical requirements	61
6.11.1	Operational display area.....	61
6.11.2	Contrast and brightness adjustment.....	61
6.11.3	Temporal stability	62
6.11.4	Physical controls and status indicators	62
6.12	Colours	63
6.12.1	Requirement.....	63
6.12.2	Method of test and required results	63
6.13	Screen resolution	63
6.13.1	Requirement.....	63
6.13.2	Methods of test and required results.....	63
6.14	Screen viewing angle	64
6.14.1	Requirement.....	64
6.14.2	Methods of test and required results.....	64
6.15	Magnetic interference.....	64
6.15.1	Requirement.....	64
6.15.2	Methods of test and required results.....	64
7	CCRP and own ship	64
7.1	Consistent common reference point (CCRP)	64
7.1.1	CCRP position.....	64
7.1.2	Measurements.....	65
7.1.3	Antenna offset.....	65
7.2	Own ship.....	66
7.2.1	General.....	66
7.2.2	Own ship's outline and minimised symbol.....	66
7.2.3	Heading line.....	66
7.2.4	Stern line.....	67
8	Navigation tools.....	67
8.1	General.....	67
8.1.1	Units of measurement.....	67
8.1.2	Presentation.....	68
8.2	Display range scales	68
8.2.1	Mandatory range scales	68
8.3	Variable range marker (VRM).....	69
8.3.1	General	69
8.3.2	VRM measurements	69
8.4	Electronic bearing line (EBL).....	70
8.4.1	General	70
8.4.2	EBL measurements	70
8.4.3	EBL origin position	70
8.5	Cursor.....	71
8.5.1	General	71
8.5.2	Cursor measurement.....	71
8.5.3	Selection by cursor.....	72
8.6	Offset measurement of range and bearing.....	72

8.6.1	General	72
8.6.2	Electronic range/bearing line (ERBL)	72
8.7	Parallel index lines (PI)	73
8.7.1	General	73
8.7.2	PI lines and positioning	73
8.8	Bearing scale	73
8.8.1	General	73
8.8.2	Bearing scale presentation	74
8.9	Range rings	74
8.9.1	General	74
8.9.2	Range ring presentation and measurement	74
8.10	Radar maps	75
8.10.1	General	75
8.10.2	Map functions and display simple user-defined maps	75
8.10.3	Map memory and transfer	76
8.10.4	Map presentation properties	76
8.11	Navigation routes	76
8.11.1	General	76
8.11.2	Route display and monitoring	76
9	Orientation, motion and stabilisation	77
9.1	General	77
9.2	Azimuth stabilisation	77
9.2.1	Accuracy of alignment	77
9.2.2	Heading readout and reference	78
9.2.3	Azimuth stabilisation update	79
9.3	Motion and orientation modes	79
9.3.1	General	79
9.3.2	True and relative motion	79
9.4	Off-centring	79
9.4.1	General	79
9.4.2	Manual and automatic off-centring	79
9.4.3	Automatic reset	80
9.4.4	Display orientation	80
9.5	Ground and sea stabilisation	81
9.5.1	Mode and source	81
9.5.2	Ground stabilisation	81
9.5.3	Sea stabilisation	82
10	Aids for collision avoidance	82
10.1	General	82
10.2	Target trails and past positions	83
10.2.1	General	83
10.2.2	Time and plot requirements	83
10.2.3	Trails/past position availability	84
10.3	Target tracking (TT)	84
10.3.1	General	84
10.3.2	Presentation of targets	85
10.3.3	Tracking calculations	85
10.3.4	Target tracking availability	86
10.3.5	Classification and tracked target capacity	86

10.3.6	Manual acquisition	87
10.3.7	Automatic acquisition	87
10.3.8	Motion trend	88
10.3.9	Visibility of 50 %	88
10.3.10	Tracking algorithm	88
10.3.11	Target swap	88
10.3.12	Cease tracking	89
10.3.13	Target tracking scenarios	89
10.3.14	Target motion and tracking accuracy	89
10.3.15	Tracker range and bearing accuracy	97
10.3.16	Reference target	98
10.4	Tracking limitations	99
10.4.1	Tracking warnings	99
10.4.2	Documentation	99
10.5	Automatic identification system	99
10.5.1	General	99
10.5.2	AIS target capacity	100
10.5.3	Filtering of AIS sleeping targets	101
10.5.4	Activation and deactivation of AIS targets	101
10.5.5	AIS functionality and presentation	102
10.6	Radar and AIS target data	104
10.6.1	General	104
10.6.2	Bow crossing range and time (BCR/BCT)	105
10.7	Operational target alarms	105
10.7.1	General	105
10.7.2	CPA and TCPA	105
10.7.3	New target alarm	106
10.7.4	Lost tracked radar target	106
10.7.5	Lost AIS target criteria	107
10.8	Target association	108
10.8.1	General	108
10.8.2	Association and priority	108
10.9	Trial manoeuvre	112
10.9.1	General	112
10.9.2	Trial functions	112
11	Chart radar (optional classification)	113
11.1	General	113
11.1.1	Chart operation and source	114
11.1.2	Chart elements and availability	114
11.1.3	Chart reference	115
11.1.4	Primary chart information set	115
11.1.5	Chart stabilisation and chart redraw	116
11.1.6	Chart position and latency	117
11.1.7	Matching and adjustment	117
11.1.8	Chart symbols, colours, and size	118
11.1.9	Chart display size	119
11.1.10	Chart alarms and indications	119
11.1.11	Chart malfunction	119
11.1.12	Chart radar malfunction	120

11.2	Additional requirements for standalone radar with chart facilities	120
11.2.1	General	120
11.2.2	Provision and updating of chart information	120
11.2.3	Content and structure of chart data	120
12	Ergonomic criteria (control functions and display)	121
12.1	General	121
12.1.1	Operational controls	121
12.1.2	Primary controls	122
12.1.3	Control properties	122
13	Interfacing	123
13.1	General	123
13.2	Input interfacing	123
13.2.1	Input data	123
13.2.2	Input quality, integrity and latency	123
13.3	Output interfacing	124
13.3.1	Output format	124
13.3.2	Output target data	124
13.3.3	VDR interface	125
14	Design, servicing and installation	125
14.1	General	125
14.1.1	Fault diagnosis and servicing	125
14.1.2	Display design	126
14.2	Transceiver design	126
14.2.1	General	126
14.2.2	Sector blanking	127
14.3	Antenna design	127
14.3.1	Requirement	127
14.3.2	Methods of test and required results	127
14.4	Inter-switched and multiple radars	128
14.4.1	General	128
14.4.2	System safeguards	128
14.4.3	Combining radar	128
14.4.4	Multiple radar system status	129
14.5	Multiple operational displays	129
14.5.1	Additional information and conformity	129
14.6	Safety – antenna and radiation	130
14.6.1	General	130
14.6.2	Antenna radiation and rotation	130
14.6.3	Microwave radiation levels	130
15	Alarms and failures	131
15.1	General	131
15.1.1	Alarms and indications	131
15.1.2	Alarm outputs	131
15.1.3	Picture freeze	132
15.1.4	Sensor failure alarm	132
15.2	Backup and fallback arrangements	132
15.2.2	Failure of heading information (azimuth stabilisation)	132
15.2.3	Failure of speed through the water information	133

15.2.4	Failure of course and speed over ground information.....	133
15.2.5	Failure of position input information.....	133
15.2.6	Failure of radar video input information.....	133
15.2.7	Failure of AIS input information.....	134
15.2.8	Failure of an integrated or networked system.....	134
16	Environmental testing.....	134
16.1	General.....	134
16.1.1	Testing to IEC 60945.....	134
16.2	Additional environmental tests.....	135
16.2.1	General.....	135
16.2.2	Antenna shock test.....	135
17	Equipment familiarisation and documentation.....	136
17.1	General.....	136
17.1.1	User requirements.....	136
17.2	Instructions and documentation.....	136
17.2.1	General.....	136
17.2.2	Documentation.....	137
17.2.3	Operating instructions.....	137
17.3	Radar system installation.....	138
Annex A (informative)	Guidelines for radar functionality on navigation displays.....	139
Annex B (normative)	Unwanted emissions of radar systems.....	140
Annex C (informative)	Radar target size (RCS) and detection range calculations.....	145
Annex D (informative)	Factors that influence target detection.....	149
Annex E (normative)	Sensor errors.....	158
Annex F (informative)	Target scenario simulator/reported target simulator.....	160
Annex G (informative)	Tracked and reported target states.....	161
Annex H (normative)	IEC 61162 sentence formats.....	162
Annex I (normative)	Radar control function/indication grouping.....	172
Annex J (normative)	Presentation colours and symbols.....	176
Annex K (normative)	Colour calibration for chart radar.....	200
Figure 1	– Reduction of range to first detection due to rain at S-band.....	41
Figure 2	– Reduction of range to first detection due to rain at X-band.....	42
Figure 3	– TT scenario 1.....	91
Figure 4	– TT scenario 2.....	93
Figure 5	– TT scenario 3.....	94
Figure 6	– TT scenario 4.....	95
Figure 7	– TT scenario 5.....	96
Figure B.1	– B ₄₀ falls within the allocated band.....	143
Figure B.2	– B ₄₀ falls outside the allocated band.....	144
Figure C.1	– Enhancement by reflection (dB) over free-space (9,41 GHz).....	148
Figure C.2	– Enhancement by reflection (dB) over free-space (3,05 GHz).....	148
Figure D.1	– Effect of sea spikes on target detection.....	151
Figure D.2	– Multi-path plots for S-band.....	153

Figure D.3 – Multi-path plot for X-band	153
Figure G.1 – Tracked target states.....	161
Figure G.2 – AIS target states.....	161
Table 1 – Performance requirements for categories of ship/craft for SOLAS V	15
Table 2 – Range of first detection in clutter-free conditions.....	39
Table 3 – X-band pass/fail assessment criteria	45
Table 4 – S-band pass/fail assessment criteria	45
Table 5 – Pass/fail assessment.....	45
Table 6 – Douglas sea state parameters.....	46
Table 7 – Main horizontal beam pattern	48
Table 8 – Effective side-lobes.....	48
Table 9 – Ambient light conditions	52
Table 10 – Operational alarm status	58
Table 11 – Tracked target capacity (subset of Table 1).....	86
Table 12 – Typical tracked target accuracy (95 % probability figures).....	90
Table 13 – TT scenario 1, with sensor errors applied.....	90
Table 14 – TT scenario 1, times of measurement task.....	91
Table 15 – TT scenario 1, accuracies after 1 min and 3 min (all ± values).....	92
Table 16 – TT scenario 2, own ship turning through ± 180°.....	92
Table 17 – TT scenario 3, initial target data.....	93
Table 18 – TT scenario 4, initial target data for fast targets (standard speed ships).....	94
Table 19 – TT scenario 4, initial target data for fast targets (HSC).....	94
Table 20 – TT scenario 5: initial target data for standard craft.....	95
Table 21 – TT scenario 5: initial target data for collision scenario for HSC.....	96
Table 22 – Measurement points and results at 3 min and 6 min for HSC.....	96
Table 23 – Measurement points and results at 11 min and 14 min for HSC.....	97
Table 24 – Measurement points and results at 3 min and 6 min for standard craft.....	97
Table 25 – Measurement points and results at 11 min and 14 min for standard craft.....	97
Table 26 – Measurement of tracked target accuracy.....	98
Table 27 – AIS target display capacity (subset of Table 1).....	100
Table 28 – AIS reporting rates.....	107
Table 29 – Association scenario 1, initial TT and AIS target position and data.....	109
Table 30 – Association scenario 1, AIS target data for diverging and converging tracks.....	110
Table 31 – Association scenario 2, initial TT and AIS target position and data.....	110
Table 32 – Association scenario 2, AIS target data for changing speed.....	111
Table 33 – Association scenario 3, TT and AIS target start position and data.....	111
Table 34 – Association scenario 4, initial TT and AIS target position and data.....	112
Table 35 – Association scenario 4, TT and AIS target with the same course and speed.....	112
Table 36 – Antenna shock test severity (half sine pulse).....	135
Table B.1 – Measurement frequency ranges.....	141
Table D.1 – Spread of RCS values for typical ships.....	150
Table D.2 – S-band performance predictions ($P_{fa} = 10^{-4}$) for ranges of 0,2, 0,4, 0,7 NM....	152

Table D.3 – X-band performance predictions ($P_{fa} = 10^{-4}$) for ranges of 0,2, 0,7 NM 152

Table D.4 – Parameters for attenuation in uniform rain conditions..... 154

Table D.5 – Typical values for attenuation and backscatter in uniform rain conditions..... 154

Table D.6 – Additional radar system parameters (X/S-band)..... 154

Table D.7 – Target size, height and RCS values 155

Table D.8 – S-band radar parameters (LP) 156

Table D.9 – X-band radar parameters (LP) 157

Table H.1 – Mandatory IEC 61162-1 sentences 162

Table H.2 – Tracked target data structure 164

Table H.3 – Description of terms..... 165

Table H.4 – Header format..... 166

Table H.5 – Package data format..... 168

Table I.1 – Top-level grouping of data and control functions for radar applications..... 172

Table I.2 – Icons for common function controls 173

Table J.1 – Features and colours to be used for radar maps..... 178

Table J.2 – Own ship symbols 178

Table J.3 – Radar and AIS symbols 183

Table J.4 – Navigation symbols 193

Table J.5 – Navigation tools..... 198

Table J.6 – Other symbols 199



ITeC Standards
(<https://standards.iteh.ai/>)
Document Preview

IEC 62388:2007

<https://standards.iteh.ai/en/standards/iec/bb1a3e9e-5f5c-474f-8b57-b742d2e6e48b/iec-62388-2007>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MARITIME NAVIGATION AND RADIOCOMMUNICATION
EQUIPMENT AND SYSTEMS –****Shipborne radar –
Performance requirements, methods of testing
and required test results**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62388 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

This standard replaces all the IEC 60936 (radar) and IEC 60872 (plotting) series of standards. Contents from the previous radar series (IEC 60936-1, IEC 60936-2, IEC 60936-3 and IEC/PAS 60936-5) and plotting series (IEC 60872-1, IEC 60872-2 and IEC 60872-3) of standards have been included as appropriate in this standard.

This standard supports the new IMO performance standards for shipborne radar, Resolution MSC.192(79) adopted by the IMO in December 2004. Resolution MSC.192(79) supersedes all previous IMO resolutions relating to radar and plotting, including IMO Resolutions A.278(VIII), A.477(XII) and MSC 64(67) Annex 4.

The text of this standard is based on the following documents:

FDIS	Report on voting
80/494/FDIS	80/504/RVD


Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

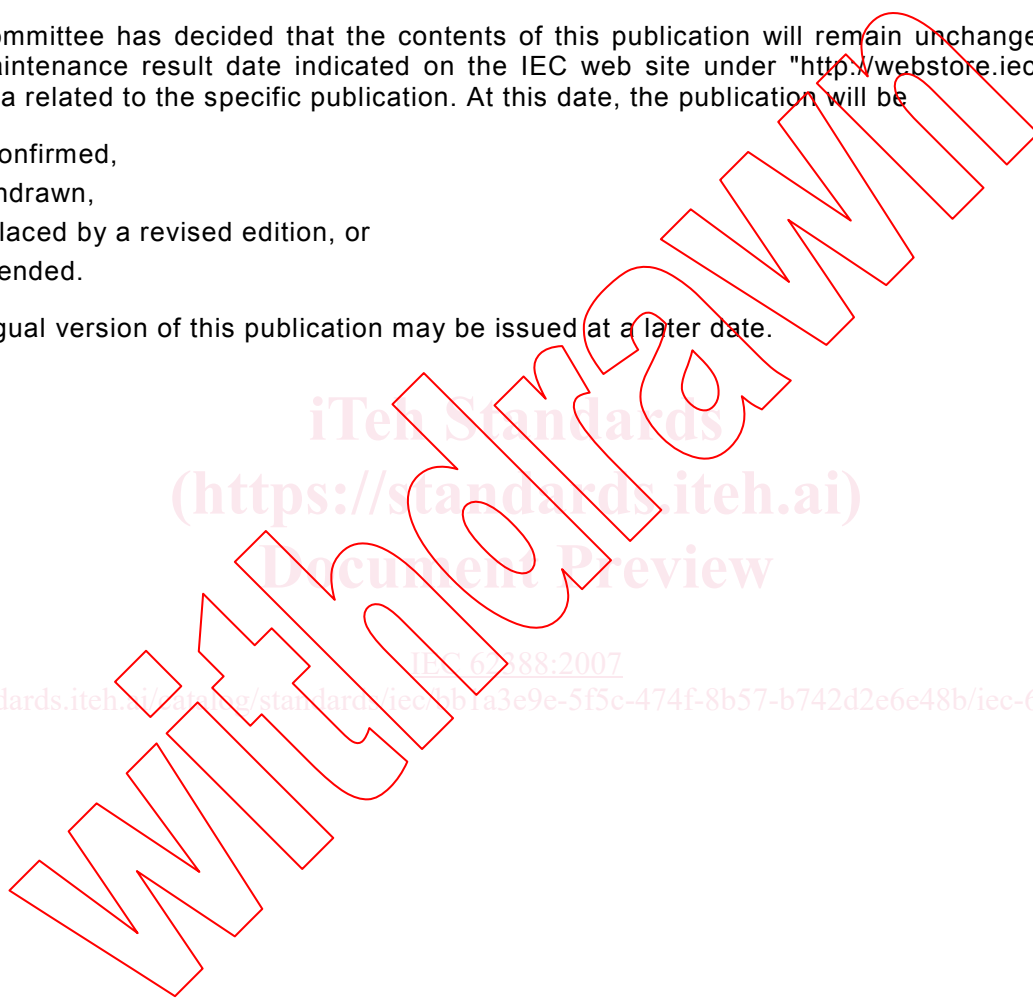

iTech Standards
(<https://standards.itih.ai>)
Document Preview

<https://standards.itih.ai/standards/iec/62388:2007>
<https://standards.itih.ai/standards/iec/62388:2007>