



Standard Specification for Residential Basketball Systems¹

This standard is issued under the fixed designation F 1882; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last approval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers the manufacture, assembly, recommended maintenance and use of complete residential basketball systems.

1.2 This specification is intended to reduce the potential hazards associated with the installation and use of residential basketball systems.

1.3 This specification is not intended to apply to the following:

1.3.1 Equipment intended to be used in places of public assembly, such as, but not limited to, schools, parks, public and private recreational facilities.

1.3.2 Individual components, such as rim, backboard, pole, portable base system, net, or other component when that component is not sold as a complete residential basketball system as defined in this specification.

1.3.3 Any residential basketball system that is mounted to any structure or surface other than that which is purchased as part of a complete residential basketball system. Examples include, but are not limited to, roof mounting, wall mounting, or any locally or self-manufactured components.

1.3.4 Any basketball equipment that does not use a full size rim, 18-in. (45.72-cm) diameter, or is designed for operational heights of less than 6 ft 6 in. (1.98 m) from the playing surface to the bottom of the backboard.

1.3.5 Accessories and add-ons.

1.4 This specification shall apply only to products manufactured after six months from the date this specification is published.

1.5 This specification does not cover product performance or quality, except as related to safety.

1.6 The tests are intended to uncover hazards, rather than to demonstrate the reliability of the system. The fact that a mechanism or material of a system fails during testing only is relevant if the failure creates a potential hazard.

1.7 The rationale for provisions in this specification are given in Appendix X1 and Appendix X2.

2. Referenced Documents

2.1 ASTM Standards:

¹ This specification is under the jurisdiction of ASTM Committee F-08 on Sports Equipment and Facilities and is the direct responsibility of F08.25 on Residential Basketball Equipment.

Current edition approved April 10, 1998. Published September 1998.

D 2240 Test Method for Rubber Property—Durometer Hardness²

F 1148 Consumer Safety Performance Specification for Home Playground Equipment³

2.2 Federal Standards:

16 CFR 1303 Ban of Lead-Containing Paint and Certain Consumer Products Bearing Lead-Containing Paint⁴

16 CFR 1500.48 Technical Requirements for Determining a Sharp Point in Toys and Other Articles Intended for Use by Children Under 8-Years of Age⁴

16 CFR 1500.49 Technical Requirements for Determining a Sharp Metal or Glass Edge in Toys and Other Articles Intended for Use by Children Under 8-Years of Age⁴

2.3 ANSI Z535 Warning Labels⁵

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.1.1 *accessories and add-ons* (items not covered in 3.1.3, 3.1.6, 3.1.8 and 3.1.14–3.1.15), *n*—including but not limited to, such things as ball returns, scoring and training devices, and including items attached to the system not intended for use in basketball.

3.1.2 *adjusting mechanism*, *n*—moveable components that lock structural components in the desired position to facilitate changes in rim height.

3.1.3 *backboard*, *n*—rigid, flat surface to provide rebound surface for a basketball.

3.1.4 *complete residential basketball system*, *n*—any combination of rim, net, backboard, portable or nonportable pole-type support system not specifically excluded in 1.3.1–1.3.5 that is designed and marketed by the original manufacturer to be used together, whether packaged together as a system, or separately as individual components.

3.1.5 *footing*, *n*—the method for securing the placement of the system into the ground.

3.1.6 *full-size rim*, *n*—moveable or fixed-type rim with an 18-in. (45.72-cm) inside diameter.

² Annual Book of ASTM Standards, Vol 09.01.

³ Annual Book of ASTM Standards, Vol 15.07.

⁴ Available from the Consumer Product Safety Commission, Washington, DC 20207.

⁵ Available from NEMA, 2101 “L” Street, NW, Suite 300, Washington, DC 20037–1580.

3.1.7 *ground base systems, n*—systems that have a main support pole attached in ground by a footing.

3.1.8 *net, n*—a device that hangs below the rim that restricts the downward movement of the ball.

3.1.9 *normal access area, n*—as described in Fig. 1.

3.1.10 *normal use, n*—those safe-play modes that conform to the instructions that accompany the equipment. Misuse, alteration, or modification are not considered normal use.

3.1.11 *pinch, crush, shear points, n*—any point that entraps at one or more positions a ½-in. (13-mm) diameter neoprene rod. Entrapment shall mean that force of more than 2 lb (0.90 kg) is required to pull out the rod. The neoprene rods shall have

a hardness reading between 50 and 60 as determined by a Type A Durometer as given in Test Method D 2240.

3.1.12 *pole joint, n*—mechanical method for connecting a multiple segment pole.

3.1.13 *portable base systems, n*—systems that have a ballast type support system that allows the system to be moved.

3.1.14 *residential basketball equipment, n*—equipment that is intended for the normal use and play in residential basketball that includes the components given in 3.1.3, 3.1.6, 3.1.8 and 3.1.15.

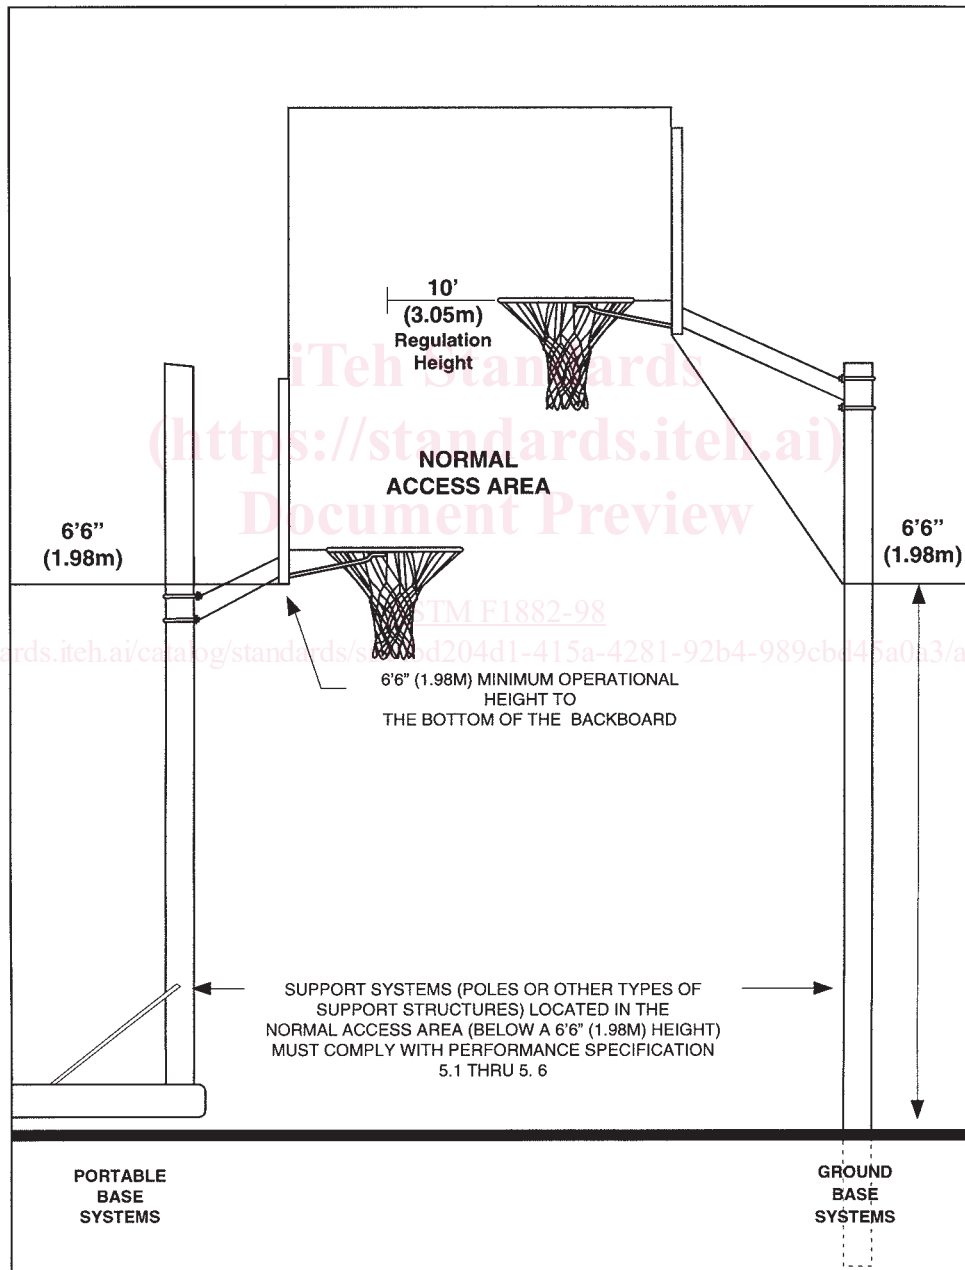


FIG. 1 Normal Access Area

3.1.15 *supplemental restraint systems, n*—additional methods of adding stability over and above recommended ballast to portable base systems, that is ground stakes and additional weight.

3.1.16 *support system, n*—structure provided to support rim and backboard in playing position. Could include pole, portable base, or mounting brackets.

4. General Requirements

4.1 This specification is applicable to all complete residential basketball systems, that is, basketball systems represented as complying with this performance specification, shall meet all applicable requirements specified herein.

5. Performance Requirements

5.1 *General*—The standards listed in 5.3-5.6 apply only to the normal access area as described in 3.1.9 and Fig. 1.

5.2 *Paint Toxicity*—All paints and finishes used on basketball equipment shall be in accordance with 16 CFR Part 1303.

5.3 *Edges, Points, and Surfaces*—Following assembly of the system, in accordance with the instructions to be provided to the consumer, there shall be no exposed sharp edges, points, or surfaces on any portion of the residential basketball equipment according to CPSC 16CFR 1500.48 and 1500.49.

5.4 There shall be no pinch, crush, or shear points as defined in 3.1.11.

5.5 Moving parts or height adjustment mechanisms outside the normal access area, which could pose a finger entrapment problem, shall be noted clearly in the warning label on the system and the safety instructions for proper use to reduce the risk of injury.

5.6 Hardware:

5.6.1 *Protruding Bolts*—By design, exposed bolt ends should not protrude beyond the nuts more than the diameter of the bolt when the nuts are tightened according to the manufacturer's instructions. If the threaded ends of the exposed bolts or rods do protrude beyond the maximum described, they must be protected by smooth, secure fitting caps.

5.6.2 Lock washers, self-locking nuts, or other locking means shall be provided for all permanently attached bolts.

5.6.3 *Surrounding Surfaces Around Bolts and Nuts*—The surrounding surface shall be blended whenever possible to create smooth contours without abrupt changes in shape that could pose a potential hazard.

6. Stability/Structural Integrity

6.1 *Portable Base System Testing (To Be Performed by the Manufacturer)*—The test should be performed to determine the ability of the portable base system to withstand anticipated forces which act to tip, slide, or cause permanent deformation, or a combination thereof, to the system. Complete assembly/installation according to manufacturer's recommendations. The force for all tests shall be applied gradually within a period of 1 min and maintained for a period of 5 min. All tests are to be performed at a room temperature of $68 \pm 5^\circ\text{F}$ ($22 \pm 15^\circ\text{C}$). This test must be performed with rim at 10-ft (3.05-m) regulation height and through its entire recommended adjustment range. The system must be tested without additional

supplemental restraint systems. After conducting the tests, there shall be no visible cracks, permanent deformation, breakage, or deterioration of any component that may adversely affect the structural integrity or safety of the equipment.

6.1.1 *Horizontal Testing (Fig. 2)*—To simulate a 40-mph (64.4-kph) wind force, calculate the square footage of the backboard and refer to Fig. 3 to determine the horizontal load required to replicate the wind force. For Test No. 1, apply this horizontal load as shown in Fig. 2. If the rim height at the point of load application drops more than 6 in. (15.24 cm), stop the test and reposition the pulley. Proceed to Test No. 2. For Test No. 2, if required, with pulley realigned 6 in. (15.2 cm) lower, reapply horizontal test load and check if rim height drops more than 6 in. (15.24 cm). If so, repeat in 6-in. (15.14-cm) pulley height reduction segments. The test must be performed in both forward and rearward directions, and the system must not tip over beyond the balance point, in accordance with Fig. 4.

6.1.2 *Horizontal Rim Weight (Fig. 5)*—Determine the weight of the system (at the rim) while in a level horizontal position (80 lb (36.39 kg) max).

6.1.3 *Vertical Minimum Load (Fig. 2)*—This load is 101.25 lb (45.93 kg), and it must be applied vertically from the tip of the rim. With the required load, system must not tip over past its balance point in accordance with Fig. 4.

6.1.4 *Balance Point of System Testing (Fig. 4)*—Pull system forward to the point of balance where it will not fall forward or backward. The maximum distance between the tip of rim and the ground should be less than 5 ft 6 in. (1.68 m). When the system is released backwards above the natural balance point, it must return system to the normal upright position.

6.1.5 *Horizontal Side Testing (Fig. 6)*—With a 25-lb (11.34-kg) load, the portable system must not tip over sideways to such a point where the rim/backboard touches the ground.

6.1.6 *Portability Test on an Incline (Fig. 7)*—When following manufacturer's recommendations for moving the portable system, the system must remain in its transport (movable) position when placed on a 5° slope in any direction.

6.1.7 When following the manufacturer's recommendations for moving the portable system, the system must be capable of being moved a distance of 50 ft (15.24 m).

6.2 *Ground Base System Testing (to be performed by the manufacturer)*—The test should be performed to determine the ability of the ground base system to withstand anticipated forces which act to tip, slide, or cause permanent deformation, or a combination thereof, to the system. Complete assembly/installation according to manufacturer's recommendations.


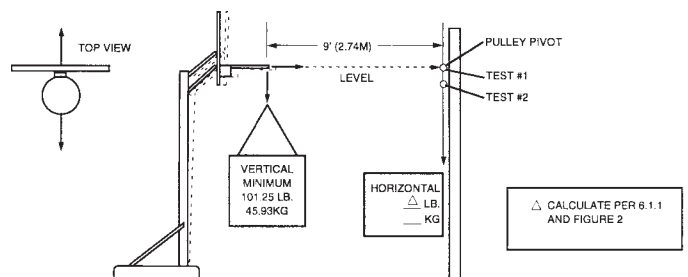


FIG. 2 Portable Base Horizontal and Vertical Testing

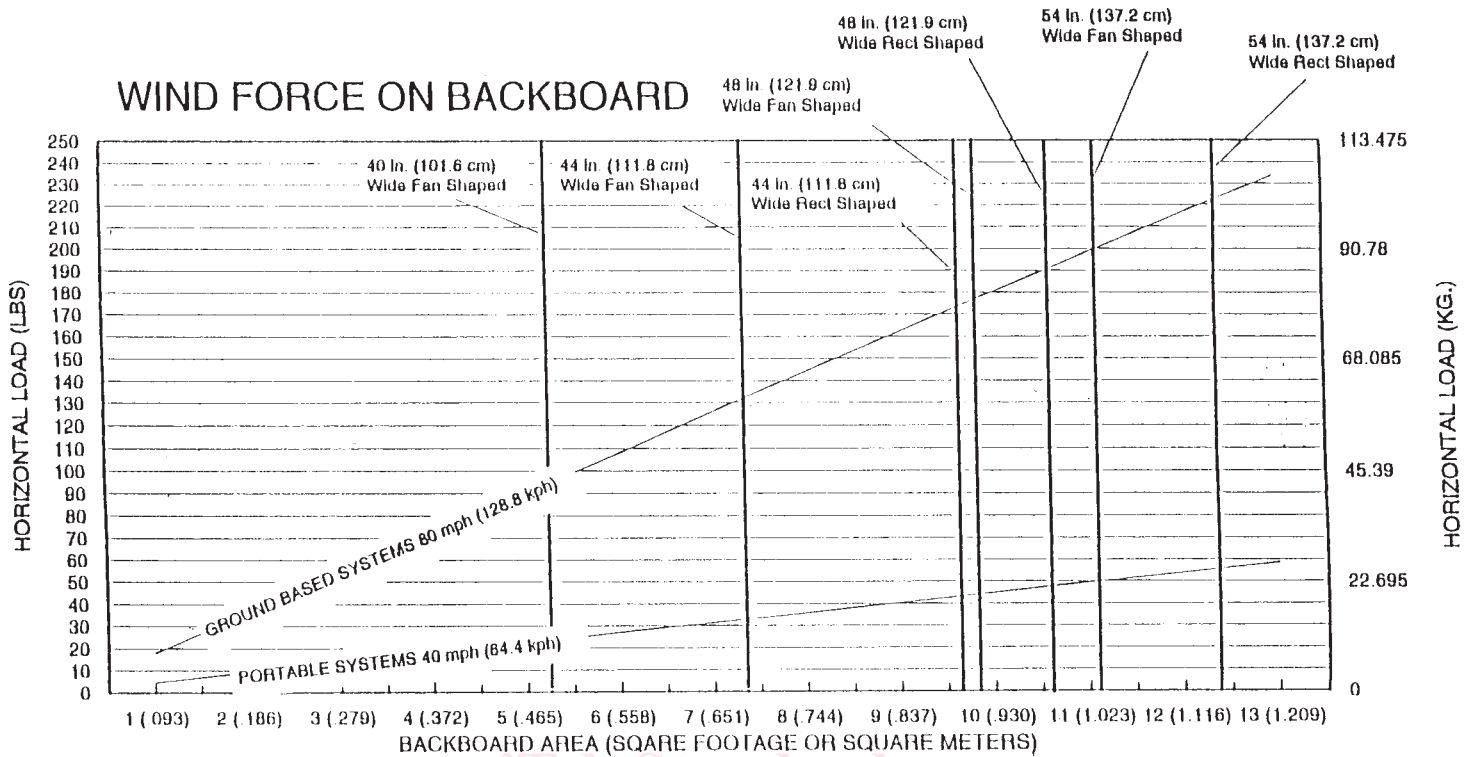

- Assumptions:
- 1) Normal properties of air at sea level.
 - 2) Wind force acting on centroid of backboard area.
 - 3) Backboard surface is perpendicular to airflow.
 - 4) Backboard sizes indicated are approximate. Calculate exact backboard area using the actual dimensions of the backboard being tested.
 - 5) Load at rim assumes centroid is located 10% higher.

FIG. 3 Wind Force on Backboard

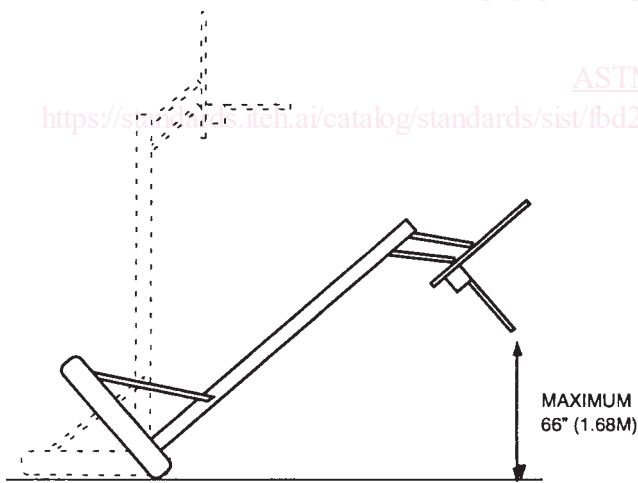


FIG. 4 Portable Base Balance Point of System Testing

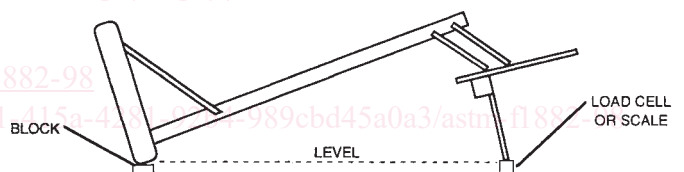


FIG. 5 Portable Base Horizontal Rim Weight Determination

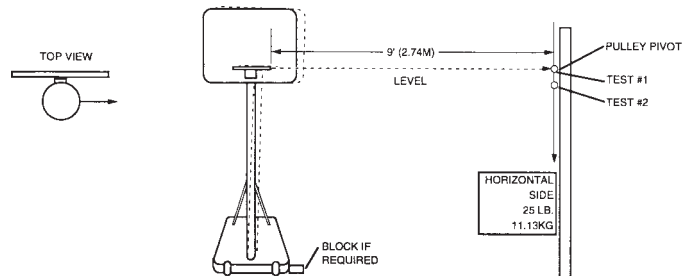


FIG. 6 Portable Base Horizontal Side Testing

The force for all tests shall be applied gradually within a period of 1 min and maintained for a period of 5 min. This test must be performed with rim at 10-ft (3.05-m) regulation height and through its entire recommended adjustment range. After conducting the tests, there shall be no visible cracks, permanent deformation, breakage or deterioration of any component that may adversely affect the structural integrity or safety of the equipment.

6.2.1 *Horizontal Testing (Fig. 8)*—To simulate a 80-mph (128.8-kph) wind force, calculate the square footage of back-

board and refer to Fig. 2 to determine the horizontal load required to replicate the wind force. For Test No. 1, apply this horizontal load in accordance with Fig. 8. If the rim height drops more than 6 in. (15.24 cm) stop test and reposition pulley. Proceed to Test No. 2. For Test No. 2, if required, with the pulley realigned 6 in. (15.24 cm) lower, reapply horizontal test load and check if rim height drops more than 6 in. (15.24