

INTERNATIONAL STANDARD

**Communication networks and systems for power utility automation –
Part 7-410: Hydroelectric power plants – Communication for monitoring and
control**

(<https://standards.iteh.ai>)

Document Preview

IEC 61850-7-410:2007

<https://standards.iteh.ai/catalog/standards/iec/60318f6d-7aad-4961-a6c8-58f403fedd5f/iec-61850-7-410-2007>

Withhold



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00



IEC 61850-7-410

Edition 1.0 2007-08

INTERNATIONAL STANDARD

**Communication networks and systems for power utility automation –
Part 7-410: Hydroelectric power plants – Communication for monitoring and
control**

Document Preview
(<https://standards.iteh.ai>)

IEC 61850-7-410:2007

<https://standards.iteh.ai/collections/standards/iec/607118f6d-7aad-4961-a6c8-58f403fedd5f/iec-61850-7-410-2007>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XC**

ICS 33.200

ISBN 2-8318-9254-6

CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references.....	9
3 Terms and definitions.....	10
4 Abbreviations.....	10
5 Basic concepts for hydropower plant control and supervision.....	11
5.1 Functionality of a hydropower plant.....	11
5.2 Principles for water control in a river system.....	11
5.2.1 General.....	11
5.2.2 Principles for electrical control of a hydropower plant.....	12
5.3 Logical structure of a hydropower plant.....	13
6 Modelling concepts and examples.....	19
6.1 The concept of Logical Devices.....	19
6.2 Logical nodes for sensors, transmitters, supervising and monitoring functions.....	19
6.3 Address strings.....	20
6.4 Naming of logical nodes.....	21
6.5 Recommended naming structure for automatic control functions.....	21
6.6 Summary of logical nodes to be used in hydropower plants.....	22
6.6.1 General.....	22
6.6.2 Group C – Control functions.....	23
6.6.3 Group F – Functional blocks.....	23
6.6.4 Group H – Hydropower specific logical nodes.....	23
6.6.5 Group I – Interface and archiving.....	24
6.6.6 Group K – Mechanical and non-electrical primary equipment.....	25
6.6.7 Group L – Physical devices and common logical nodes.....	25
6.6.8 Group M – Metering and measurement.....	25
6.6.9 Group P – Protection functions.....	25
6.6.10 Group R – Protection related functions.....	26
6.6.11 Group S – Supervision and monitoring.....	26
6.6.12 Group T – Transducers and instrument transformers.....	27
6.6.13 Group X – Switchgear.....	27
6.6.14 Group Y – Power transformers.....	27
6.6.15 Group Z – Power system equipment.....	28
7 Logical Node Classes.....	28
7.1 Abbreviations and definitions used in Logical Node tables.....	28
7.1.1 Interpretation of Logical Node tables.....	28
7.1.2 Abbreviated terms used in Attribute Names.....	29
7.2 Logical Nodes representing functional blocks LN group F.....	30
7.2.1 Modelling remarks.....	30
7.2.2 LN: Counter Name: FCNT.....	30
7.2.3 LN: Curve shape description Name: FCSD.....	30
7.2.4 LN: Generic Filter Name: FFIL.....	31
7.2.5 LN: Control function output limitation Name: FLIM.....	31
7.2.6 LN: PID regulator Name: FPID.....	32

7.2.7	LN: Ramp function Name: FRMP	33
7.2.8	LN: Set-point control function Name: FSPT	34
7.2.9	LN: Action at over threshold Name: FXOT	35
7.2.10	LN: Action at under threshold Name: FXUT	35
7.3	Hydropower specific Logical Nodes LN group H	36
7.3.1	Modelling remarks	36
7.3.2	LN: Turbine – generator shaft bearing Name: HBRG	36
7.3.3	LN: Combinator Name: HCOM	36
7.3.4	LN: Hydropower dam Name: HDAM	37
7.3.5	LN: Dam leakage supervision Name: HDLS	37
7.3.6	LN: Gate position indicator Name: HGPI	37
7.3.7	LN: Dam gate Name: HGTE	38
7.3.8	LN: Intake gate Name: HITG	38
7.3.9	LN: Joint control Name: HJCL	39
7.3.10	LN: Leakage supervision Name: HLKG	40
7.3.11	LN: Water level indicator Name: HLVL	40
7.3.12	LN: Mechanical brake Name: HMBR	41
7.3.13	LN: Needle control Name: HNDL	41
7.3.14	LN: Water net head data Name: HNHD	41
7.3.15	LN: Dam over-topping protection Name: HOTP	42
7.3.16	LN: Hydropower/water reservoir Name: HRES	42
7.3.17	LN: Hydropower unit sequencer Name: HSEQ	43
7.3.18	LN: Speed monitoring Name: HSPD	43
7.3.19	LN: Hydropower unit Name: HUNT	44
7.3.20	LN: Water control Name: HWCL	45
7.4	Logical Nodes for interface and archiving LN group I	45
7.4.1	Modelling remarks	45
7.4.2	LN: Safety alarm function Name: ISAF	46
7.5	Logical Nodes for mechanical and non-electric primary equipment LN group K	46
7.5.1	Modelling remarks	46
7.5.2	LN: Fan Name: KFAN	46
7.5.3	LN: Filter Name: KFIL	47
7.5.4	LN: Pump Name: KPMP	47
7.5.5	LN: Tank Name: KTNK	48
7.5.6	LN: Valve control Name: KVLV	48
7.6	Logical Nodes for metering and measurement LN group M	49
7.6.1	Modelling remarks	49
7.6.2	LN: Environmental information Name: MENV	49
7.6.3	LN: Hydrological information Name: MHYD	49
7.6.4	LN: DC measurement Name: MMDC	50
7.6.5	LN: Meteorological information Name: MMET	50
7.7	Logical Nodes for protection functions LN group P	51
7.7.1	Modelling remarks	51
7.7.2	LN: Rotor protection Name: PRTR	52
7.7.3	LN: Thyristor protection Name: PTHF	52
7.8	Logical nodes for protection related functions LN Group R	52
7.8.1	Modelling remarks	52
7.8.2	LN: synchronising or synchro-check device Name: RSYN	52

7.9	Logical Nodes for supervision and monitoring LN group S	54
7.9.1	Modelling remarks	54
7.9.2	LN: temperature supervision Name: STMP	54
7.9.3	LN: vibration supervision Name: SVBR.....	54
7.10	Logical Nodes for instrument transformers and sensors LN group T	55
7.10.1	Modelling remarks	55
7.10.2	LN: Angle sensor Name: TANG	55
7.10.3	LN: Axial displacement sensor Name: TAXD.....	55
7.10.4	LN: Distance sensor Name: TDST	56
7.10.5	LN: Flow sensor Name: TFLW	56
7.10.6	LN: Frequency sensor Name: TFRQ	56
7.10.7	LN: Humidity sensor Name: THUM	57
7.10.8	LN: Level sensor Name: TLEV.....	57
7.10.9	LN: Magnetic field sensor Name: TMGF	57
7.10.10	LN: Movement sensor Name: TMVM.....	57
7.10.11	LN: Position indicator Name: TPOS	58
7.10.12	LN: Pressure sensor Name: TPRS.....	58
7.10.13	LN: Rotation transmitter Name: TRTN	58
7.10.14	LN: Sound pressure sensor Name: TSND	59
7.10.15	LN: Temperature sensor Name: TTMP.....	59
7.10.16	LN: Mechanical tension /stress sensor Name: TTNS.....	59
7.10.17	LN: Vibration sensor Name: TVBR.....	60
7.10.18	LN: Water pH sensor Name: TWPH.....	60
7.11	Logical Nodes for power system equipment LN group Z	60
7.11.1	Modelling remarks	60
7.11.2	LN: Neutral resistor Name: ZRES	60
7.11.3	LN: Semiconductor rectifier controller Name: ZSCR.....	61
7.11.4	LN: Synchronous machine Name: ZSMC	61
8	Data name semantics	63
9	Common data classes	76
9.1	General.....	76
9.2	Device ownership and operator (DOO)	76
9.3	Maintenance and operational tag (TAG)	76
9.4	Operational restriction (RST).....	77
10	Data attribute semantics.....	77
Annex A (informative) Algorithms used in logical nodes for automatic control		80
Bibliography.....		86
Figure 1 – Structure of a hydropower plant		11
Figure 2 – Principles for the joint control function.....		13
Figure 3 – Water control functions		14
Figure 4 – Water flow control of a turbine.....		15
Figure 5 – Typical turbine control system.....		16
Figure 6 – Excitation system.....		17
Figure 7 – Electrical protections of a generating unit.....		18

Figure 8 – Conceptual use of transmitters	19
Figure 9 – Logical Device Name	20
Figure 10 – Example of naming structure, in a pumped storage plant, based on IEC 61346-1	20
Figure A.1 – Example of curve based on an indexed gate position providing water flow	80
Figure A.2 – Example of curve based on an indexed guide vane position (x axis) vs net head (y axis) giving an interpolated Runner Blade position (Z axis)	81
Figure A.3 – Example of a proportional-integral-derivate controller	82
Figure A.4 – Example of a Power stabilisation system	83
Figure A.5 – Example of a ramp generator	83
Figure A.6 – Example of an interface with a set-point algorithm	84
Figure A.7 – Example of a physical connection to a set-point device	85
Table 1 – Example of Logical Device over-current protection	19
Table 2 – recommended LN prefixes	22
Table 3 – Logical nodes for control functions	23
Table 4 – Logical nodes representing functional blocks	23
Table 5 – Hydropower specific logical nodes	23
Table 6 – Logical nodes for interface and archiving	24
Table 7 – Logical nodes for mechanical and non-electric primary equipment	25
Table 8 – Logical nodes for physical devices and common LN	25
Table 9 – Logical nodes for metering and measurement	25
Table 10 – Logical nodes for protections	26
Table 11 – Logical nodes for protection related functions	26
Table 12 – Logical nodes for supervision and monitoring	26
Table 13 – Logical nodes for sensors	27
Table 14 – Logical nodes for switchgear	27
Table 15 – Logical nodes for power transformers	27
Table 16 – Logical nodes for power system equipment	28
Table 17 – Interpretation of Logical Node tables	28
Table 18 – Conditional attributes in FPID	32
Table 19 – Description of data	63
Table 20 – Semantics of data attributes	78

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**COMMUNICATION NETWORKS AND SYSTEMS
FOR POWER UTILITY AUTOMATION –**

**Part 7-410: Hydroelectric power plants –
Communication for monitoring and control**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees, any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61850-410 has been prepared by IEC technical committee 57: *Power systems management and associated information exchange*.

It has been decided to amend the general title of the IEC 61850 series to *Communication networks and systems for power utility automation*. Henceforth, new editions within the IEC 61850 series will adopt this new general title.

The text of this standard is based on the following documents:

FDIS	Report on voting
57/886/FDIS	57/905/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61850 series, under the general title *Communication networks and systems for power utility automation*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

Withdrawing

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

IEC 61850-7-410:2007
<https://standards.iteh.ai/catalog/standards/iec/607118f6d-7aad-4961-a6c8-58f403fedd5f/iec-61850-7-410-2007>

INTRODUCTION

The present standard includes all additional logical nodes, not included in IEC 61850-7-4:2003, required to represent the complete control and monitoring system of a hydropower plant.

Most of the Logical Nodes in IEC 61850-7-410 that are of general use, Logical Nodes the names of which do not start with the letter “H”, will be transferred to the future Edition 2 of IEC 61850-7-4. In the same manner, all Common Data Classes specified in IEC 61850-7-410 will be transferred to future Edition 2 of IEC 61850-7-3.

Once future Editions 2 of IEC 61850-7-3 and IEC 61850-7-4 are published, IEC 61850-7-410 will be revised to include only those Logical Nodes that are specific to hydropower use.

Before Edition 2 of IEC 61850-7-410 is published, there will be a period where the Common Data Class (CDC) and Logical Node (LN) specifications will overlap with IEC 61850-7-3 (future Edition 2) and IEC 61850-7-4 (future Edition 2). During this time, the specifications in IEC 61850-7-3 (future Edition 2) and IEC 61850-7-4 (future Edition 2) will apply.

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 61850-7-410:2007](https://standards.iteh.ai/standards/iec/60318f6d-7aad-4961-a6c8-58f403fedd5f/iec-61850-7-410-2007)

<https://standards.iteh.ai/standards/iec/60318f6d-7aad-4961-a6c8-58f403fedd5f/iec-61850-7-410-2007>

WITHDRAWN

COMMUNICATION NETWORKS AND SYSTEMS FOR POWER UTILITY AUTOMATION –

Part 7-410: Hydroelectric power plants – Communication for monitoring and control

1 Scope

IEC 61850-7-410 is part of the IEC 61850 series. This part of IEC 61850 specifies the additional common data classes, logical nodes and data objects required for the use of IEC 61850 in a hydropower plant.

The Logical Nodes and Data Objects defined in this part of IEC 61850 belong to the following fields of use:

- **Electrical functions.** This group includes LN and DO used for various control functions, essentially related to the excitation of the generator. New LN and DO defined within this group are not specific to hydropower plants; they are more or less general for all types of larger power plants.
- **Mechanical functions.** This group includes functions related to the turbine and associated equipment. The specifications of this document are intended for hydropower plants, modifications might be required for application to other types of generating plants. Some more generic functions are though defined under Logical Node group K.
- **Hydrological functions.** This group of functions includes objects related to water flow, control and management of reservoirs and dams. Although specific for hydropower plants, the LN and DO defined here can also be used for other types of utility water management systems.
- **Sensors.** A power plant will need sensors providing measurements of other than electrical data. With a few exceptions, such sensors are of general nature and not specific for hydropower plants.

NOTE All Logical Nodes with names not starting with the letter "H" will be included in a future edition 2 of IEC 61850-7-4. When that document is published, the Logical Nodes in IEC 61850-7-4 (Edition 2) will take precedence over Logical Nodes with the same name in this part IEC 61850-7-410.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies:

IEC 61850-2, *Communication networks and systems in substations – Part 2: Glossary*

IEC 61850-5, *Communication networks and systems in substations – Part 5: Communication requirements for functions and device models*

IEC 61850-6, *Communication networks and systems in substations – Part 6: Configuration description language for communication in electrical substations related to IEDs*

IEC 61850-7-2:2003, *Communication networks and systems in substations – Part 7-2: Basic communication structure for substation and feeder equipment – Abstract communication services interface (ACSI)*

IEC 61850-7-3:2003, *Communication networks and systems in substations – Part 7-3: Basic communication structure for substation and feeder equipment – Common data classes*

IEC 61850-7-4:2003, *Communication networks and systems in substations – Part 7-4: Basic communication structure for substation and feeder equipment – Compatible logical node classes*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61850-2 apply.

4 Abbreviations

In general, the abbreviations defined in IEC 61850-2 apply. The following abbreviations are repeated here for convenience.

ASG	Analogue setting
BSC	Binary controlled step position information
CDC	Common data class
CIM	Common information model (reference to IEC 61970-301)
CMV	Complex measured value
DO	Data object
DPC	Double point control
DPL	Device name-plate
DPS	Double point status information
HMI	Human machine interface
IED	Intelligent electronic device
INC	Controllable integer status
ING	Integer status setting
INS	Integer status
LD	Logical device
LN	Logical node
MV	Measured value
PD	Physical device
PID	Proportional – Integrating – Derivative regulator
SAV	Sampled analogue value
SMV	Sampled measured value
SPC	Single point control
SPS	Single point status

WYE Phase to ground related measured values of a three-phase system

5 Basic concepts for hydropower plant control and supervision

5.1 Functionality of a hydropower plant

Figure 1 below is based on the substation structure described in IEC 61850-6. A typical power plant will include a “substation” part that will be identical to what is described in the IEC 61850 series. The generating units with their related equipment are added to the basic structure.

A generating unit does consist of a turbine – generator set with auxiliary equipment and supporting functions. Generator transformers can be referenced as normal substation transformers; there is not always any one-to-one connection between generating units and transformers.

The dam is a different case. There is always one dam associated with a hydropower plant. There are however reservoirs that are not related to any specific power plant as well as there are power plants from which more than one dam are being controlled. While all other objects can be addressed through the power plant, dams might have to be addressed directly.

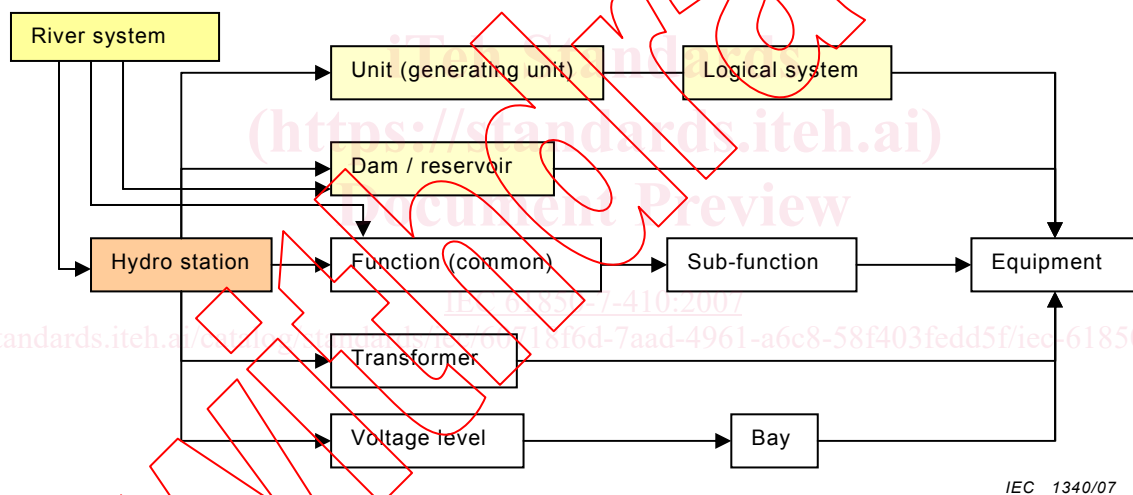


Figure 1 – Structure of a hydropower plant

There is, however, no standardised way of arranging overall control functions, the structure will depend on whether the plant is manned or remote operated, as well as traditions within the utility that owns the plant. In order to cover most arrangements, some of the Logical Nodes defined in this part of IEC 61850 more or less overlap. This will allow the user to arrange Logical Devices by selecting the most appropriate Logical Nodes that suits the actual design and methods of operation of the plant. Other Logical Nodes are very small, in order to provide simple building blocks that will allow as much freedom as possible in arranging the control system.

Some control functions do work more or less autonomously after being started and stopped by the start/stop sequencer. Such functions include the cooling system for the generator and the lubrication oil system for the bearings.

5.2 Principles for water control in a river system

5.2.1 General

The water control of river systems and hydropower plants can follow different strategies, depending on the external requirements put on the operation of the system.

a) Water flow control

In this type of control, the power production is roughly adapted to the water flow that is available at the moment. The rate of flow is controlled while the water level is allowed to vary between high and low alarm levels in the dams. The dams are classified after the time over which the inflow and outflow shall add up (daily, weekly etc.).

b) Water level control

In some locations, there are strict limits imposed on the allowed variation of the water level of the dam. This might be due to maritime shipping or by other environmental requirements. In this case, the upper water level of the dam is the overriding concern, power production is adjusted by the water level control function to provide correct flow to maintain the water level.

c) Cascade control

In rivers with more than one power plant, the overall water flow in the river is coordinated between plants to ensure an optimal use of the water. Each individual plant can be operated according to the water level model or the water flow model as best suited, depending on the capacity of the local dam and allowed variation in water levels. The coordination is normally done at dispatch centre level, but power plants often have feed-forward functions that will automatically notify the next plant downstream if there is a sudden change of water flow.

Power plants with more than one generating unit and/or more than one dam gate, can be provided with a joint control function that controls the total water flow through the plant as well as the water level control.

5.2.2 Principles for electrical control of a hydropower plant

A power plant can be operated in different modes: active power production mode or condenser mode. The generator can be used as a pure synchronous condenser, without any active power production and with the runner spinning in air.

In a pumped storage plant, there is a motor mode for the generator. A generator in a pumped storage plant can also be used for voltage control in a synchronous condenser mode, in this case, normally with an empty turbine chamber.

The following steady states are defined for the unit:

- a) *Excited, not connected* – Field current is applied and a voltage is generated, the generator is however not connected to any load, there is no significant stator current.
- b) *Synchronised* – The generator is synchronised to an external network. This is the normal status of an operating generator.
- c) *Synchronised in condenser mode* – The generator is synchronised. However it does not primarily produce active power. In condenser mode, it will produce or consume reactive power, in generation- or pump-direction (for pumped storage), it consumes active power.
- d) *Island operation mode* – The external network has been separated and the power plant shall control the frequency.
- e) *Local supply mode* – In the case of a larger disturbance of the external network, one or more generators in a power plant can be set at a minimum production to provide power for local supply only. This type of operation is common in thermal power plants to shorten the start-up time once the network is restored, but can also be used in hydropower plants for practical reasons.