

TECHNICAL REPORT

INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**Specification for radio disturbance and immunity measuring apparatus and methods –
Part 2-5: In situ measurements of disturbing emissions produced by physically large equipment**

Document Preview

CISPR TR 16-2-5:2008

<https://standards.iteh.ai/catalog/standards/iec/719d1500-2173-47db-85c4-f4862c708a6f/cispr-tr-16-2-5-2008>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2008 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

TECHNICAL REPORT

INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**Specification for radio disturbance and immunity measuring apparatus and methods –
Part 2-5: In situ measurements of disturbing emissions produced by physically large equipment**

iteh Standards
(<https://standards.iteh.ai>)
Document Preview

[CISPR TR 16-2-5:2008](https://standards.iteh.ai/catalog/standards/iec/719d1500-2173-47db-85c4-f4862c708a6f/cispr-tr-16-2-5-2008)

<https://standards.iteh.ai/catalog/standards/iec/719d1500-2173-47db-85c4-f4862c708a6f/cispr-tr-16-2-5-2008>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	6
4 Methodology.....	7
4.1 Structure of each measurement.....	7
4.2 Preliminary measurements and selection of measurement method	8
4.3 Selection of the EUT mode of operation and the reference point depending on the environment.....	8
4.4 Assessment of measurement results	9
5 Method of <i>in situ</i> measurement of conducted disturbance.....	9
5.1 General.....	9
5.2 Conducted emission measurement procedure	10
5.2.1 Connection conditions	10
5.2.2 Reference ground for <i>in situ</i> measurements.....	10
5.2.3 Disturbance voltage/current measurements on cables which carry wanted symmetrical signals	10
5.2.4 Disturbance voltage measurements on cables which do not carry wanted symmetrical signals	11
6 Method of <i>in situ</i> measurement of radiated disturbance	11
6.1 General.....	11
6.2 Measurement conditions.....	12
6.3 Measurement methods	12
6.3.1 Measurement parameters.....	12
6.3.2 Measurements in case of interference complaints.....	12
6.3.3 Measurements for compliance purposes	13
6.3.4 Measurements below 30 MHz	13
7 Measurement report	13
 Bibliography.....	 15
 Figure 1 – Enclosure port.....	 8

INTERNATIONAL ELECTROTECHNICAL COMMISSION
INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

**SPECIFICATION FOR RADIO DISTURBANCE AND IMMUNITY
MEASURING APPARATUS AND METHODS –**

**Part 2-5: *In situ* measurements of disturbing emissions
produced by physically large equipment**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

CISPR 16-2-5, which is a technical report, has been prepared by CISPR subcommittee H: Limits for the protection of radio services.

The text of this standard is based on the following documents:

Enquiry draft	Report on voting
CISPR/H/161/DTR	CISPR/H/172/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the CISPR 16 series, published under the general title *Specification for radio disturbance and immunity measuring apparatus and methods*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[CISPR TR 16-2-5:2008](#)

<https://standards.iteh.ai/catalog/standards/iec/719d1500-2173-47db-85c4-f4862c708a6f/cispr-tr-16-2-5-2008>

SPECIFICATION FOR RADIO DISTURBANCE AND IMMUNITY MEASURING APPARATUS AND METHODS –

Part 2-5: *In situ* measurements of disturbing emissions produced by physically large equipment

1 Scope

This part of CISPR 16 deals with *in situ* electromagnetic disturbance measurements in any environment from physically large equipment and systems excluding networks.

It covers both radiated and conducted emission phenomena, and does not deal with immunity tests.

This technical report is intended to be applied primarily to such physically large equipment which are not under the scope of any existing emission standards (as for example CISPR 11 and CISPR 22). It serves only as a guideline on how to deal with emissions of that equipment at the particular location of installation. It does not establish any emission requirements.

NOTE 1 Although this technical report is intended to be applied to equipment which is not under the scope of any existing emission standards, it may be used also in such cases in order to serve as additional information for carrying out *in situ* measurements for any type of large equipment.

NOTE 2 Examples of large equipment are: production machines, conveyors, large displays, aircraft simulators, traffic control equipment, etc.

Due to the severe impact of the conditions existing at a particular location of operation and the use of the respective large equipment, however, it is not intended to use the measurements in the frame of type testing.

NOTE 3 In general, type testing on large equipment is only possible at standardized test sites in a controlled environment. The assessment results obtained under *in situ* conditions are only valid for the respective individual large equipment actually measured at its particular place of installation. These results cannot be transposed to other equipment of the same type, but installed at other locations.

Reference *in-situ* measurement distances will be given. This allows comparison of the measurement results with limits from existing relevant standards.

The frequency range under consideration is from 9 kHz to 18 GHz.

Dealing with biological effects on living matter is excluded from this document.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CISPR 16-1-1, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus*

CISPR 16-1-2, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-2: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Conducted disturbances*

CISPR 16-1-4, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-4: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Radiated disturbances*

CISPR 16-2-1, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-1: Methods of measurement of disturbances and immunity – Conducted disturbance measurements*

CISPR 16-2-3, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-3: Methods of measurement of disturbances and immunity – Radiated disturbance measurements*

NOTE See also the Bibliography

3 Terms and definitions

For the purposes of this document, the terms and definitions contained in IEC 60050-161 as well as the following terms and definitions apply.

NOTE See particularly electromagnetic disturbance (IEV 161-01-05) and electromagnetic interference (IEV 161-01-06).

3.1 boundary

for physically large equipment: imaginary straight line periphery describing a simple geometric configuration encompassing the equipment or system under consideration. All interconnecting cables inside the physically large equipment should be included within this boundary

3.2 antenna reference point

the reference point referred to in the antenna calibration procedure, which is used to determine the measurement distance between the equipment under test and the antenna

3.3 characterised interference

interference with an origin from an identified electromagnetic phenomenon, and for which the disturbance level at a given point is characterised by a collection of technical data, for example the spectrum

3.4 deviation from intended use regarding EMC

installation and/or operation of a device, equipment or system, deviating from the instructions of the manufacturer given in the user's manual

NOTE The installation refers to both the defined environment and electrical conditions including cabling.

3.5 distribution point

point on a data and communication network inside a system or an installation, electrically nearest to a particular communication equipment or terminal, at which other equipment or terminals are, or could be, connected

3.6 in-plant point of coupling IPC

point on a network inside a system or an installation, electrically nearest to a particular load, at which other loads are, or could be, connected

NOTE The IPC is usually the point for which electromagnetic compatibility is to be considered.

[IEC 61000-2-4, definition 3.1.7]

3.7

point of common coupling

PCC

point on a public power supply network, electrically nearest to a particular load, at which other loads are, or could be, connected

[IEC 61000-2-4, definition 3.1.6]

3.8

reference point (for *in situ* measurement)

point at which *in situ* measurement is performed

NOTE 1 In case of radiated measurements, it is measured along a perpendicular line from the boundary to the antenna reference point.

NOTE 2 Different reference points might be defined according to the frequency range.

NOTE 3 The boundary to be taken into account for measurement depends on the actual *in situ* conditions

3.9

physically large equipment

a group of items of equipment functionally connected to form a commercially specified physically large equipment considered in a defined context as a whole and separated from their environment

NOTE 1 An equipment can be considered as physically large when it has a total dimension exceeding that which is practical for testing on a conventional 10 m test site.

NOTE 2 The physically large equipment is considered to be separated from the environment and from the other external systems by an imaginary surface, which cuts the links between them and the physically large equipment.

NOTE 3 For the purpose of this document, the elements of the physically large equipment are objects such as devices, items of equipment or sub-systems. They are interrelated for achieving an objective which is the performance of a function or a set of functions.

3.10

victim equipment

interfered equipment having caused a complaint

3.11

equipment under test

EUT

the equipment (devices, appliances and systems) subjected to tests

4 Methodology

4.1 Structure of each measurement

The investigated EUT shall be checked and measured at each type of port for which EMC requirements are defined. In case of interference complaints this may be restricted to those ports which cause the interference situation. Each measurement may be separated according to the following steps.

- A preliminary measurement of the investigated port is carried out to detect the frequencies with the highest emissions by a measurement method which may deviate from the measurement method on the standardized test site as described in the relevant part of CISPR 16-2.
- Frequently appearing operating modes of the EUT have to be checked in order to find the mode with the highest disturbance emission (see 4.3).
- For each investigation the reference point has to be selected at the EUT and has to be used for the final measurements (see also 4.3).

- The measurement quantity has to be identified under environmental conditions for the final measurement. This value may have to be transferred to the standard conditions if necessary. In case of interference complaint, the value of the measurement quantity needs only be determined in the direction in which compatibility is required. This value may have to be transferred to the standard conditions if necessary.

4.2 Preliminary measurements and selection of measurement method

It is useful to apply different approaches for the detection of the frequencies with the highest emissions. One approach could be to check the technical documentation of the EUT with respect to such emissions; another approach could involve checking the highest emission at a closer distance to the EUT than that used for the final measurements.

The measurement method depends on the frequency range and EUT port under consideration.

Radiated emissions should be assessed by measurements of the electromagnetic field strength only, see CISPR 16-2-3.

Four measurement procedures are taken into account for telecommunication ports and AC mains ports as follows:


- measurement with the voltage probe according to CISPR 16-1-2;
- measurement with the capacitive voltage probe (CVP) according to CISPR 16-1-2;
- measurement with the current probe according to CISPR 16-1-2;
- measurement with a high impedance voltage probe via an *in-situ* produced capacity for the measurement of the asymmetrical voltage according to CISPR 16-1-2.

4.3 Selection of the EUT mode of operation and the reference point depending on the environment

CISPR 16-2-3 requires the mode with the highest emission for the measurements. If it is possible to select this mode from different modes, this shall be done.

<https://standards.iteh.ai/catalog/standards/iec/79d1500-2173-47db-85c4-f4862c708a6f/cispr-tr-16-2-5-2008>

The selection of the reference point for the measurements is different for the ports and depends on the environments. Figure 1 shows the different approaches.

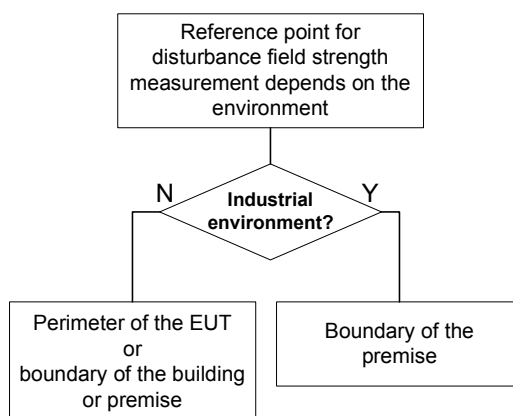

IEC 1188/08

NOTE It is recommended to choose the appropriate requirements (for example limits to be met) with respect to the characteristics of the interference victim.

Figure 1 – Enclosure port