



# SLOVENSKI STANDARD

## SIST ISO 7091:1996

01-april-1996

---

### Okrogle ravne podložke - Standardna vrsta - Razred izdelave C

Plain washers -- Normal series -- Product grade C

Rondelles plates -- Série normale -- Grade C

Ta slovenski standard je istoveten z: **ISO 7091:1983**

[SIST ISO 7091:1996](https://standards.iteh.ai/catalog/standards/sist/4a0482b5-abb0-49bd-af6f-d82292034f0b/sist-iso-7091-1996)

<https://standards.iteh.ai/catalog/standards/sist/4a0482b5-abb0-49bd-af6f-d82292034f0b/sist-iso-7091-1996>

#### **ICS:**

21.060.30 Podložke, varovalni elementi Washers, locking elements

**SIST ISO 7091:1996**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7091:1996

<https://standards.iteh.ai/catalog/standards/sist/4a0482b5-abb0-49bd-af6f-d82292034f0b/sist-iso-7091-1996>

# International Standard



# 7091

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

## Plain washers — Normal series — Product grade C

*Rondelles plates — Série normale — Grade C*

First edition — 1983-09-01

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7091:1996

<https://standards.iteh.ai/catalog/standards/sist/4a0482b5-abbc-49bd-af6f-d82292034f0b/sist-iso-7091-1996>

UDC 621.882.4

Ref. No. ISO 7091-1983 (E)

Descriptors : washers, plain washers, dimensions.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7091 was developed by Technical Committee ISO/TC 2, *Fasteners*, and was circulated to the member bodies in December 1981.

It has been approved by the member bodies of the following countries:

Australia	Hungary	Norway
Austria	India	Poland
Belgium	Ireland	Romania
China	Italy	South Africa, Rep. of
Czechoslovakia	Japan	Spain
Denmark	Korea, Dem. P. Rep. of	Sweden
Egypt, Arab Rep. of	Korea, Rep. of	Switzerland
Finland	Mexico	United Kingdom
France	Netherlands	USSR
Germany, F.R.	New Zealand	

The member bodies of the following countries expressed disapproval of the document on technical grounds:

Canada  
USA

# Plain washers — Normal series — Product grade C

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

## 1 Scope and field of application

This International Standard lays down the specification for plain washers of product grade C, preferable for hexagon bolts, screws and nuts of product grades C with normal width across flats according to ISO 272, with thread sizes from M 5 to M 36 inclusive.

When soft material pieces are tightened, or large clearance holes are used, the user shall check the technical suitability of this standard washer.

## 2 References

ISO 272, *Fasteners — Hexagon products — Widths across flats.*

ISO 887, *Plain washers for metric bolts, screws and nuts — General plan.*

ISO 1456, *Metallic coatings — Electroplated coatings of nickel plus chromium.*

ISO 1457, *Metallic coatings — Electroplated coatings of copper plus nickel plus chromium on iron or steel.*

ISO 1458, *Metallic coatings — Electroplated coatings of nickel.*

ISO 1461, *Metallic coatings — Hot dip galvanized coatings on fabricated ferrous products — Requirements.*

ISO 2081, *Metallic coatings — Electroplated coatings of zinc on iron or steel.*<sup>1)</sup>

ISO 3269, *Fasteners — Acceptance inspection.*<sup>2)</sup>


ISO 4759/3, *Tolerances for fasteners — Part 3: Washers for metric bolts, screws and nuts with thread diameters from 1 up to and including 150 mm — Product grades A and C.*

1) At present at the stage of draft. (Revision of ISO 2081-1973.)

2) At present at the stage of draft.

## ISO 7091-1983 (E)

## 3 Dimensions

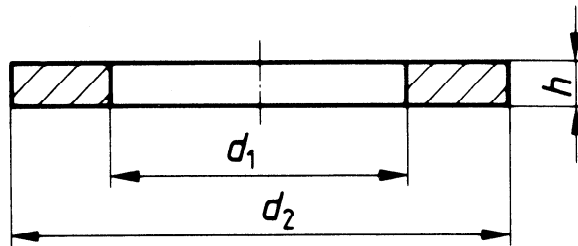

Dimensions in millimetres

Nominal size (Thread size, $d$ )	Clearance hole $d_1$		Outside diameter $d_2$		Thickness $h$		
	nom. (min.)	max.	nom. (max.)	min.	nom.	max.	min.
5	5,5	5,8	10	9,1	1	1,2	0,8
6	6,6	6,96	12	10,9	1,6	1,9	1,3
8	9	9,36	16	14,9	1,6	1,9	1,3
10	11	11,43	20	18,7	2	2,3	1,7
12	13,5	13,93	24	22,7	2,5	2,8	2,2
14	15,5	15,93	28	26,7	2,5	2,8	2,2
16	17,5	17,93	30	28,7	3	3,6	2,4
20	22	22,52	37	35,4	3	3,6	2,4
24	26	26,52	44	42,4	4	4,6	3,4
30	33	33,62	56	54,1	4	4,6	3,4
36	39	40	66	64,1	5	6	4

SIST ISO 7091:1996

<https://standards.itech.ai/catalog/standards/sist/4a0482b5-abb6-49bd-af6f-d82292034f0b/sist-iso-7091-1996>

## 4 Specifications and reference International Standards

Material		Steel
Mechanical properties	Class	100 HV
	International Standard	1)
	Hardness HV	100 min.
Tolerances	Product grade	C
	International Standard	ISO 4759/3
Surface finish		Plain Requirements for electroplating are given in ISO 1456, ISO 1457, ISO 1458, and ISO 2081. If different electroplating requirements are needed for other finishes, they should be negotiated between customer and supplier. For hot dip galvanizing, see ISO 1461.
Acceptability		The acceptance procedure is covered in ISO 3269.

1) Will be covered in a future International Standard.

## 5 Designation

Example for the designation of a plain washer, normal series, of nominal size 8 mm and mechanical property class 100 HV:

Washer ISO 7091 - 8 - 100 HV

## Annex

(This annex does not form part of the standard.)

Dimensions for nominal sizes 10, 12 and 14 mm are shown for hexagon products with width across flats as mentioned in the annex to the relevant product standards.

A transitional period is anticipated in which there will be some use of washers with dimensions shown in light type. The information is included to assist during the transitional period.

Dimensions in millimetres

Thread size (Nominal thread diameter, $d$ )	Width across flats $s$	Clearance hole $d_1$		Outside diameter $d_2$		Thickness $h$		
		nom. (min.)	max.	nom. (max.)	min.	nom.	max.	min.
10	15	11	11,43	19	17,7	2	2,3	1,7
	16	11	11,43	20	18,7	2	2,3	1,7
	17	11	11,43	21	19,7	2	2,3	1,7
12	18	13,5	13,93	24	22,7	2,5	2,8	2,2
	19							
14	21	15,5	15,93	28	26,7	2,5	2,8	2,2
	22							

NOTE — The figures in bold type are laid down in this International Standard.

SIST ISO 7091:1996

<https://standards.iteh.ai/catalog/standards/sist/4a0482b5-abb5-49bd-af6f-d82292034f0b/sist-iso-7091-1996>