

---

**Fotografija - Projekcija v zaprtih prostorih - 1. del: Preskus zaslonske osvetljenosti za projektorje mirujočih slik**

Photography - Projection in indoor rooms - Part 1: Screen illumination test for still projectors

**iTeh STANDARD PREVIEW**

Photographie - Projection en salles - Partie 1: Essai de luminosité de l'écran pour projecteurs fixes

[SIST ISO 11315-1:2003](https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72667a8fb/sist-iso-11315-1-2003)

**Ta slovenski standard je istoveten z: ISO 11315-1:1997**

**ICS:**

37.040.10	Fotografska oprema. Projektorji	Photographic equipment. Projectors
-----------	------------------------------------	---------------------------------------

**SIST ISO 11315-1:2003****en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 11315-1:2003

<https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003>

# INTERNATIONAL STANDARD

**ISO**  
**11315-1**

First edition  
1997-11-15

---

---

## Photography — Projection in indoor rooms —

### Part 1: Screen illumination test for still projectors

**iTeh STANDARD PREVIEW**  
*Photographie — Projection en salles —*  
*Partie 1: Essai de luminosité de l'écran pour projecteurs fixes*  
**(standards.iteh.ai)**

[SIST ISO 11315-1:2003](https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003>



Reference number  
ISO 11315-1:1997(E)

## ISO 11315-1:1997(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 11315-1 was prepared by Technical Committee ISO/TC 42, *Photography*.

It cancels and replaces ISO 8341:1989, of which it constitutes a technical revision.

ISO 11315 consists of the following parts, under the general title *Photography — Projection in indoor rooms*:

- *Part 1: Screen illumination test for still projectors*
- *Part 2: Screen luminance test for still and video projection*
- *Part 3: Projection reflecting screens*
- *Part 4: Reflecting projection screens — Classification and measurement of reflected screen luminance levels and sound attenuation*

Annexes A and B of this part of ISO 11315 are for information only.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet central@iso.ch  
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

# Photography — Projection in indoor rooms —

## Part 1:

### Screen illumination test for still projectors

#### 1 Scope

This part of ISO 11315 specifies a laboratory measuring method for determining the utilised flux of the projector and the uniformity of screen illuminance in darkened projection rooms for all types of purely optical still projection.

A standardized uniform light-measuring system allows comparison of screen illuminance values for different projection systems used alternately in practical use.

<https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003>

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 11315. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 11315 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

CIE No. 15.2:1986, *Colorimetry* (2nd edition).

CIE No. 17.4:1987, *International Lighting Vocabulary* [Same edition as IEC 50(845): *International Electrotechnical Vocabulary*, Chapter 845: *Lighting*.]

CIE No. 18.2:1983, *The Basis of Physical Photometry*.

CIE No. 69:1987, *Methods of Characterizing Illuminance Meters and Luminance Meters - Performance, Characteristics and Specifications*.

### 3 Definitions

For the purposes of this part of ISO 11315, the following definitions apply.

**3.1 illumination:** The application of visible radiation (light) to an object.  
[CIE-Publ. No. 17]

**3.2 luminous flux; light output:** The quantity derived from radiant flux by evaluating the radiation according to its action upon a selective receptor, the spectral sensitivity of which is defined by the standard spectral luminous efficiencies.  
[CIE-Publ. No. 17]

**3.3 utilised flux:** The luminous flux received on one side of the reference surface.  
[CIE-Publ. No. 17]

**3.4 still projection:** All projection methods with one or more projectors for slides, overhead-projection transparencies, episcopic pictures for projection and transparent LCDs.

**3.5 dark-room projection:** An indoor room without any additional room lighting, except safety-lights for steps, emergency exits, etc.

**3.6 uniformity ratio,  $g_2$ :** The ratio of the lowest measured illuminance/luminance to the highest measured illuminance/luminance, e.g.  $E_{\min}/E_{\max}$  (x 100 in %).  
[CIE-Publ. No. 17]

SIST ISO 11315-1:2003  
<https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003>

## 4 Preparation for photometric measurements

### 4.1 Preconditioning

Before the commencement of any test, the projector shall be conditioned by being kept under the environmental conditions of the testing laboratory for at least 8 h.

### 4.2 Projector set-up (light path)

While making the tests, the projector shall be operated with its normal components (e.g. light source, heat filter, condenser, lens), but without projection material (i.e. slides, films, etc. in the picture area or aperture plate).

### 4.3 Voltage, current and frequencies

**4.3.1** The projector shall be operated from an adjustable power supply adjusted to within  $\pm 0,5$  % of the rated voltage of the projector.

While adjusting the supply for tungsten lighting or non-controllable discharge lamps, the voltage shall be measured at the supply socket to which the recommended power supply cord of the projector is connected. The frequency of the power supply shall match the manufacturer's rating for the projector.

For controllable xenon-discharge lamps, the current shall be the nominal value (according to the data of the lamp-manufacturer)  $\pm 0,5 \%$ . In the case of xenon discharge lamps with a relatively vast luminous flux, the measurement shall be made through a highlight film (approximately  $D = 0,1-0,15$  where  $D$  is the film thickness, in millimetres) and with half of the nominal current. The value of the nominal luminous flux shall be calculated from the above parameters.

**4.3.2** If the projector (equipped with tungsten lighting or non-controllable discharge lamps) is suitable for use at different voltages and/or frequencies, the measurements for determining the luminous flux shall be made either at each adjustable voltage  $\pm 0,5 \%$  and its related frequency, or at least at a selection of characteristic voltages and frequencies. When selecting the voltages and frequencies, consideration shall be given to the main usage of the projector in practice, and the conditions under which extreme differences of the test results might be expected. The measurements for determining the uniformity of screen illuminance can be made at any position of the voltage selector with the respective line voltage  $\pm 0,5 \%$  and the related frequency.

**4.3.3** For determining the input voltage of the tungsten lamp, the voltage at the lamp holder shall be measured with the lamp operating, and after the time specified in 4.8 has elapsed. (When a lamp is provided by a switching power supply, use a true r.m.s voltmeter.)

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

#### **4.4 Lamp adjustment**

The lamp shall be adjusted in the projector according to the operating instructions.

<https://standards.iteh.ai/catalog/standards/sist/f29de54d-7587-4fa0-b5ed-01b72669a8fb/sist-iso-11315-1-2003>

#### **4.5 Cleanliness**

The optical elements of the projector shall be free from dust and other contamination.

#### **4.6 Ambient temperature**

The ambient temperature in the testing laboratory shall be  $23 \text{ }^{\circ}\text{C} \pm 2 \text{ }^{\circ}\text{C}$ .

#### **4.7 Projector alignment**

The projector shall be positioned so that the projection of its optical axis is normal to the plane of the screen. (See annex A, note.)

#### **4.8 Stabilization**

If the lamp is fed via a transformer or a ballast resistance, the light measurements shall be started, at the earliest, 20 min after having switched on the lamp, running under normal test conditions. If the lamp is fed directly by the mains voltage, the measurements can be started after 5 min.

#### **4.9 Ambient light**

The illumination of the screen due to ambient light should not exceed 1 % of the screen illuminance due to illumination projected through the projector lens during the measurement. For the reduction of stray light, the use of a black screen is recommended.

## 5 Light-measuring equipment

### 5.1 General

The photometric properties of projectors are described by the luminous flux (see 6.4.2) and by its uniformity on the projection screen (see clause 7).

### 5.2 Photometer

The photometer used shall have a spectral response characteristic corresponding to the CIE 1931 Standard Colorimetric Observer as specified in CIE No. 15.2:1986 (E-1.3.1). (This response correlates with the colour sensation of the human eye.)

A physical receiver shall assess the illuminance in accordance with the spectral luminous efficiency for photopic vision  $V(\lambda)$  as specified in IEC 50(845):1987, term 845-01-22 or CIE Publ. No. 18. The illuminance shall comply with class B as specified in CIE-Publ. No. 69.

The effective diameters of the photo-electrical component shall be specified in the test results (see clause 8).

### 5.3 Use of light meter

The light-sensing element of the meter shall be positioned at the plane of the screen with a tolerance of + 20 mm and parallel to it so that it measures directly the incident projected light.

## 6 Measurement of useful luminous flux (light output)

**6.1** The useful luminous flux is calculated from the average screen illuminance and the respective projection area.

**6.2** The effective projection area (see figure 1)  $A = w \times h$

where


$A$  is the effective projection area, in square metres;  
 $w$  is the effective projection width, in metres;  
 $h$  is the effective projection height, in metres.

$A$  shall be confined by using a suitable mask positioned in the picture area and brought to focus (e.g. an empty slide mount).

**6.3** For determining the average screen illuminance, the projected light shall be measured at nine points ( $E_1$  -  $E_2$  -  $E_3$  -  $E_4$  -  $E_5$  -  $E_6$  -  $E_7$  -  $E_8$  -  $E_9$ ) on the screen as shown in figure 1.

Do not deduct the unlighted corner areas (e.g. of an overhead projector) from the calculated area.

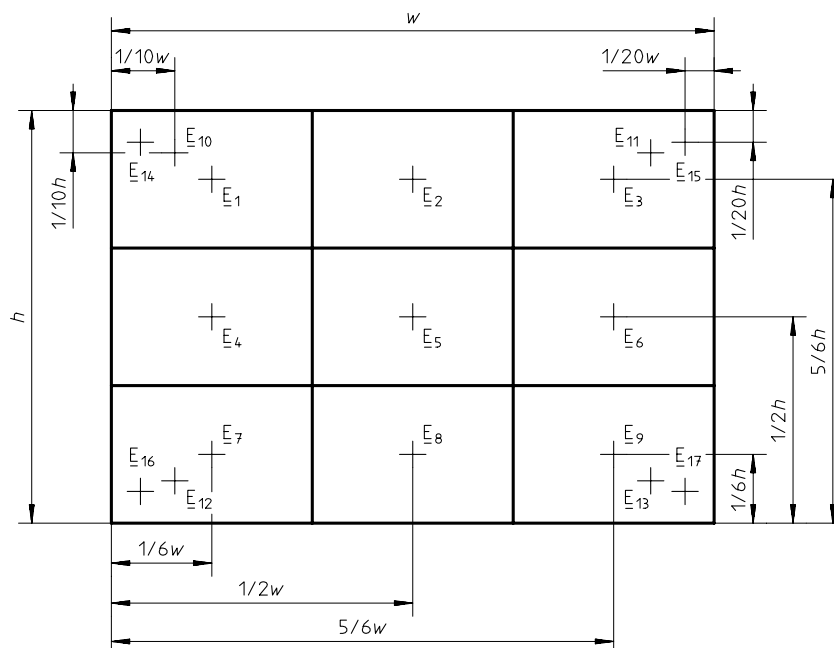

**Key**

- $w$  Effective projection width  
 $h$  Effective projection height

**Figure 1 - Screen illuminance measuring points on the screen**  
 (for the selection of test points, see 7.3)

SIST ISO 11315-1:2003

## 6.4 Calculating the useful luminous flux

**6.4.1** The arithmetical average of the nine readings ( $E_x$ ) of screen illuminance is given by  $\bar{E}$ , in lux:

$$\bar{E} = \frac{\sum_{x=1}^9 E_x}{9}$$

**6.4.2** To determine the effective luminous flux of a projector, the illumination is measured at a number of specified positions on the screen. A mean value (useful luminous flux) is calculated, which is then multiplied by the used area of the screen, in square metres.

The utilised luminous flux  $\Phi$  of the projector is given in lumens:

$$\Phi = \bar{E} \times A$$

where  $A$  is the effective projection area on the projection screen  $w \times h$  (see 6.2).

**6.4.3** The effective projection area  $A$  shall be in the range from 1 m<sup>2</sup> to 2 m<sup>2</sup>. In order to determine the projection area used for the test, the normal usage for which the projector is designed shall be noted.