

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital audio – Interface for non-linear PCM encoded audio bitstreams applying to IEC 60958 –
Part 7: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats**

Audionumérique – Interface pour les flux de bits audio à codage MIC non linéaire conformément à l'IEC 60958 –

Partie 7: Flux de bits MIC non linéaire selon les formats ATRAC, ATRAC2/3 et ATRAC-X



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

65 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital audio – Interface for non-linear PCM encoded audio bitstreams applying to IEC 60958 –
Part 7: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats**

Audionumérique – Interface pour les flux de bits audio à codage MIC non linéaire conformément à l'IEC 60958 –

Partie 7: Flux de bits MIC non linéaire selon les formats ATRAC, ATRAC2/3 et ATRAC-X

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.160.01

ISBN 978-2-8322-3415-0

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

REDLINE VERSION

VERSION REDLINE



**Digital audio – Interface for non-linear PCM encoded audio bitstreams applying to IEC 60958 –
Part 7: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats**

Audionumérique – Interface pour les flux de bits audio à codage MIC non linéaire conformément à l'IEC 60958 –

Partie 7: Flux de bits MIC non linéaire selon les formats ATRAC, ATRAC2/3 et ATRAC-X

CONTENTS

FOREWORD.....	3
INTRODUCTION to Amendment 1	5
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviations	6
3.1 Definitions	6
3.2 Abbreviations	6
4 Mapping of the audio bitstream on to IEC 61937	7
4.1 General.....	7
4.2 ATRAC, ATRAC2/3 and ATRAC-X burst-info	7
5 Format of ATRAC, ATRAC2/3 and ATRAC-X data-bursts.....	7
5.1 General.....	7
5.2 Audio data-bursts	7
5.2.1 The data ATRAC.....	7
5.2.2 Latency of ATRAC decoding.....	8
5.2.3 The data ATRAC2/3	9
5.2.4 Latency of ATRAC2/3 decoding.....	10
5.2.5 The data ATRAC-X	11
5.2.6 Latency of ATRAC-X decoding	12
Bibliography	14
Figure 1 – ATRAC data-burst	8
Figure 2 – Latency of ATRAC decoding	9
Figure 3 – ATRAC2/3 data-burst	9
Figure 4 – Latency of ATRAC2/3 decoding	10
Figure 5 – ATRAC-X data-burst.....	11
Figure 6 – Latency of ATRAC-X decoding.....	12
Table 1 – Fields of burst-info.....	7
Table 2 – Data-type-dependent information for data-type ATRAC.....	8
Table 3 – Data-type-dependent information for data-type ATRAC2/3.....	10
Table 4 – Data-type-dependent information for data-type ATRAC-X.....	11

<https://standards.iteh.ai/>
 Document Preview

IEC 61937-7:2004
<https://standards.iteh.ai/catalog/standards/iec/c739a450-43d2-44a6-8115-1c175de03f8b/iec-61937-7-2004>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**DIGITAL AUDIO –
INTERFACE FOR NON-LINEAR PCM ENCODED
AUDIO BITSTREAMS APPLYING IEC 60958 –**

**Part 7: Non-linear PCM bitstreams according to
the ATRAC, ATRAC2/3 and ATRAC-X formats**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 61937-7 edition 2.1 contains the second edition (2004-11) [documents 100/752/CDV and 100/834/RVC] and its amendment 1 (2016-05) [documents 100/2503/CDV and 100/2614/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 61937-7 has been prepared by Technical Area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This edition includes the following significant technical changes with respect to the previous edition:

- a) In this edition, a new audio data-type of ATRAC-X is added to ATRAC and ATRAC2/3.
- b) Specific properties such as reference points, repetition period, the method of filling stream gaps, and decoding latency are specified for data-type of ATRAC-X.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 61937 consists of the following parts, under the general title *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958*:

- Part 1: General
- Part 2: Burst-info
- Part 3: Non-linear PCM bitstreams according to the AC-3 format
- Part 4: Non-linear PCM bitstreams according to the MPEG audio formats
- Part 5: Non-linear PCM bitstreams according to the DTS (Digital Theater Systems) format(s)
- Part 6: Non-linear PCM bitstreams according to the MPEG-2 AAC format
- Part 7: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats (TA4)
- Part 8: Non-linear PCM bitstreams according to the Windows Media Audio Professional (TA4)¹

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

¹ Under consideration.

INTRODUCTION to Amendment 1

The revision of IEC 61937-7:2004 has become necessary to specify the new additional subdata-types of ATRAC-X low latency. This amendment includes the following technical changes:

- a) new three subdata-types of ATRAC-X low latency are defined;
- b) specific properties such as reference points, repetition period, and decoding latency are specified for each subdata-type of ATRAC-X.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[IEC 61937-7:2004](#)

<https://standards.iteh.ai/catalog/standards/iec/c739a450-43f2-44a6-8115-1c175de03f8b/iec-61937-7-2004>

DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED AUDIO BITSTREAMS APPLYING IEC 60958 –

Part 7: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats

1 Scope

This part of IEC 61937 specifies the method for the digital audio interface specified in IEC 60958 to convey non-linear PCM bitstreams encoded in accordance with the ATRAC, ATRAC2/3 and ATRAC-X formats.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60958-1, *Digital audio interface – Part 1: General*

IEC 60958-3, *Digital audio interface – Part 3: Consumer applications*

IEC 61937-1, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 1: General*

IEC 61937-2, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 2: Burst-info*

3 Terms, definitions and abbreviations

3.1 Definitions

For the purposes of this document, the definitions given in IEC 61937-1 and IEC 61937-2, as well as the following, apply.

3.1.1

latency

delay time of an external audio decoder to decode an ATRAC, ATRAC2/3 and ATRAC-X data-burst, defined as the sum of two values of the receiving delay time and the decoding delay time

3.2 Abbreviations

ATRAC	Adaptive TRansform Acoustic Coding
ATRAC2	Adaptive TRansform Acoustic Coding 2
ATRAC3	Adaptive TRansform Acoustic Coding 3
ATRAC2/3	ATRAC2 and/or ATRAC3
ATRAC-X	Adaptive TRansform Acoustic Coding-X

4 Mapping of the audio bitstream on to IEC 61937

4.1 General

The coding of the bitstream and data-burst shall be in accordance with IEC 61937-1 and IEC 61937-2.

4.2 ATRAC, ATRAC2/3 and ATRAC-X burst-info

This 16-bit burst-info shall contain data-burst information structured in accordance with Table 1.

Table 1 – Fields of burst-info

Bits of Pc	Value	Contents	Reference point R	Repetition period of data-burst in IEC 60958 frames
0-4	0-13	Data-type In accordance with IEC 61937-1 and IEC 61937-2		
	14	ATRAC	bit 0 of Pa	512
	15	ATRAC2/3	bit 0 of Pa	1 024
	16	ATRAC-X	Subdata-type dependent	Subdata-type dependent
	17-31	In accordance with IEC 61937-2		
5, 6	00 ₂	Reserved in ATRAC and ATRAC2/3 formats		
	00 ₂	Subdata-type for ATRAC-X	bit 0 of Pa	2 048
	01 ₂ , 10 ₂ , 11 ₂	Reserved for sub-data-type in ATRAC-X		
	01 ₂	Subdata-type for ATRAC-X low latency	bit 0 of Pa	512
	10 ₂	Subdata-type for ATRAC-X low latency	bit 0 of Pa	256
	11 ₂	Subdata-type for ATRAC-X low latency	bit 0 of Pa	128
7-15		In accordance with IEC 61937-1 and IEC 61937-2		

5 Format of ATRAC, ATRAC2/3 and ATRAC-X data-bursts

5.1 General

This clause specifies the audio data-bursts ATRAC, ATRAC2/3 and ATRAC-X. Specific properties such as reference points, repetition period, the method of filling stream gaps, and decoding latency are specified for each data-type of ATRAC, ATRAC2/3 and ATRAC-X.

The decoding latency (or delay), indicated for the data-types, shall be used by the transmitter to schedule data-bursts as necessary to establish synchronization between the picture and the decoded audio.

NOTE For ATRAC, ATRAC2/3 and ATRAC-X formats, the recommended repetition value period of pause data-bursts is 32 IEC 60958 frames.


5.2 Audio data-bursts

5.2.1 The data ATRAC

The ATRAC bitstream consists of sequences of ATRAC frames. The data-type of an ATRAC data-burst is 0Eh. The data-burst is headed with a burst-preamble, followed by the burst-payload, and is stuffed with stuffing bits (see Figure 1). The burst-payload of each data-burst

of ATRAC data shall contain one complete ATRAC frame, and represents 512 samples for each encoded channel. The length of the ATRAC data-burst depends on the encoded bit rate (which determines the ATRAC-frame length).

NOTE The reference to the specification for the ATRAC bitstream, representing 512 samples of encoded audio per frame, may be found in the bibliography.

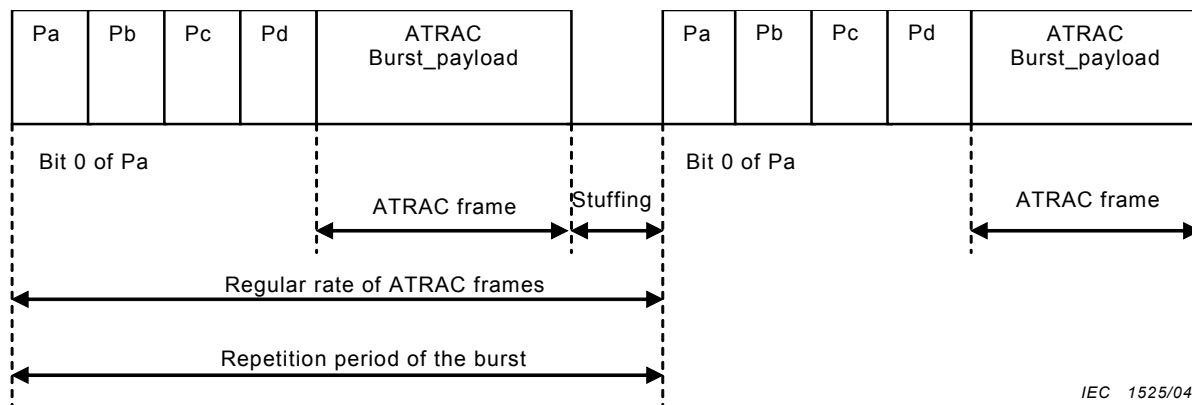

IEC 1525/04

Figure 1 – ATRAC data-burst

The data-type-dependent information for ATRAC is given in Table 2.

Table 2 – Data-type-dependent information for data-type ATRAC

Bits of Pc	Data type dependent, bit number	Contents
LSB..MSB	LSB..MSB	
8-12	00h – 1Fh	reserved, shall be set to '0'

The reference point of an ATRAC data-burst is bit 0 of Pa and shall occur exactly once every 512 sampling periods. The data-burst containing ATRAC frames shall occur at a regular rate, with the reference point of each ATRAC data-burst beginning 512 IEC 60958 frames after the reference point of the preceding ATRAC data-burst (of the same bit-stream-number).

NOTE 1 It is recommended that Pause data-bursts are used to fill stream gaps in the ATRAC bit stream as described in IEC 61937-1, and that Pause data-bursts be transmitted with a repetition period of 32 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream-gap length (which may not be a multiple of 32 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937-1).

When a stream gap in an ATRAC stream is filled by a sequence of Pause data-bursts, the Pa of the first Pause data-burst shall be located 512 sampling periods following the Pa of the previous ATRAC frame.

NOTE 2 It is recommended that the sequence(s) of Pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 32 IEC 60958 frame length of the Pause data-burst) the Pa of the first ATRAC data-burst which follows the stream gap.

The gap-length parameter contained in the Pause data-burst is intended to be interpreted by the ATRAC decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

5.2.2 Latency of ATRAC decoding

The latency of an external audio decoder to decode ATRAC is defined as the sum of the receiving delay time and the decoding delay time, as illustrated in Figure 2.

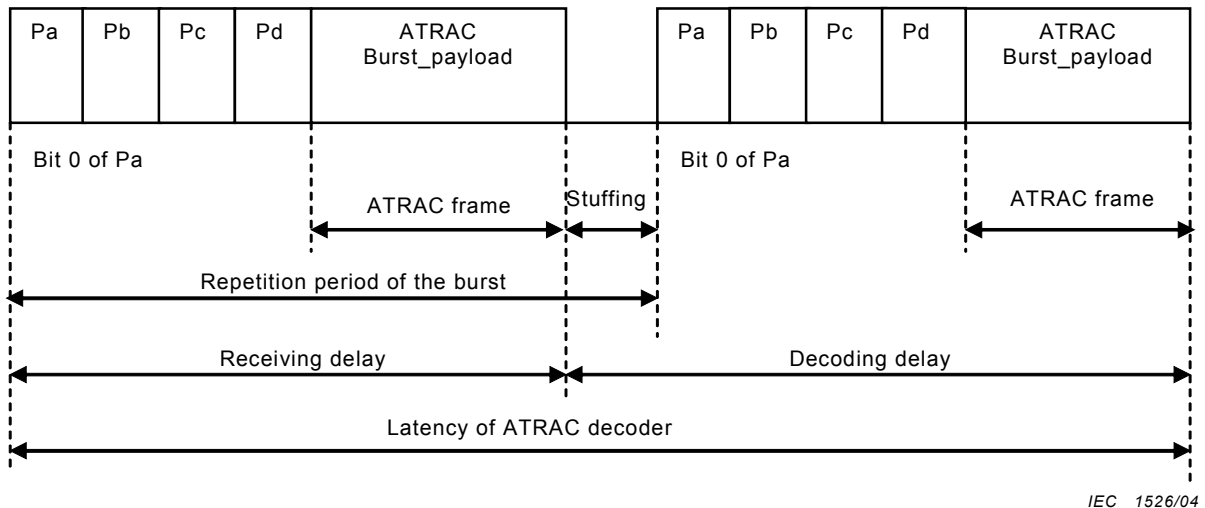


Figure 2 – Latency of ATRAC decoding

EXAMPLE The receiving delay time to receive a whole data-burst is calculated as follows. The length of preamble is 64 bits. If each ATRAC frame consists of 1 696 B (eight channels of 146,08 kbit/s per channel), the length of the whole data burst-payload is 13 568 bits. In this case, the whole length of the data burst is 13 632 bits. The receiving delay time is calculated as 9,66 ms with 44,1 kHz sampling frequency. The decoding delay time is calculated as 11,61 ms, and is equal to the decoding time for one ATRAC frame data. Hence, the latency of ATRAC decoding is approximately 21,27 ms in this case.

The absolute maximum decoding latency is taken when ATRAC burst-payload extends to just before the Pa of the next frame and is equal to 23,22 ms at 44,1 kHz sampling frequency.

5.2.3 The data ATRAC2/3

IEC 61937-7:2004

<https://standards.iteh.ai/catalog/standards/iec/c739a450-43d2-44a6-8115-1c175de03f8b/iec-61937-7-2004>

The ATRAC2/3 bitstream consists of sequences of ATRAC2/3 frames. The data-type of an ATRAC2/3 data-burst is 0Fh. The data-burst is headed with a burst-preamble, followed by the burst-payload, and stuffed with stuffing bits (see Figure 3). The burst-payload of each data-burst of ATRAC2/3 data shall contain one complete ATRAC2/3 frame, and represents 1 024 samples for each encoded channels. The length of the ATRAC2/3 data-burst depends on the encoded bit rate (which determines the ATRAC2/3-frame length).

NOTE The reference to the specification for the ATRAC2/3 bitstream, representing 1 024 samples of encoded audio per frame, may be found in the bibliography.

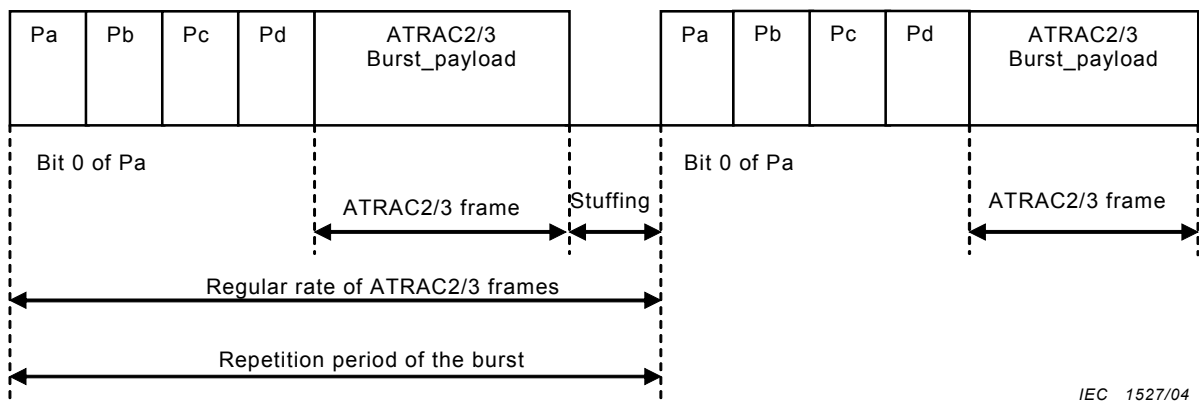


Figure 3 – ATRAC2/3 data-burst

The data-type-dependent information for ATRAC2/3 is given in Table 3.

Table 3 – Data-type-dependent information for data-type ATRAC2/3

Bits of Pc LSB..MSB	Data type dependent bit number LSB..MSB	Contents
8-12	00h 01h 02h-1Fh	ATRAC2 ATRAC3 reserved, shall be set to '0'

The reference point of an ATRAC2/3 data-burst is bit 0 of Pa and shall occur exactly once every 1 024 sampling periods. The data-burst containing ATRAC2/3 frames shall occur at a regular rate, with the reference point of each ATRAC2/3 data-burst beginning 1 024 IEC 60958 frames after the reference point of the preceding ATRAC2/3 data-burst (of the same bit-stream-number).

NOTE 1 It is recommended that Pause data-bursts are used to fill stream gaps in the ATRAC2/3 bit stream as described in IEC 61937-1, and that Pause data-bursts be transmitted with a repetition period of 32 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream-gap length (which may not be a multiple of 32 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937-1).

When a stream gap in an ATRAC2/3 stream is filled by a sequence of Pause data-bursts, the Pa of the first Pause data-burst shall be located 1 024 sampling periods following the Pa of the previous ATRAC2/3 frame.

NOTE 2 It is recommended that the sequence(s) of Pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 32 IEC 60958 frame length of the Pause data-burst) the Pa of the first ATRAC2/3 data-burst which follows the stream gap.

The gap-length parameter contained in the Pause data-burst is intended to be interpreted by the ATRAC2/3 decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

5.2.4 Latency of ATRAC2/3 decoding

The latency of an external audio decoder to decode ATRAC2/3 is defined as the sum of the receiving delay time and the decoding delay time (see Figure 4).

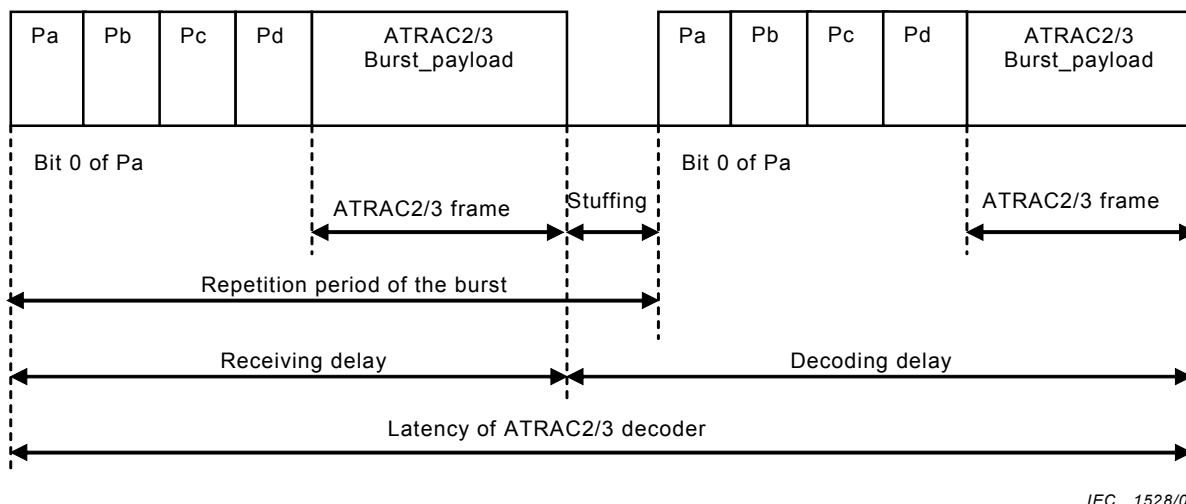


Figure 4 – Latency of ATRAC2/3 decoding

EXAMPLE The receiving delay time to receive a whole data-burst is calculated as follows. The length of preamble is 64 bits. If, for example, each ATRAC2/3 frame consists of 1 696 B (Eight channels of 73,04 kbit/s per channel), the length of the whole data burst-payload is 13