

International Standard



7129

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Earth-moving machinery — Tractors with dozer, graders, tractor scrapers — Cutting edges — Principal shapes and basic dimensions

Engins de terrassement — Tracteurs à lame, niveleuses, décapeuses — Bords coupants — Formes principales et dimensions de base

iTeh STANDARD PREVIEW

First edition — 1982-08-15

(standards.iteh.ai)

ISO 7129:1982

<https://standards.iteh.ai/catalog/standards/sist/1daf7943-dae7-457a-a6d3-bdb949f6f9e8/iso-7129-1982>

UDC 621.879

Ref. No. ISO 7129-1982 (E)

Descriptors : earth handling equipment, tractors, graders, scrapers, accessories, cutting tools, dimensions, dimensional tolerances, interchangeability.

Price based on 11 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7129 was developed by Technical Committee ISO/TC 127, *Earth-moving machinery*, and was circulated to the member bodies in June 1981.

ITeH STANDARD REVIEW
(standards.iteh.ai)

It has been approved by the member bodies of the following countries :

Australia
Austria
Belgium
Czechoslovakia
Egypt, Arab Rep. of
Finland

France
Ireland
Italy
Japan
Poland
Romania

ISO 7129:1982

South Africa, Rep. of
Sweden
United Kingdom
USA
USSR

<https://standards.iteh.ai/catalog/standards/sist/7da17943-dae7-457a-a6d3-bdb949f6f228/iso-7129-1982>

The member body of the following country expressed disapproval of the document on technical grounds:

Germany, F.R.

Earth-moving machinery — Tractors with dozer, graders, tractor scrapers — Cutting edges — Principal shapes and basic dimensions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

1 Scope and field of application

This International Standard specifies the

[ISO 7129:1982](#)

<https://standards.iteh.ai/catalog/standards/sist/1daf7943-dae7-457a-a6d3-0ae94969ec04/iso-7129-1982>

- principal shapes and dimensions of the cross-section,
- hole location for the mounting bolts,
- shapes and dimensions of holes for the mounting bolts,

for cutting edges used on tractors with dozer, graders and tractor scrapers, as defined in ISO 6165, taking into consideration the interchangeability.

NOTE — Some inch figures in this International Standard are not equivalent to the corresponding millimetre figures because values which are widely used have been adopted.

2 Reference

ISO 6165, *Earth-moving machinery — Basic types — Vocabulary*.


3 Cutting edges — Cross-sections — Principal shapes and basic dimensions

3.1 Principal shapes

The principal shapes of the cutting edge cross-section shall be as in tables 1 and 2.

Table 1 — Tractor with dozer and tractor scraper

Dimensions in millimetres
Inch values in parentheses

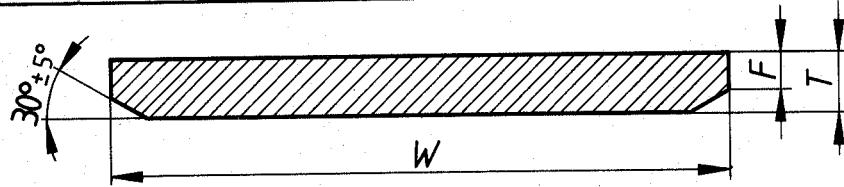


Application *		Width <i>W</i>		Thickness <i>T</i>		Tip of chamfer <i>F</i>	
Tractor with dozer	Tractor scraper	Basic dimensions	Tolerances	Basic dimensions	Tolerances	max.	min.
x		153 (6)	± 3,0 (± 0.118)	12,7 (0.500)		8 (0.32)	
x		153 (6)		16,0 (0.625)		10 (0.39)	
x		153 (6)		19,0 (0.750)		12 (0.47)	
x		165 (6.5)		16,0 (0.625)		10 (0.39)	
x		204 (8)		16,0 (0.625)		10 (0.39)	
x		204 (8)		19,0 (0.750)		12 (0.47)	
x		204 (8)		22,0 (0.875)		13 (0.51)	
x		204 (8)		25,4 (1.000)		14 (0.55)	
x	x	254 (10)		19,0 (0.750)		12 (0.47)	
	x	254 (10)		22,0 (0.875)		13 (0.51)	
x	x	254 (10)		25,4 (1.000)		14 (0.55)	
x		254 (10)		32,0 (1.250)		20 (0.79)	
x		254 (10)		41,0 (1.625)		25 (0.98)	
	x	305 (12)	19,0 (0.750)	12 (0.47)			
	x	305 (12)	22,0 (0.875)	13 (0.51)			
x		305 (12)	25,4 (1.000)	14 (0.55)			
x		305 (12)	28,6 (1.125)	18 (0.71)			
x		305 (12)	32,0 (1.250)	20 (0.79)			
	x	305 (12)	38,0 (1.500)	23 (0.91)			
	x	330 (13)	19,0 (0.750)	12 (0.47)			
	x	330 (13)	22,0 (0.875)	13 (0.51)			
	x	330 (13)	25,4 (1.000)	14 (0.55)			
	x	330 (13)	28,6 (1.125)	18 (0.71)			
x		330 (13)	32,0 (1.250)	20 (0.79)			
x		330 (13)	35,0 (1.375)	21 (0.83)			
	x	330 (13)	38,0 (1.500)	23 (0.91)			
	x	330 (13)	41,0 (1.625)	25 (0.98)			
	x	330 (13)	44,5 (1.750)	27 (1.06)			
	x	360 (14)	19,0 (0.750)	12 (0.47)			
	x	360 (14)	22,0 (0.875)	13 (0.51)			
	x	360 (14)	25,4 (1.000)	14 (0.55)			
x		360 (14)	28,6 (1.125)	18 (0.71)			
x		360 (14)	32,0 (1.250)	20 (0.79)			
x		360 (14)	35,0 (1.375)	21 (0.83)			
	x	406 (16)	22,0 (0.875)	13 (0.51)			
	x	406 (16)	25,4 (1.000)	14 (0.55)			
	x	406 (16)	28,6 (1.125)	18 (0.71)			
	x	406 (16)	32,0 (1.250)	20 (0.79)			
	x	406 (16)	35,0 (1.375)	21 (0.83)			
x		406 (16)	38,0 (1.500)	23 (0.91)			
x		406 (16)	41,0 (1.625)	25 (0.98)			
x		406 (16)	44,5 (1.750)	27 (1.06)			
	x	482 (19)	28,6 (1.125)	18 (0.71)			
	x	482 (19)	32,0 (1.250)	20 (0.79)			
	x	482 (19)	35,0 (1.375)	21 (0.83)			
	x	482 (19)	38,0 (1.500)	23 (0.91)			
	x	482 (19)	41,0 (1.625)	25 (0.98)			
	x	482 (19)	44,5 (1.750)	27 (1.06)			

* Recommendation only.

NOTE — The shapes and dimension of cutting edges with a 140 mm hole pitch are specified in the annex.

Table 2 — Grader

Dimensions in millimetres
Inch values in parentheses

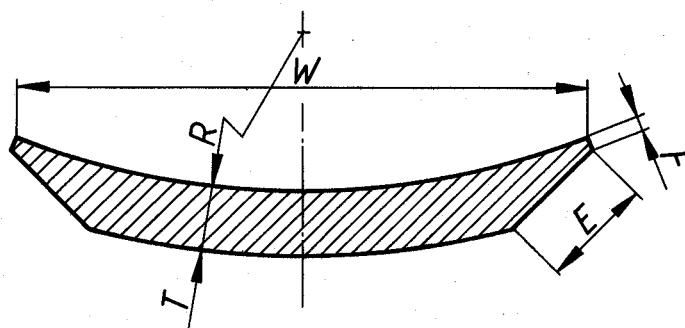

Width		Thickness		Radius of curvature		Chamfer	
W		T		R			
Basic dimensions	Tolerances	Basic dimensions	Tolerances	Basic dimensions	Tolerances	E	F (min.)
152 (6)		13 (0.500)					
152 (6)	+ 3,0 - 1,5	16 (0.625)					
152 (6)	$\left(\begin{array}{l} + 0.118 \\ - 0.059 \end{array} \right)$	19 (0.750)	$\pm 0,6$ (± 0.025)	280 (11)	± 10 (± 0.394)	30 (1.18)	2,5 (0.1)
204 (8)		16 (0.625)					
204 (8)		19 (0.750)					

NOTE — The shapes and dimensions of cutting edges with 140 and 280 mm hole pitches are specified in the annex.

<https://standards.iteh.ai/catalog/standards/sist/1daf7943-dae7-457a-a6d3-bdb949f6f9e8/iso-7129-1982>

4 Mounting bolts — Hole location

- 4.1 The hole location for the mounting bolts shall be those presented in tables 3 and 4.
- 4.2 Each countersink shall be located within a 3,2 mm (0.125 in) diameter true position circle.
- 4.3 The camber of cutting edge shall be within 2 mm/m (0.08 in/39.4 in).

Table 3 — Tractor with dozer and tractor scraper


Dimensions in millimetres
Inch values in parentheses

Width W	Hole location
330 and less	<p>Each hole $\phi 3,2 (0,125)$</p> <p>— $\frac{2}{1\,000} (0,08/39,4)$</p> <p>Centre line of row of holes</p> <p>76,2⁰₋₃ (3,0⁰_{-0,118})</p> <p>152,4 (6,00)</p> <p>— $\frac{2}{1\,000} (0,08/39,4)$</p> <p>$\frac{W}{2}$</p> <p>$W$</p> <p>$\frac{W}{2}$</p>
330 and over	<p>Centre line of row of holes</p> <p>— $\frac{2}{1\,000} (0,08/39,4)$</p> <p>$\frac{W-76,2}{2} (\frac{W-3}{2})$</p> <p>$\frac{W}{2}$</p> <p>76,2 (3,0)</p> <p>W</p> <p>$\frac{W-76,2}{2} (\frac{W-3}{2})$</p> <p>76,2⁰₋₃ (3,0⁰_{-0,118})</p> <p>152,4 (6,00)</p> <p>— $\frac{2}{1\,000} (0,08/39,4)$</p> <p>— $\frac{2}{1\,000} (0,08/39,4)$</p> <p>Each hole $\phi 3,2 (0,125)$</p>

NOTE — The shapes and dimensions of cutting edges with a 140 mm hole pitch are specified in the annex.

Table 4 – Grader

Dimensions in millimetres
Inch values in parentheses

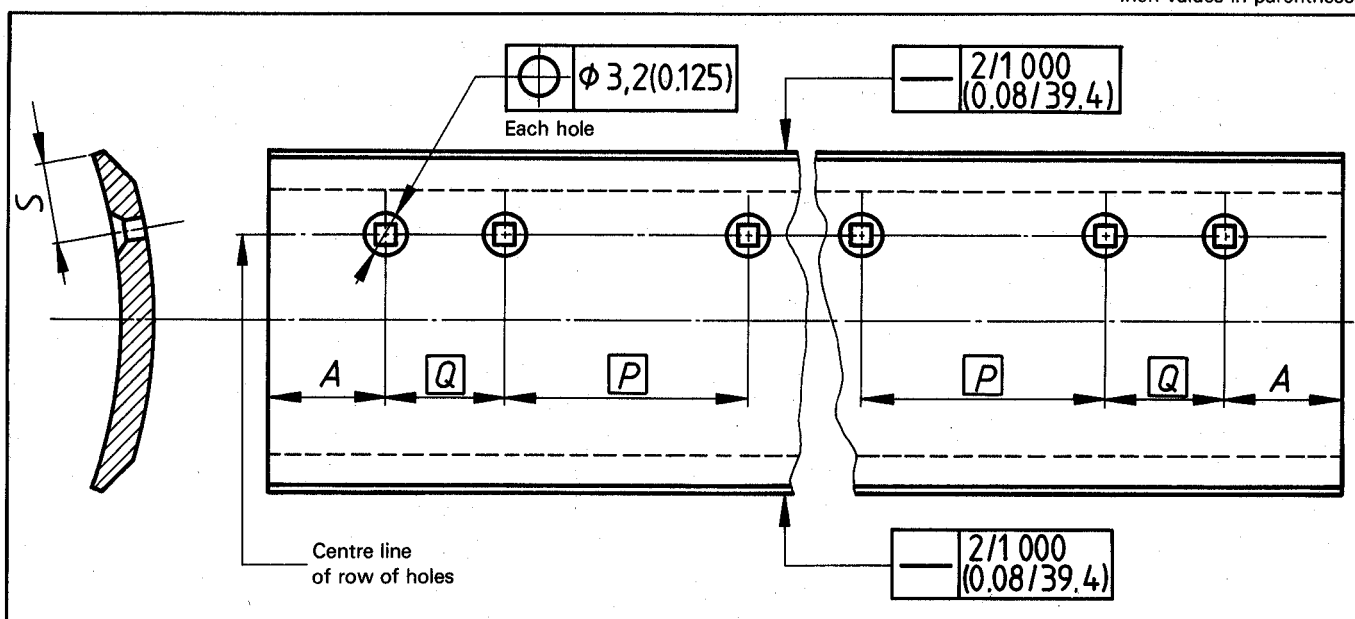

Pitch		Distance from the ends			
Centre portion	Both sides	A		S	
P	Q*	Basic dimensions	Tolerances	Basic dimensions	Tolerances
152,4 (6)	76,2 (3)	76,2 (3)	$0 \begin{pmatrix} 0 \\ -3 \\ -0.118 \end{pmatrix}$	42 (1.65)	$0 \begin{pmatrix} 0 \\ -2 \\ -0.079 \end{pmatrix}$
250 (10)	62,5 (2.5)	62,5 (2.5)			
304,8 (12)	76,2 (3)	76,2 (3)			

* Can be omitted for small machines.

NOTE – The shapes and dimensions of cutting edges with 140 and 280 mm hole pitches are specified in the annex.


5 Mounting bolt hole — Shapes and dimensions

5.1 The shape and dimension of the holes for the mounting bolts shall be those presented in table 5.

5.2 The inscribed circles of the square holes shall be concentric with the countersink to within 0,8 mm (0.032 in).

Table 5 — Mounting bolt hole

Dimensions in millimetres
Inch values in parentheses

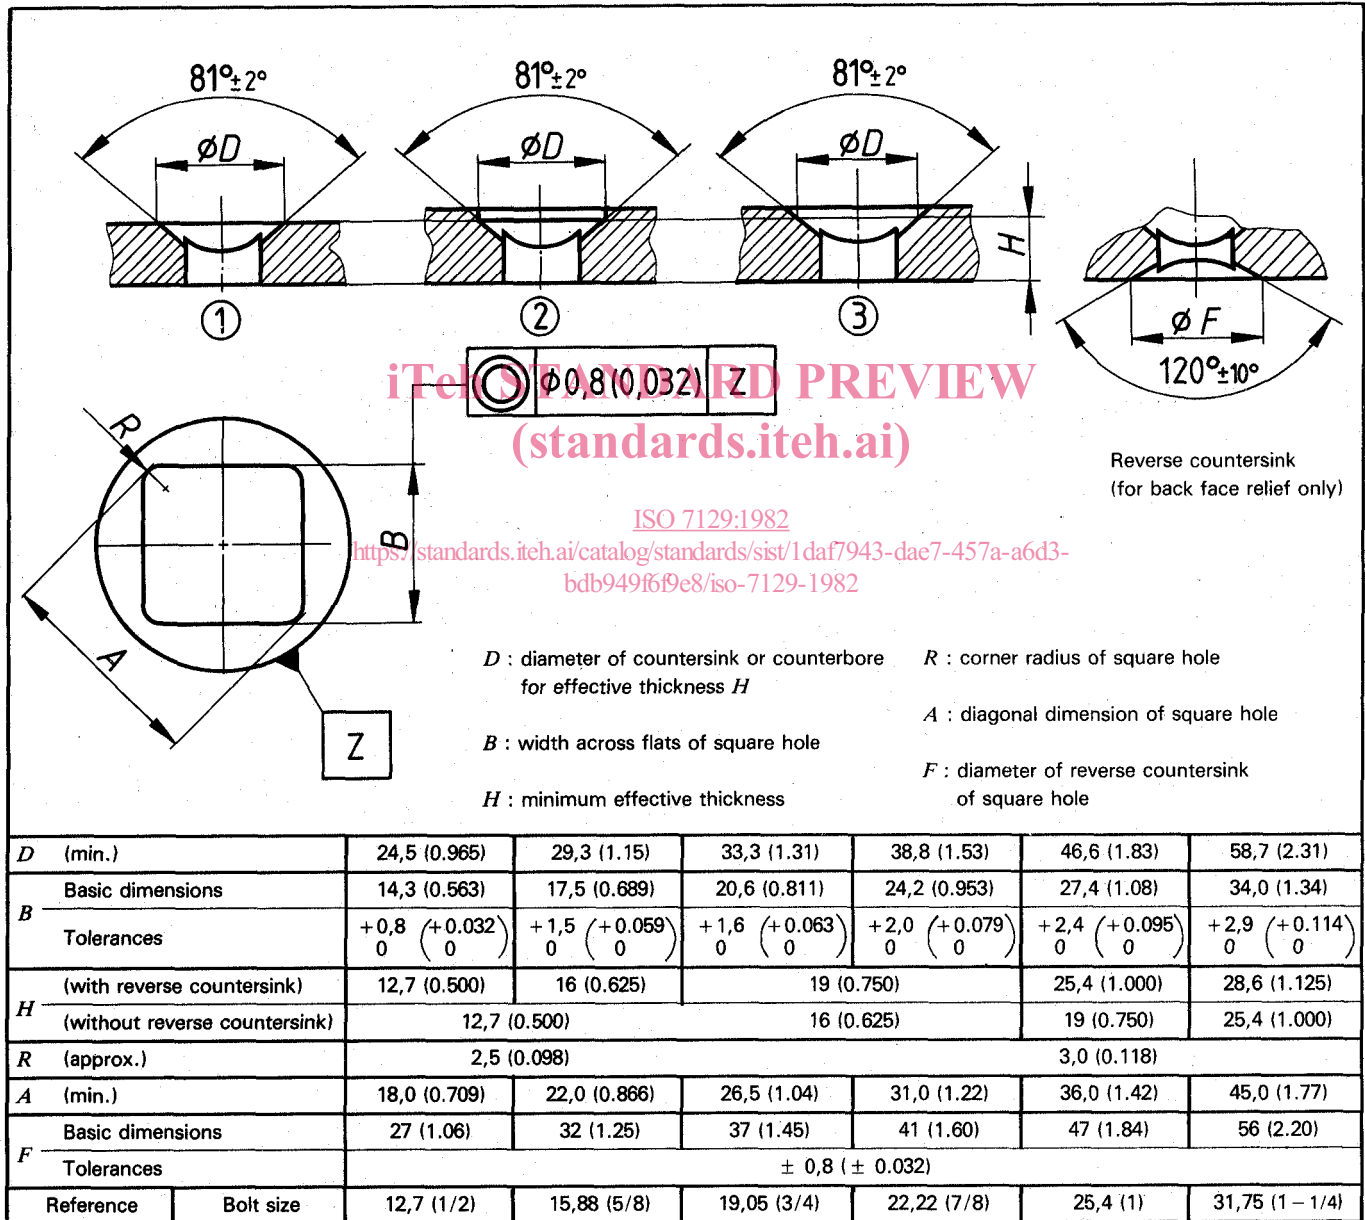

NOTE — The shapes and dimensions of mounting bolt hole with 140 and/or 280 mm hole pitches are specified in the annex.

Annex

Principal shapes and basic dimensions of cutting edges with 140 and 280 mm hole pitch

A.1 Field of application

This annex is applicable in those countries using 140 and 280 mm pitch for mounting bolts.

A.2 Cutting edges — Cross-sections — Principal shapes and basic dimensions

The principal shapes and basic dimensions of the cutting edge cross-section shall be as in tables 6 and 7.

Table 6 — Tractor with dozer and tractor scraper

Dimensions in millimetres

Width		Thickness		Tip of chamfer	
<i>W</i>		<i>T</i>		<i>F</i>	
Basic dimensions	Tolerances	Basic dimensions	Tolerances	max.	min.
150	+ 2,0 - 4,5	12	+ 1,0 - 2,0	8	4
150		16		10	
180		12		8	
180		16		10	
250		18	12		
300		18	12		
300		25	+ 1,5 - 2,5	16	
360		25		16	
400		25		16	
470		30		20	