



SLOVENSKI STANDARD
SIST EN 303 035-1 V1.2.1:2003
01-marec-2003

Df]nYa b]gbc dc j b]fUX]c`fH9HF5Ł!`< Ufa cb]n]fUb]`Yj fcdg_]`ghUbXUfX`fØBŁnU
cdfYa c`H9HF5ž_]nU`Ya UV]ghj YbY`nU hYj Y `YbU' "&X]fY_hj Yc`fUX]`g_]`]b
hY`Y_ca i b]_UW]`g_]`hYfa]bUg_]`cdfYa]`fF/ HH9Ł!`%`XY.`; c j cf`]b`dcXUh_]`fU Ž8Ł

Terrestrial Trunked Radio (TETRA) - Harmonized EN for TETRA equipment covering essential requirements under article 3.2 of the R&TTE Directive - Part 1: Voice plus Data (V+D)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 035-1 V1.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003)
<https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003>

Ta slovenski standard je istoveten z: EN 303 035-1 Version 1.2.1

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST EN 303 035-1 V1.2.1:2003 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 035-1 V1.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003>

ETSI EN 303 035-1 V1.2.1 (2001-12)

Candidate Harmonized European Standard (Telecommunications series)

**Terrestrial Trunked Radio (TETRA);
Harmonized EN for TETRA equipment covering essential
requirements under article 3.2 of the R&TTE Directive;
Part 1: Voice plus Data (V+D)**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 035-1 V1.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003>



Reference

REN/TETRA-02044-1

Keywords

radio, regulation, TETRA, V+D

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh **STANDARD PREVIEW**
(standards.iteh.ai)

SIST EN 303 035-1 V1.2.1:2003<https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	7
1 Scope	9
2 References	9
3 Definitions and abbreviations.....	11
3.1 Definitions	11
3.2 Abbreviations	12
4 Technical requirements specifications	14
4.1 Environmental profile.....	14
4.2 Conformance requirements	14
4.2.1 Requirements associated with frequency and channel allocation	15
4.2.2 Requirements associated with transmitting functions.....	16
4.2.3 Requirements associated with receiving functions	17
4.2.4 Requirements associated with control and monitoring functions	18
4.2.4.1 Requirements for the radio layer.....	18
4.2.4.2 Requirements for the lower MAC layer.....	19
4.2.4.3 Requirements for the upper MAC layer.....	19
4.2.4.4 Requirements for the LLC layer.....	22
4.2.4.5 Requirements for the MLE layer.....	23
4.2.4.6 Requirements for the MM layer.....	24
4.2.4.7 Requirements for the CMCE layer.....	25
5 Testing for compliance with technical requirements.....	28
5.1 Environmental conditions for testing.....	28
5.2 Interpretation of the measurement results.....	28
5.3 Essential radio test suites.....	30
5.3.1 Reference test specifications.....	30
5.3.2 Test configuration.....	30
5.3.3 Radio layer test specification.....	31
5.3.3.1 Radio layer test specification for BS, MS and DM-GATE	31
5.3.3.1.1 Test case index for radio layer for BS, MS and DM-GATE.....	31
5.3.3.1.2 Test case selection expression definitions for radio layer for BS, MS and DM-GATE	34
5.3.3.1.3 Test suite parameter definitions for radio layer for BS, MS and DM-GATE.....	35
5.3.3.2 Radio layer test specification for TMO-REP	36
5.3.3.2.1 Test case index for radio layer for TMO-REP.....	36
5.3.3.2.2 Test case selection expression definitions for radio layer for TMO-REP	36
5.3.3.2.3 Test suite parameter definitions for radio layer for TMO-REP	36
5.3.4 MAC layer test specification	37
5.3.4.1 Test suite structure for MAC layer.....	37
5.3.4.2 Test case index for MAC layer	37
5.3.4.3 Test case selection expression definitions for MAC layer	38
5.3.4.4 Test suite parameter definitions for MAC layer.....	38
5.3.5 LLC layer test specification	39
5.3.5.1 Test suite structure for LLC layer	39
5.3.5.2 Test case index for LLC layer.....	39
5.3.5.3 Test case selection expression definitions for LLC layer.....	40
5.3.5.4 Test suite parameter definitions for LLC layer	40
5.3.6 Mobile Link Entity (MLE) test specification.....	41
5.3.6.1 Test suite structure for Mobile Link Entity (MLE).....	41
5.3.6.2 Test case index for Mobile Link Entity (MLE).....	41
5.3.6.3 Test case selection expression definitions for Mobile Link Entity (MLE).....	42
5.3.6.4 Test suite parameter definitions for Mobile Link Entity (MLE).....	42
5.3.7 Mobility Management (MM) test specification	43

5.3.7.1	Mobility Management (MM) test specification for MS	43
5.3.7.1.1	Test suite structure for Mobility Management (MM) for MS	43
5.3.7.1.2	Test case index for Mobility Management (MM) for MS	43
5.3.7.1.3	Test case selection expression definitions for Mobility Management (MM) for MS	44
5.3.7.1.4	Test suite parameter definitions for Mobility Management (MM) for MS	44
5.3.7.2	Mobility Management (MM) test specification for DM-GATE.....	45
5.3.7.2.1	Test suite structure for Mobility Management (MM) for DM-GATE.....	45
5.3.7.2.2	Test case index for Mobility Management (MM) for DM-GATE.....	45
5.3.7.2.3	Test case selection expression definitions for Mobility Management (MM) for DM-GATE	45
5.3.7.2.4	Test suite parameter definitions for Mobility Management (MM) for DM-GATE.....	46
5.3.8	Circuit Mode Control Entity (CMCE) test specification	46
5.3.8.1	Circuit Mode Control Entity (CMCE) test specification for MS	46
5.3.8.1.1	Test suite structure for Circuit Mode Control Entity (CMCE) for MS.....	46
5.3.8.1.2	Test case index for Circuit Mode Control Entity (CMCE) for MS	47
5.3.8.1.3	Test case selection expression definitions for Circuit Mode Control Entity (CMCE) for MS	50
5.3.8.1.4	Test suite parameter definitions for Circuit Mode Control Entity (CMCE) for MS.....	50
5.3.8.2	Circuit Mode Control Entity (CMCE) test specification for DM-GATE.....	51
5.3.8.2.1	Test suite structure for Circuit Mode Control Entity (CMCE) for DM-GATE	51
5.3.8.2.2	Test case index for Circuit Mode Control Entity (CMCE) for DM-GATE.....	52
5.3.8.2.3	Test case selection expression definitions for Circuit Mode Control Entity (CMCE) for DM-GATE.....	53
5.3.8.2.4	Test suite parameter definitions for Circuit Mode Control Entity (CMCE) for DM-GATE	53
Annex A (normative): The EN Requirements Table (EN-RT)		54
A.1	General capabilities of equipment	55
A.1.1	Type of equipment.....	55
A.1.2	Protocol layers.....	55
A.1.3	Modes of operation.....	56
A.1.4	Environmental profile.....	56
A.2	Radio layer requirements.....	57
A.2.1	Radio layer capabilities and features.....	57
A.2.2	Radio layer requirements associated with frequency and channel allocation.....	58
A.2.3	Radio layer requirements associated with transmitting functions.....	59
A.2.4	Radio layer requirements associated with receiving functions.....	61
A.2.5	Radio layer requirements associated with control and monitoring functions.....	62
A.3	Medium Access Control (MAC) layer requirements	62
A.3.1	Lower MAC layer	62
A.3.2	Upper MAC layer.....	63
A.4	Logical Link Control (LLC) layer requirements.....	66
A.5	Mobile Link Entity (MLE) requirements	68
A.6	Mobility Management (MM) requirements.....	69
A.6.1	MM requirements for an MS	69
A.6.2	MM requirements for a Gateway	70
A.7	Circuit Mode Control Entity (CMCE) requirements.....	71
A.7.1	CMCE requirements for an MS.....	71
A.7.2	CMCE requirements for a Gateway	75
Annex B (normative): Declarations on capabilities and parameters supported		77
B.1	Radio layer	77
B.2	Medium Access Control (MAC)	78
B.3	Mobile Link Entity (MLE).....	78
B.4	Mobility Management (MM)	79
B.5	Circuit Mode Control Entity (CMCE).....	79
Annex C (informative): The EN title in the official languages		80

Annex D (informative):	Justifications for requirements.....	81
Annex E (informative):	Bibliography.....	83
History		84

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 035-1 V1.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Project Terrestrial Trunked Radio (TETRA).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive" [1]).

The present document is part 1 of a multi-part deliverable covering Harmonized EN for TETRA equipment covering essential requirements under article 3.2 of the R&TTE Directive, as identified below:

- Part 1:** "Voice plus Data (V+D)"; [SIST EN 303 035-1 V1.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2-a708ff1c8bbf/sist-en-303-035-1-v1-2-1-2003)
- Part 2:** "Direct Mode Operation (DMO)".

Technical specifications relevant to Directive 1999/5/EC [1] are given in annex A.

National transposition dates	
Date of adoption of this EN:	14 December 2001
Date of latest announcement of this EN (doa):	31 March 2002
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 September 2002
Date of withdrawal of any conflicting National Standard (dow):	30 September 2003

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

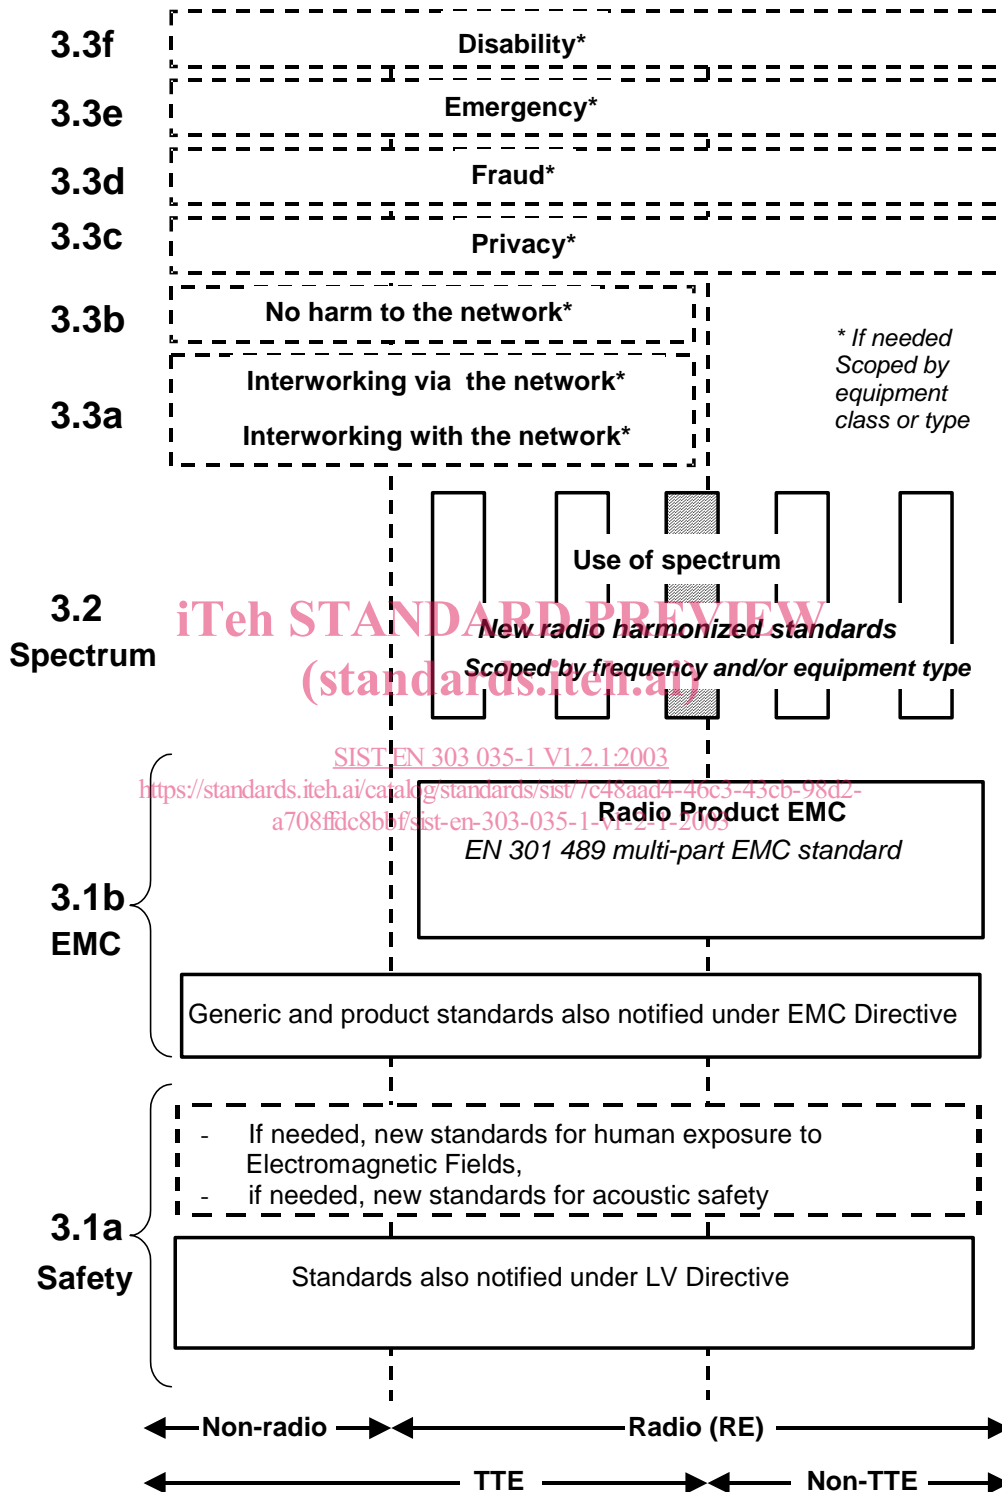


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different clauses of article 3 of the R&TTE Directive [1].

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document, essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b the diagram shows EN 301 489, the multi-part product EMC standard for radio used under the EMC Directive [2].

For article 3.1a the diagram shows the existing safety standards currently used under the LV Directive [3] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive [1] is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive [1] may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions
 without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

1 Scope

The present document specifies the technical characteristics to be provided by Terrestrial Trunked Radio (TETRA) radio and telecommunications terminal equipment, which uses the TETRA technology for Trunked Mode Operation at the air interface to support the Voice plus Data (V+D) functionality.

The present document applies at the TETRA Voice plus Data (V+D) Air interface of the following radio and telecommunications terminal equipment types:

- 1) TETRA Base Station (BS);
- 2) TETRA Mobile Station (MS);
- 3) TETRA DMO Gateway (DM-GATE);
- 4) TETRA TMO Repeater (TMO-REP).

It applies to terminal equipment operating within the frequency ranges, allocated to TETRA by the ERC Decisions ERC/DEC(96)01 [17] and ERC/DEC(96)04 [18].

These radio equipment types are capable of operating in all or any part of the frequency bands given in table 1.

Table 1: Radio communications service frequency bands

Type of Service	Radio communications service frequency bands (MHz)	
	Uplink	Downlink
Emergency Access, ERC/DEC(96)01 [17]	380 to 385	390 to 395
Civil Access, ERC/DEC(96)04 [18]	410 to 420	420 to 430
Civil Access, ERC/DEC(96)04 [18]	870 to 876	915 to 921
Civil Access, ERC/DEC(96)04 [18]	450 to 460	460 to 470
Civil Access, ERC/DEC(96)04 [18]	385 to 390	395 to 399,99

The present document is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive), article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

- [2] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [3] Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- [4] ETSI EN 300 392-2 (V2.3.2) (2001): "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 2: Air Interface (AI)".
- [5] ETSI ETS 300 392-14 (Edition 1) (1997): "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 14: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [6] ETSI TS 100 392-15 (V1.1.1) (2000): "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 15: TETRA frequency bands, duplex spacings and channel numbering".
- [7] ETSI EN 300 394-1 (V2.3.1) (2001): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 1: Radio".
- [8] ETSI ETS 300 394-2-1 (Edition 1) (1998): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 2: Protocol testing specification for Voice plus Data (V+D); Sub-part 1: Test suite structure and test purposes".
- [9] ETSI ETS 300 394-2-2 (Edition 1) (1998): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 2: Protocol testing specification for Voice plus Data (V+D); Sub-part 2: Abstract Test Suite (ATS) for Network (NWK) layer".
- [10] ETSI ETS 300 394-2-3 (Edition 1) (1998): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 2: Protocol testing specification for Voice plus Data (V+D); Sub-part 3: Abstract Test Suite (ATS) for Logical Link Control (LLC)".
- [11] ETSI ETS 300 394-2-4 (Edition 1) (1998): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 2: Protocol testing specification for Voice plus Data (V+D); Sub-part 4: Abstract Test Suite (ATS) for Medium Access Control (MAC)".
- [12] ETSI ETS 300 394-4-8 (Edition 1) (1999): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 8: Test suite structure and test purposes (TSS&TP) for Direct Mode Gateway (DM-GATE)".
- [13] ETSI ETS 300 394-4-10 (Edition 1) (1999): "Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 10: Abstract Test Suite (ATS) for Direct Mode Gateway (DM-GATE)".
- [14] ETSI ETS 300 396-5 (Edition 1) (2000): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 5: Gateway air interface".
- [15] ETSI ETS 300 396-8-3 (Edition 1) (1999): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statement (PICS) proforma specification; Sub-part 3: Gateway Air Interface (AI)".
- [16] ETSI TS 101 789-1 (V1.1.1) (2000): "Terrestrial Trunked Radio (TETRA); TMO Repeaters; Part 1: Requirements, test methods and limits".
- [17] CEPT ERC/DEC/(96)01: "ERC Decision of 7 March 1996 on the harmonised frequency band to be designated for the introduction of the Digital Land Mobile System for the Emergency Services".
- [18] CEPT ERC/DEC/(96)04: "ERC Decision of 7 March 1996 on the frequency bands for the introduction of the Trans European Trunked Radio System (TETRA)".
- [19] ETSI ETR 028 (Edition 2, 1994): "Radio Equipment and Systems (RES); Uncertainties in the measurement of mobile radio equipment characteristics".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [1] and the following apply:

acknowledged data transfer: service provided by the layer below which gives an acknowledgement back over the air interface from the lower layer peer entity

NOTE: This service is used by the layer 3 entities to get a secure transmission including re-transmissions.

announced cell re-selection: cell re-selection where MS-MLE informs the SwMI both in the old cell (leaving cell) and in the new cell (arriving cell) that cell change is performed

Associated Control CHannel (ACCH): dedicated signalling channel associated with a channel that has been assigned for circuit mode traffic

NOTE: It comprises the Fast Associated Control CHannel (FACCH), which uses frames 1 to 18 when there is no traffic in a given direction, or the Slow Associated Control CHannel (SACCH), which is always available in frame 18 when there is traffic.

attached: an MS is said to be attached to a cell when the MS is camped and registered on the cell

NOTE: The MS may be in idle mode (i.e. not actively processing a transaction) or in active mode (i.e. actively processing a transaction in reception and/or in transmission). It is the MM, which decides when a MS is said to be attached.

basic link: bi-directional connectionless path between one or several MS and a BS, with a provision of both unacknowledged and acknowledged services on a single message basis

broadcast: unidirectional point to multi-point mode of transmission

cell re-selection: act of changing the serving cell from an old cell to a new cell

NOTE: The cell re-selection is performed by procedures located in the MLE and in the MAC. When the re-selection is made and possible registration is performed, the MS is said to be attached to the cell.

common control channels: control channels transmitted by the infrastructure to control the MS population

NOTE: They comprise the Main Control CHannel (MCCH) and common Secondary Control Channels (SCCH).

Direct Mode GATEway (DM-GATE): device which provides gateway connectivity between a Direct Mode Mobile Station and the TETRA V+D network

NOTE: The gateway provides the interface between TETRA DMO and TETRA V+D mode.

direct set-up signalling: signalling procedure where immediate communication can take place between the calling and the called users without the alerting process and without an explicit response from the called user that he has answered

duplex frequency spacing: fixed frequency spacing between up and downlink frequencies directions

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document

Individual TETRA Subscriber Identity (ITSI): identity used to specify an individual TETRA user

NOTE: An ITSI cannot be shared by multiple users.

initial cell selection: act of choosing a first serving cell to register in

NOTE: The initial cell selection is performed by procedures located in the MLE and in the MAC. When the cell selection is made and possible registration is performed, the MS is said to be attached to the cell.

Linearization CHannels (BLCH and CLCH): channels, which may be used by the equipment to linearize its transmitter

NOTE: The linearization burst contains no useful bits.

logical channel: generic term for any distinct data path. Logical channels are considered to operate between logical endpoints

Main Control CHannel (MCCH): principal common control channel transmitted by the infrastructure to control the MSs in a cell

NOTE: The frequency of the main carrier for the cell is broadcast by the infrastructure, and the MCCH is located on timeslot 1 of the main carrier.

on/off hook signalling: signalling procedure, which includes an alerting process to the called user

NOTE: An explicit response from the called user that he has answered is waited before the call can be set-up.

Secondary Control CHannel (SCCH): control channel other than the MCCH

TMO Repeater: bi-directional Radio Frequency (RF) amplifier which can amplify and transmit a received Mobile Station (MS) signal in the TETRA MS transmit band, simultaneously it can amplify and transmit a received Base Station (BS) RF signal in the TETRA BS transmit band

Trunked Mode Operation (TMO): mode of operation where a network is used for communication

unacknowledged data transfer: service provided by the layer below which does not give any acknowledgement back to over the air interface from the lower layer peer entity

unannounced cell re-selection: cell re-selection where the MS-MLE does not inform the old cell (leaving cell) that it intends to change to a new cell

NOTE: Only the new cell (arriving cell) is informed about the MS-MLE.

undeclared cell re-selection: cell re-selection where the MS-MLE does not inform the old cell (leaving cell) nor the new cell (arriving cell) that cell change is performed

useful part of a burst: modulation symbol times SN0 to SNmax of a burst

V+D operation: mode of operation where MSs may communicate via the TETRA V+D air interface, which is controlled by the TETRA Switching and Management Infrastructure (SwMI)

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AACH	Access Assignment CHannel
ACCH	Associated Control CHannel
AT	ATtachment
ATS	Abstract Test Suite
BA	Basic link, Acknowledged service
BCCH	Broadcast Control CHannel
BI	Behaviour Invalid
BLCH	Base station Linearization CHannel
BNCH	Broadcast Network CHannel
BS	Base Station
BSCH	Broadcast Synchronization CHannel
CA	CApability test
CC	Call Control
CLCH	Common Linearization CHannel
CM	Circuit Mode
CMCE	Circuit Mode Control Entity
CR	Cell Reselection
CSS	Carrier Specific Signalling

DM-GATE	Direct Mode GATEway
DM-MS	Direct Mode Mobile Station
DMO	Direct Mode Operation
EMC	Electro-Magnetic Compatibility
EN	European Norme
EN-RT	EN Requirement Table
ETS	European Telecommunication Standard
FCS	Frame Check Sequence
GC	Group Call
GSSI	Group Short Subscriber Identity
GW	Direct Mode GateWay
HD	Half-slot Down-link
HU	Half-slot Up-link
IC	Individual Call
ID	IDentity
IMP	IMPlicit
ITSI	Individual TETRA Subscriber Identity
IUT	Implementation Under Test
LA	Location Area
LLC	Logical Link Control
LV	Low Voltage
MA	MAintenance
MAC	Medium Access Control
MCC	Mobile Country Code
MCCH	Main Control CHannel
MCM	Minimum Control Mode
MLE	Mobile Link Entity
MM	Mobility Management
MNC	Mobile Network Code
MNI	Mobile Network Identity
MS	Mobile Station
NB	Network Broadcast
NCM	Normal Control Mode
NWK	NetWoRK layer
OC	Outgoing Call
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
R&TTE	Radio and Telecommunications Terminal Equipment
RA	Random Access
RE	REserved Access (for MAC layer), or REgistration (for MLE layer), or Radio Equipment
RF	Radio Frequency
RT	Requirements Table
SCCH	Secondary Control CHannel
SCH	Signalling CHannel
SCH/F	Signalling CHannel, Full-slot
SCH/H	Signalling CHannel, Half-slot
SDU	Service Data Unit
SSI	Short Subscriber Identity
STCH	STealing CHannel
SU	Set-Up
SwMI	Switching and Management Infrastructure
TC	Transmission Control
TCH	Traffic CHannel
TETRA	TErrestrial Trunked RAdio
TI	TImer
TM	TETRA MAC layer
TMO	Trunked Mode Operation
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Tree and Tabular Combined Notation
V+D	Voice and Data

STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 035-1 V1.2.1:2003](#)

<http://standards.iteh.ai/catalog/standards/sist/7c48aad4-46c3-43cb-98d2->

[a708ffdc8bbf/sist-en-303-035-1-v1-2-1-2003](http://standards.iteh.ai/catalog/standards/sist-en-303-035-1-v1-2-1-2003)