

SLOVENSKI STANDARD SIST EN ISO 4320:1997

01-december-1997

Neionske površinsko aktivne snovi - Določanje indeksa točke zmotnitve - Volumetrična metoda (ISO 4320:1977, vključujoč popravek tiskovne napake:1980)

Non-ionic surface active agents - Determination of cloud point index - Volumetric method (ISO 4320:1977, Including Erratum:1980)

Nichtionische Tenside - Bestimmung der Trübungstitrationszahl - Volumetrisches Verfahren (ISO 4320:1977, einschließlich Erratum:1980) FVIII W

Agents de surface non ioniques - Détermination de l'indice de trouble - Méthode volumétrique (ISO 4320:1977, Erratum:1980 inclus)

https://standards.iteh.ai/catalog/standards/sist/e36f1bc6-1c80-44f7-95bb-

Ta slovenski standard je istoveten z: EN ISO 4320-1997

ICS:

71.100.40 Površinsko aktivna sredstva Surface active agents

SIST EN ISO 4320:1997 en

SIST EN ISO 4320:1997

iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST EN ISO 4320:1997</u> https://standards.iteh.ai/catalog/standards/sist/e36fl bc6-1c80-44f7-95bb-6ac218901ae9/sist-en-iso-4320-1997 **SIST EN ISO 4320:1997**

EUROPEAN STANDARD

EN ISO 4320

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 1997

ICS 71.100.40

Descriptors:

see ISO document

English version

Non-ionic surface active agents - Determination of cloud point index - Volumetric method (ISO 4320:1977, Including Erratum:1980)

Agents de surface non ioniques - Détermination ARD PRE Nichtionische Tenside - de l'indice de trouble - Méthode volumétrique ARD PRE Trübungstitrationszahl - Volumetrisches (ISO 4320:1977, Erratum:1980 inclus)

**Comparison of the property of the propert

<u>SIST EN ISO 4320:1997</u> https://standards.iteh.ai/catalog/standards/sist/e36f1bc6-1c80-44f7-95bb-6ac218901ae9/sist-en-iso-4320-1997

This European Standard was approved by CEN on 1997-04-06. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization Comité Européen de Normalisation Europäisches Komitee für Normung

Central Secretariat: rue de Stassart,36 B-1050 Brussels

Page 2 EN ISO 4320:1997

Foreword

The text of the International Standard from Technical Committee ISO/TC 91 "Surface active agents" of the International Organization for Standardization (ISO) has been taken over as an European Standard by Technical Committee CEN/TC 276 "Surface active agents", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by month of November 1997, and conflicting national standards shall be withdrawn at the latest by November 1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

(standards.iteh.ai)

Endorsement notice

SIST EN ISO 4320:1997

The text of the international Standard ISO 4320:1977 blncluding Erratum: 1980 has been approved by CEN as a European Standard without any modification.

INTERNATIONAL STANDARD 4320

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION •МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ •ORGANISATION INTERNATIONALE DE NORMALISATION

Non-ionic surface active agents — Determination of cloud point index — Volumetric method

Agents de surface non ioniques — Détermination de l'indice de trouble — Méthode volumétrique

First edition – 1977-02-01 (standards.iteh.ai)

<u>SIST EN ISO 4320:1997</u> https://standards.iteh.ai/catalog/standards/sist/e36f1bc6-1c80-44f7-95bb-6ac218901ae9/sist-en-iso-4320-1997

UDC 661.185 : 543 Ref. No. ISO 4320-1977 (E)

Descriptors: surfactants, non-ionic surfactants, tests, determination, cloud point, volumetric analysis.

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 4320 was drawn up by Technical Committee VIRIV ISO/TC 91, Surface active agents, and was circulated to the member bodies in (standards.iteh.ai) October 1975.

It has been approved by the member bodies of the following countries:

https://standards.iteh.ai/catalog/standards/sist/e36f1bc6-1c80-44f7-95bb-ran 6ac218901ac/sist-en-iso-4320-1997 Romania Iran Austria Belgium Italy

Brazil Japan South Africa, Rep. of

Canada Korea, Dem. P. Rep. of Spain France Mexico Switzerland Germany Netherlands Turkey

United Kingdom Hungary New Zealand

India Poland U.S.A.

No member body expressed disapproval of the document.

Non-ionic surface active agents — Determination of cloud point index - Volumetric method

0 INTRODUCTION

Determination of the cloud point index provides a way of characterizing weakly alkoxylated derivatives and their hydrocarbon hydrophobic groups.

This simple and rapid measurement is a valuable means for checking the level of alkoxylation of non-ionic derivatives intended, for example, for sulphonation.

5 PRINCIPLE

6 REAGENTS

Addition, at 30 °C, of distilled water to a propanol solution of the surface active agent until the appearance of cloudiness

1 SCOPE

This International Standard specifies a volumetric method for the determination of the cloud point index of non-jonic R surface active agents.

6.1 Distilled water.

(standards.i62 Propan-1-ol, complying with the following require-

2 FIELD OF APPLICATION

SISTEN ISO 4320:1997 assay (by gas chromatography) 99 % (m/m); The method is applicable to weakly alkoxylated non-ionic surface active agents (1 to 5 oxyethylene groups) the density ρ_{20} 0,804 to 0,805 g/ml; buttonbobic group of which is provided by 30 slephons and 10 slephons are provided by 30 slepho hydrophobic group of which is provided by an alcohol, an alkylphenol or a fatty acid (provided that the last has a melting point lower than 30 °C), subject to the product being soluble in propan-1-ol to the extent of 1 g in 10 ml at 30 °C.

It is equally applicable to lipophilic bases derived from alcohols, alkylphenols and fatty acids.

3 REFERENCE

ISO 607, Surface active agents - Detergents - Methods of sample division.1)

4 DEFINITION

For the purposes of this International Standard, the following definition applies:

cloud point index: The number of millilitres of distilled water necessary to render cloudy, at a specified temperature, a solution containing a given mass of surface active agent in a given volume of solvent.

- refractive index n_D^{20} 1,384 to 1,385;
- non-volatile matter < 0,005 % (m/m);
- free acidity (expressed as C_2H_5COOH) < 0.01% (m/m):
- water (determined by the Karl Fischer method; see ISO 760) < 0.2 % (m/m).

7 APPARATUS

Ordinary laboratory apparatus, and in particular:

7.1 Beaker (see the figure) of height 80 mm and diameter 50 mm, with double walls permitting temperature stability, and having a mass less than 200 g, fitted with a polyethylene, polytetrafluoroethylene or an aluminium foil cover pierced with two holes allowing entry of the thermometer (7.2) and the burette (7.4).

¹⁾ In preparation. (Revision of ISO/R 607.)

ISO 4320-1977 (E)

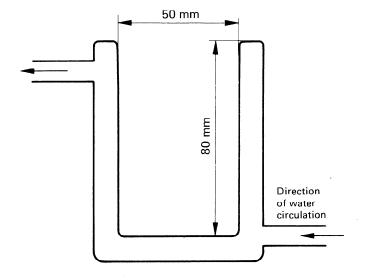


FIGURE - Double-walled beaker

Fit the beaker (7.1) onto the water bath (7.7) and control the temperature at 30,0 \pm 0,1 °C.

Start the water circulation and the stirrer (stir gently at first in order to avoid splashing the liquid on the walls of the beaker).

Ensure that the test portion is completely dissolved (the solution should be clear) and add, drop by drop, the water (6.1) from the burette (7.4) until the liquid remains cloudy.

Check that the temperature in the beaker is maintained at 30.0 ± 0.5 °C during the complete operation.

The results of the test depend upon the speed of introduction of the water. Hence, the period during which it is introduced should be between 20 and 30 min, according to the quantity of water introduced.

Immediately after the cloud point is reached, allow the solution to equilibrate for 5 min so as to verify that the turbidity does not disappear.

7.2 Thermometer, STC/0,1/29/41, complying with the requirements of ISO/R 654.

Ten STAND A10 EXPRESSION OF RESULTS

7.3 One-mark pipette, capacity 10 ml, complying with the (standards.iteh.ai)
10.1 Method of calculation

7.4 Burette, capacity 50 ml, complying with the require EN 15the cloud point index of the product is expressed as the ments of class A of ISO 385. https://standards.iteh.ai/catalog/standonlimiet/in/fillitilitrles/fof-Water introduced to render cloudy 6ac218901ae9/sis10:mlsofla2100 g///solution of non-ionic surface active agent in propan-1-ol.

7.5 Magnetic stirrer.

7.6 Bar magnet, coated with polytetrafluoroethylene.

7.7 Water bath, with circulation, capable of being controlled to within ± 0,1 °C.

Take as the result the mean of at least three determinations, expressed to the nearest 0,05 ml (1 drop of water).

8 SAMPLING

The laboratory sample of the non-ionic surface active agent shall be prepared and stored according to the instructions in ISO 607.

10.2 Repeatability

The maximum difference between the results of two determinations carried out in rapid succession on the same sample, by the same analyst using the same apparatus, should not exceed 2 % of the mean volume found.

9 PROCEDURE

9.1 Test portion

Weigh, to the nearest 0,001 g, 1,0 \pm 0,1 g of the laboratory sample into the beaker (7.1), previously weighed to the nearest 0,001 q.

10.3 Reproducibility

The difference between results obtained on the same sample in two different laboratories should not exceed 5 % of the mean volume found.

9.2 Determination

Add 10 ml of the propan-1-ol (6.2) to the beaker (7.1) containing the test portion (9.1). Introduce the bar magnet (7.6), place the beaker fitted with its cover on the magnetic stirrer (7.5) and insert the thermometer (7.2).

11 TEST REPORT

The test report shall include the following particulars:

a) all information necessary for the complete identification of the sample;