
International Standard



7643

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Road vehicles — Caravans and light trailers — Bench test methods of brake controls for inertia braked trailers of categories 01 and 02

Véhicules routiers — Caravanes et remorques légères — Méthodes d'essai au banc des dispositifs de commande de freinage pour remorques des catégories 01 et 02 freinées par inertie

ITeH STANDARD PREVIEW

First edition — 1983-12-01

(standards.iteh.ai)

[ISO 7643:1983](https://standards.iteh.ai/catalog/standards/sist/f75e731a-eb1e-40b5-955f-1015c6d40bda/iso-7643-1983)

<https://standards.iteh.ai/catalog/standards/sist/f75e731a-eb1e-40b5-955f-1015c6d40bda/iso-7643-1983>

UDC 629.114.3 : 62-59

Ref. No. ISO 7643-1983 (E)

Descriptors: road vehicles, bench testing, braking, trailers.

Price based on 4 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7643 was developed by Technical Committee ISO/TC 22, *Road vehicles*, and was circulated to the member bodies in October 1982.

It has been approved by the member bodies of the following countries:

Austria	Hungary	Poland
Belgium	Iran	Romania
Brazil	Italy	South Africa, Rep. of
China	Japan	Spain
Czechoslovakia	Korea, Dem. P. Rep. of	United Kingdom
Egypt, Arab Rep. of	Korea, Rep. of	USSR
Germany, F.R.	New Zealand	

The member bodies of the following countries expressed disapproval of the document on technical grounds:

France
Netherlands
Sweden

Road vehicles — Caravans and light trailers — Bench test methods of brake controls for inertia braked trailers of categories 01 and 02

iTeh STANDARD PREVIEW
(standards.iteh.ai)

0 Introduction

Test procedure defined in this International Standard is based on the requirements of ECE Regulation No. 13 of the United Nations, *Uniform provisions concerning the approval of vehicles with regard to braking.*¹⁾

It is therefore recommended that reference should be made to this Regulation to assist with the use of this International Standard.

1 Scope and field of application

This International Standard specifies test methods which may be applied to the type approval of categories 01 and 02²⁾ trailers

with inertia brakes by testing the control devices on a linear test bench.

The static load on the coupling shall be within the limits set by ISO/TR 4114.

This International Standard does not apply to control devices fitted with stress reducers.

2 Reference

ISO/TR 4114, *Road vehicles — Caravans and light trailers — Static load on ball couplings.*

1) Only SI units are used in this International Standard.

2) Definitions of UNO/ECE Regulation No. 13:

category 01: Single axled trailers, other than semi-trailers, with a maximum weight not exceeding 0,75 t.

category 02: Trailers with a maximum weight not exceeding 3,5 t other than trailers of category 01.

3 Symbols and definitions

G'_A is the trailer total weight capable of being braked by the control device, as declared by the manufacturer;

G'_{A1} is the minimum total weight capable of being braked;

G'_{A2} is the maximum total weight capable of being braked;

S is the travel of the control, in millimetres;


S' is the effective (useful) travel of the control in millimetres;

S_0 is the loss of travel, applicable to multi-axle trailers only, i.e. travel in millimetres of coupling head when this is actuated to move from 300 mm above to 300 mm below the horizontal, the transmission remaining stationary;

S'' is the spare travel of the master cylinder, measured in millimetres at the coupling head;

i_{H_0} is the reduction ratio between the travel of the coupling head and the travel of the lever at the output side of the control device;

$i_{H_0}^*$ is the reduction ratio measured at the mid-travel position of the control, and with the lever vertical;

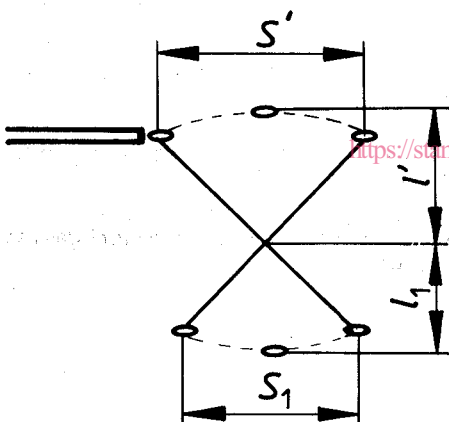

$$i_H = \frac{S'}{S_1}$$

$$i_{H_0}^* = \frac{l'}{l_1}$$

i_h is the reduction ratio between the travel of the coupling head and the travel of the piston in the master cylinder (in the case of hydraulic transmission brakes);

i_h^* is the reduction ratio i_h measured at the mid-travel position of the control;

F_{Hz} is the surface area of the piston of the master cylinder (in the case of hydraulic transmission brakes);

K_A is the force threshold of the control device, i.e. the maximum thrust on the coupling head which can be supplied for a short time without placing any force on the output side of the control device;

D is the longitudinal force occurring between the towing vehicle and towed vehicle;

D_1 is the maximum force applied to the coupling head when it is being pushed at the speed specified in 7.1.2, with the transmission uncoupled;

D_2 is the maximum force applied to the coupling head when it is being pulled at the speed specified in 7.2, with the transmission uncoupled;

η_{H_0} is the efficiency of the inertia control device;

P' is the control device output force;

K is the supplementary force of the control device, conventionally designated by the force D corresponding to the point of intersection with the axis of the abscissae of the extrapolated curve expressing P' in terms of D , measured with the device in the mid-travel position.

4 Test conditions

Before carrying out any test, the manufacturer shall state:

G'_A , in decanewtons;

F_{Hz} , in square centimetres (in the case of hydraulic transmission brakes).

Tests shall be carried out at the test room ambient temperature (20 ± 10 °C).

5 Description of the test bench

The test bench shall be able to keep the control device to be tested horizontal.

It shall be possible to carry out the following measurements on the test bench:

- input force on the coupling head, D ;
- output force on the end part of the control device, P' , or hydraulic pressure p ;
- travel of the control;
- travel speed of the control.

The test bench shall allow measurement of forces under oscillation to be carried out.

6 Parameters to be measured

The following parameters shall be measured:

- travel of the control, S , in millimetres;
- effective travel of the control, S' , in millimetres;
- loss of travel, S_0 , in millimetres;
- spare travel of the master cylinder (in the case of hydraulic inertia braking system), S'' , in millimetres;
- reduction ratio, i_{H_0} ;
- reduction ratio, $i_{H_0}^*$, in the case of mechanical transmission brakes;
- reduction ratio, i_h ;
- reduction ratio, i_h^* , in the case of hydraulic transmission brakes;

- force threshold, K_A , in decanewtons;
- insertion force, D_1 , in decanewtons;
- reactive force, D_2 , in decanewtons;
- efficiency of inertia control devices, η_{H_0} ;
- supplementary force, K , in decanewtons.

7 Tests — Determination of $G'_{A\min}$ and $G'_{A\max}$

The control device shall be mounted horizontally on the test bench and fixed according to the manufacturer's requirements, with the transmission disconnected. No vertical or lateral load on the coupling head is allowed during the test.

7.1 Measurement at insertion

7.1.1 Force threshold, K_A

Measurements shall be made under the following conditions:

- a) The device is inserted at a constant speed of 10^{+1}_0 mm/s. Force is measured at the beginning of the insertion over a travel range corresponding to

$$S_0 + S'' + 0,25 S'$$

- b) The device is inserted at a constant speed of 15^{+0}_-1 mm/s. Force is measured at the beginning of the insertion over a travel range corresponding to

$$S_0 + S'' + 0,25 S'$$

The value of K_A is obtained by averaging the forces recorded at 10 mm/s and 15 mm/s.

7.1.2 Maximum insertion force, D_1

The control device is inserted at a constant speed of $S \pm 10\%$ in millimetres per second. The measured force (at any stroke position outside range of K_A) corresponds to the recorded maximum.

7.2 Measurement at retraction, D_2

The control device is retracted at a constant speed of $S \pm 10\%$ in millimetres per second. The measured force (at any stroke position outside range of K_A) corresponds to the recorded maximum.

7.3 Conditions to be checked

With the values of K_A , D_1 and D_2 as measured in 7.1.1, 7.1.2 and 7.2, determine the application range between $G'_{A1\min}$ and $G'_{A2\max}$:

iteh STANDARD PREVIEW
(standards.iteh.ai)


$$G'_{A1\min} = \frac{K_A}{0,04} \qquad G'_{A2\max} = \frac{K_A}{0,02}$$

$$G'_{A1\min} = \frac{D_1}{0,09} \text{ for single}^1 \text{ axle trailers}$$

or

$$G'_{A1\min} = \frac{D_1}{0,06} \text{ for multi-axle trailers}$$

$$G'_{A1\min} = \frac{D_2}{0,5} \qquad G'_{A2\max} = \frac{D_2}{0,1}$$

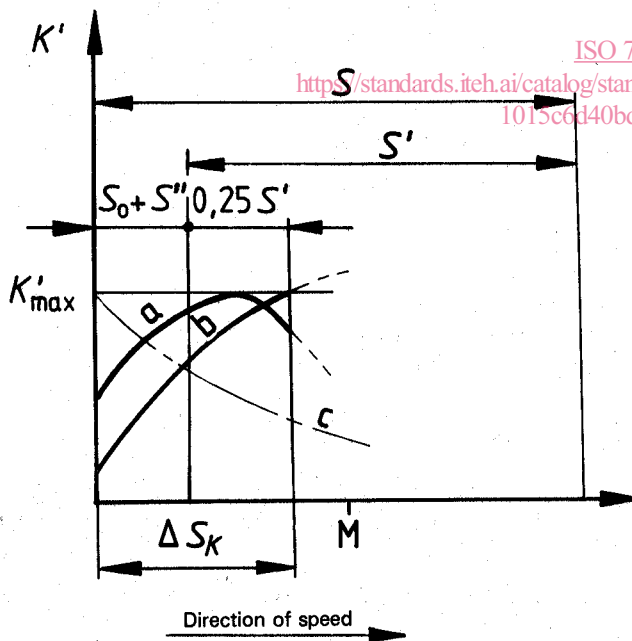

- a } different types
- b }
- c }
- $K'_{\max} = K_A$
- M = mid-travel position

8 Mechanical transmission control device

8.1 Determination of η_{H_0} and K


Measurements shall be carried out with the control device at mid-travel position.

Forces P' are measured as a function of increasing forces D .

At least three series of measurements are necessary, each including five appropriately distributed points up to a minimum force $D = 0,09 G'_{A\max}$ for single¹⁾ axle trailers or $D = 0,06 G'_{A\max}$ for multi-axle trailers.

1) Or tandem if less than 1 m apart.

$P' = f(D)$, can be obtained from the average.

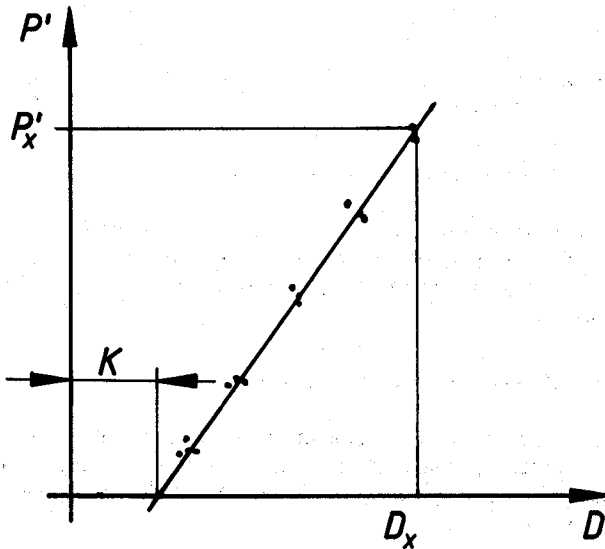

From this can be obtained:

the value of K , and

$$\eta_{H_0} = \frac{P'_x}{D_x - K} \times \frac{1}{i_{H_0}^*}$$

with

$D_x = 0,09 G'_{A_{max}}$ for single¹⁾ axle trailers, or

$D_x = 0,06 G'_{A_{max}}$ for multi-axle trailers.

9 Hydraulic transmission control device


9.1 Determination of η_{H_0} and K

Measurements shall be carried out with the braking device at mid-travel position.

Forces P' are measured as a function of increasing forces D .

At least three series of measurements are necessary, each including five appropriately distributed points up to a minimum force $D = 0,09 G'_{A_{max}}$ for single¹⁾ axle trailers or $D = 0,06 G'_{A_{max}}$ for multi-axle trailers.

$P' = f(D)$ can be plotted by the average.

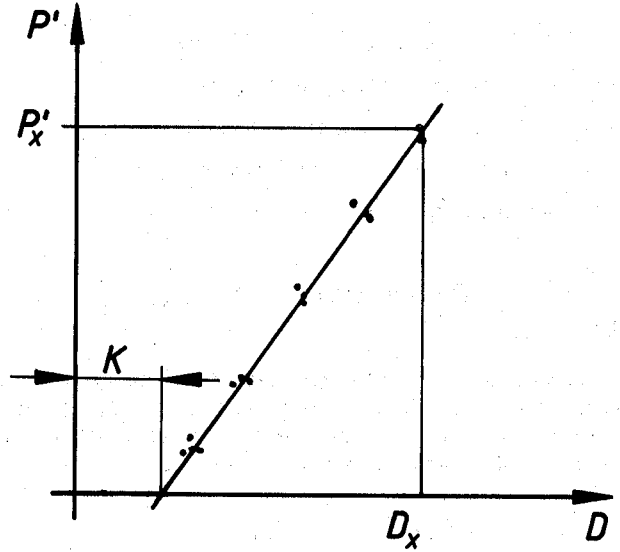

From this can be obtained:

the value of K , and

$$\eta_{H_0} = \frac{P'_x}{D_x - K} \times \frac{F_{H_2}}{i_h^*}$$

with

$D_x = 0,09 G'_{A_{max}}$ for single¹⁾ axle trailers, or

$D_x = 0,06 G'_{A_{max}}$ for multi-axle trailers.

iTech STANDARD PREVIEW
(standards.itech.ai)

ISO 7643:1983
<https://standards.itech.ai/catalog/standards/sist/f75e731a-eb1e-40b5-955f-1015c6d40bda/iso-7643-1983>

10 Static strength test of control device

The control device shall be loaded with a thrust on the coupling head of:

$$D'' = 2,5 D_x$$

The force D'' shall be maintained for 5 s, with the transmission coupled.

This test shall be carried out in the mid-travel position of the control using the reduction ratio $i_{H_0}^*$ or i_h^* as suitable.

After this test the control device and its coupled transmission shall still have a free movement in both directions within the total travel S .

No permanent distortions or breaks are allowed.

After testing, disassemble and inspect the control device, especially the drawbar and its bearings, the reduction lever and its pivot pin.

No visible damage that will affect strength or free movement is permitted.

1) Or tandem if less than 1 m apart.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 7643:1983

<https://standards.iteh.ai/catalog/standards/sist/f75e731a-eb1e-40b5-955f-1015c6d40bda/iso-7643-1983>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 7643:1983

<https://standards.iteh.ai/catalog/standards/sist/f75e731a-eb1e-40b5-955f-1015c6d40bda/iso-7643-1983>