

## SLOVENSKI STANDARD

SIST TBR 012 E1:2004

01-oktober-2004

Dcg`cj bY'hY'Y\_ca i b]\_UWY'f6 H7 L!HM b] bY'nU hYj Y'nU nU[ cHj `Ub'YcXdfhcgj  
ca fYj]`!`8][ ]HJb]`nU\_i d`Yb]`j cX]`nU dfYbcgbc \ ]fcgh&\$(`, \_V]htg]`b`nU  
bYglfi \_h f]fUbYg][ bUYfB &\$( , I L!Df]`!` ]hj YbY'nU hYj Y'nU j a Ygb]`hfa ]bUg\_Y  
cdfYa Y

Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment interface

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST TBR 012 E1:2004  
<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

Ta slovenski standard je istoveten z: **TBR 012 Edition 1**

---

**ICS:**

33.040.50 Vodi, zveze in tokokrogi Lines, connections and circuits


**SIST TBR 012 E1:2004**

**en**

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 012 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

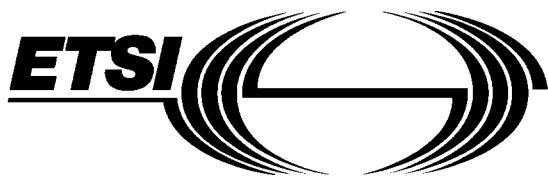

# TECHNICAL BASIS for REGULATION

---

**TBR 12**

December 1993

Source: ETSI TC-BT

Reference: DTBR/BT-02036

ICS: 33.040.40

**Key words:** ONP, leased lines, D2048U

**iTeh STANDARD PREVIEW**  
**Business Telecommunications (BT);**  
**Open Network Provision (ONP) technical requirements;**  
**2 048 kbit/s digital unstructured leased line (D2048U)**  
https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-  
 Attachment requirements for terminal equipment

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Page 2**

**TBR 012: December 1993**

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST TBR 012 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

## Contents

Foreword .....	5
Introduction .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions.....	7
4 Symbols and abbreviations.....	8
5 Requirements.....	8
5.1 Physical characteristics .....	8
5.2 Electrical characteristics .....	9
5.2.1 Output port.....	9
5.2.1.1 Signal coding.....	9
5.2.1.2 Waveform shape .....	9
5.2.1.3 Clock accuracy.....	10
5.2.1.4 Output jitter.....	11
5.2.2 Input port.....	12
5.3 Safety .....	12
5.4 Overvoltage protection.....	12
5.4.1 Impulse transfer from mains, common mode .....	12
5.4.2 Impulse transfer from mains, transverse mode .....	12
5.4.3 Conversion of common mode to transverse mode.....	12
5.5 Electro-magnetic compatibility.....	13
Annex A (normative):     Test methods .....	14
A.1 General .....	14
A.1.1 Equipment connection.....	14
A.1.2 Test environment.....	14
A.2 Test methods.....	15
A.2.1 Signal coding at output port.....	15
A.2.2 Waveform shape at output port .....	15
A.2.3 Clock accuracy at the output port .....	16
A.2.4 Jitter .....	17
Annex B (normative):     Definition of HDB3 code.....	19
B.1 General .....	19
B.2 Definition .....	19
Annex C (informative):     Bibliography.....	20
History .....	21

Blank page

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

SIST TBR 012 E1:2004  
<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

## Foreword

This Technical Basis for Regulation (TBR) has been produced by the Business Telecommunications (BT) Technical Committee of the European Telecommunications Standards Institute (ETSI) and was adopted after having passed through the ETSI standards approval procedure.

This TBR results from a mandate from the Commission of the European Community (CEC) to provide harmonised standards for the support of the Second Phase Directive (91/263/EEC).

This TBR is based on information from CCITT Recommendations and ETSI publications and the relevant documents are quoted where appropriate.

## Introduction

The Council Directive on the application of Open Network Provision (ONP) to leased lines (92/44/EEC), concerns the harmonisation of conditions for open and efficient access to, and use of, the leased lines provided on public telecommunications networks and the availability throughout the Community (EEC) of a minimum set of leased lines with harmonised technical characteristics.

The consequence of the Directive is that Telecommunications Organisations within the EEC shall make available a set of leased lines between points in these countries with specified connection characteristics and specified interfaces.

Two classes of standard will be used for the interfaces of terminal equipment designed for connection to the ONP leased lines. European Telecommunications Standards (ETSSs), which are voluntary, give the full technical specifications for these interfaces, whereas Technical Basis for Regulations (TBRs) give the essential requirements under the Second Phase Directive (91/263/EEC) for attachment to the leased lines. This TBR is a subset of the corresponding ETS 300 248 (1993).

CCITT Recommendation G.703 (1991), as qualified by ETS 300 166 (1993), is used as the basis for the terminal interface.

SIST TBR 012 E1:2004

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

Blank page

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST TBR 012 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

## 1 Scope

This TBR specifies the attachment requirements and corresponding test principles for a terminal equipment interface for connection to the network termination points of ONP 2 048 kbit/s digital unstructured leased lines using 120 ohm interfaces.

The term "attachment requirements" in the context of this TBR describes the essential requirements for access which have to be fulfilled under the Second Phase Directive (91/263/EEC). Conformance to these requirements does not guarantee end-to-end interoperability.

This TBR is applicable to all interfaces designed for connection to the ONP 2 048 kbit/s unstructured leased line. It covers the essential requirements for the physical and electrical characteristics of the terminal equipment interface.

Customer premises wiring and installation between the terminal equipment and the Network Termination Point (NTP) are outside the scope of this TBR.

## 2 Normative references

This TBR incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this TBR only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] CCITT Recommendation O.151 (1988), § 2.1: "Error performance measuring equipment for digital systems at the primary rate and above".  
*iTeb STANDARD PREVIEW*  
*(standards.iteb.ai)*
- [2] ETS 300 046-3 (1992). "Integrated Services Digital Network (ISDN); Primary rate access - safety and protection, Part 3: Interface I<sub>a</sub> - protection".  
*SIST TBR 012 E1:2004*
- [3] ISO/IEC 10173 (1991); "Information technology, Integrated Services Digital Network (ISDN) primary access connector at reference points S and T".  
*https://standardscatalogue.iteb.ai/iso-iec-10173-3bd*  
*SQLITE:SELECT \* FROM TBR\_012\_E1\_2004*

**NOTE:** This TBR also contains a number of informative references which have been included to indicate the sources from which various material has been derived, hence they do not have an associated normative reference number. Details of these publications are given in Annex C. In some cases the same publication may have been referenced in both a normative and an informative manner.

## 3 Definitions

For the purposes of this TBR, the following definitions apply:

**Leased lines:** the telecommunications facilities provided by a public telecommunications network that provide defined transmission characteristics between network termination points and that do not include switching functions that the user can control, (e.g. on-demand switching).

**Network Termination Point (NTP):** all physical connections and their technical access specifications which form part of the public telecommunications network and are necessary for access to, and efficient communication through, that public network.

**Safety Extra-Low Voltage (SELV) circuit:** a secondary circuit which is so designed and protected that under normal and single fault conditions the voltage between any two accessible parts, or between one accessible part and the equipment protective earthing terminal for a class I equipment, does not exceed a safe value (subclause 1.2.8.5 of EN 60950).

**Terminal Equipment (TE):** equipment intended to be connected to the public telecommunications network, i.e.:

- a) to be connected directly to the termination of a public telecommunication network; or
- b) to interwork with a public telecommunications network being connected directly or indirectly to the termination of a public telecommunications network,

in order to send, process, or receive information.

## 4 Symbols and abbreviations

For the purposes of this TBR, the following abbreviations apply:

AC	Alternating Current
D2048U	2 048 kbit/s digital unstructured ONP leased line
DC	Direct Current
EMC	Electro-Magnetic Compatibility
HDB3	High Density Bipolar code of order 3 (see Annex B)
ONP	Open Network Provision
PRBS( $2^{15}-1$ )	Pseudo Random Bit Sequence (as defined in § 2.1 of CCITT Recommendation O.151 [1])
RX	Receive (a signal input at either the terminal equipment interface or the test equipment)
TX	Transmit (a signal output at either the terminal equipment interface or the test equipment)
UI	Unit Interval

## 5 Requirements

### iTeh STANDARD PREVIEW

The 2 048 kbit/s unstructured leased line provides a bidirectional point-to-point digital leased line with a usable bit rate of 2 048 kbit/s where timing is not provided from the network. The provision of circuit timing is the responsibility of the user. No structuring of the data is provided by the network and any structuring is the responsibility of the user.

[SIST TBR 012 E1:2004](#)

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

#### 5.1 Physical characteristics

**Requirement:** The terminal equipment shall provide an 8-contact plug of the type specified in ISO/IEC 10173 [3] with contact assignments as specified in table 1. In addition, the terminal equipment may provide an alternative method of connection.

NOTE 1: The use of a shielded cord or cable may be necessary to meet radiation and immunity requirements defined in Electro-Magnetic Compatibility (EMC) standards.

NOTE 2: The alternative connection method is primarily for the purpose of permitting hardwired presentations of the leased line using insulation displacement terminals and wire with solid conductors having diameters in the range 0,4 to 0,6 mm.


**Test:** There shall be a visual inspection that the plug is of the correct type. The contact assignments are tested indirectly through the tests in Annex A.

**Table 1: Contact assignment**

Contact	Terminal interface
1 & 2	Receive pair
3	Shield reference point
4 & 5	Transmit pair
6	Shield reference point
7	Unused
8	Unused

NOTE 1: The transmit pair is the output from the terminal equipment interface. The receive pair is the input to the terminal equipment interface, as shown in figure 1. Where the terms "output" and "input" are used without qualification in this standard, they refer to the terminal equipment interface.

NOTE 2: For connection of the shield, or shields, to the common reference point at the NTP contacts 3 and 6 shall be used.

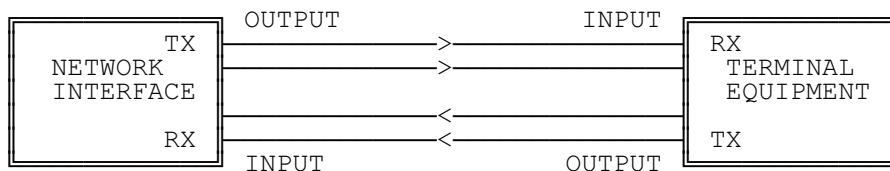

## iTeh STANDARD REVIEW

Figure 1

### 5.2 Electrical characteristics [standards.iteh.ai](https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004)

#### 5.2.1 Output port [SIST TBR 012 E1:2004](https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004>

##### 5.2.1.1 Signal coding [9c171e7f60e7/sist-tbr-012-e1-2004](https://standards.iteh.ai/catalog/standards/sist/33a8bb2a-b844-4ede-83bd-9c171e7f60e7/sist-tbr-012-e1-2004)

**Requirement:** Coding of the digital signal transmitted at the output port shall be in accordance with High Density Bipolar code of order 3 (HDB3) encoding rules (see Annex B).

**Test:** The test shall be conducted according to Annex A, subclause A.2.1.

##### 5.2.1.2 Waveform shape

**Requirement:** The pulse at the output port shall comply with the requirements given in table 2 and figure 2, based on CCITT Recommendation G.703.

**Test:** The test shall be conducted according to Annex A, subclause A.2.2.