



SLOVENSKI STANDARD

SIST ISO 7902-3:2002

01-marec-2002

<]XfcX]bUa] b]'fUX]U b]'Xfgb]'YyU]'nU bYdfY_]b'Ybc'cVfUc j Ub'Y!'JU'Ugh]'YyU]!' " XY.'8 cdi gfb]'cVfUc j U b]'dUfUa Yf]

Hydrodynamic plain journal bearings under steady-state conditions -- Circular cylindrical bearings -- Part 3: Permissible operational parameters

iTeh STANDARD PREVIEW

(standards.iteh.ai)
Paliers lisses hydrodynamiques radiaux fonctionnant en régime stabilisé -- Paliers circulaires cylindriques -- Partie 3: Paramètres opérationnels admissibles

[SIST ISO 7902-3:2002](https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-50639c631508/sist-iso-7902-3-2002)

Ta slovenski standard je istoveten z: **ISO 7902-3:1998**

ICS:

21.100.10	Drsni ležaji	Plain bearings
-----------	--------------	----------------

SIST ISO 7902-3:2002

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 7902-3:2002

<https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-30b39c631508/sist-iso-7902-3-2002>

INTERNATIONAL STANDARD

ISO
7902-3

First edition
1998-07-01

Hydrodynamic plain journal bearings under steady-state conditions — Circular cylindrical bearings —

Part 3: Permissible operational parameters

iTeh STANDARD PREVIEW

*Paliers lisses hydrodynamiques radiaux fonctionnant en régime stabilisé —
Paliers circulaires cylindriques —*

Partie 3: Paramètres opérationnels admissibles

SIST ISO 7902-3:2002

<https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-30b39c631508/sist-iso-7902-3-2002>



Reference number
ISO 7902-3:1998(E)

ISO 7902-3:1998(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 7902-3 was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 4, *Methods of calculation of plain bearings*.

ISO 7902 consists of the following parts, under the general title *Hydrodynamic plain journal bearings under steady-state conditions*—*Circular cylindrical bearings*:

- *Part 1: Calculation procedure*
- *Part 2: Functions used in the calculation procedure*
- *Part 3: Permissible operational parameters*

Annex A of this part of ISO 7902 is for information only.

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet central@iso.ch
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

Introduction

In order to attain sufficient operational reliability of circular cylindrical plain journal bearings when calculated in accordance with ISO 7902-1, it is essential that the calculated operational parameters h_{\min} , T_B or T_{ex} and \bar{p} do not lie above or below the permissible operational parameters h_{lim} , T_{lim} and \bar{p}_{lim} . The permissible parameters represent geometrically and technologically dependent operational limits within the plain bearing tribological system. They are empirical values which still enable sufficient operational reliability even for minor influences (see ISO 7902-1).

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 7902-3:2002

<https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-30b39c631508/sist-iso-7902-3-2002>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 7902-3:2002

<https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-30b39c631508/sist-iso-7902-3-2002>

Hydrodynamic plain journal bearings under steady-state conditions — Circular cylindrical bearings —

Part 3: Permissible operational parameters

1 Scope

This part of ISO 7902 specifies empirical permissible values for h_{lim} , T_{lim} and \bar{p}_{lim} .

The empirical values stated can be modified for certain applications, for example if information supplied by the manufacturer is to be taken into account. The descriptions of the symbols and calculation examples are given in ISO 7902-1.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this part of ISO 7902. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this part of ISO 7902 are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 7902-1:1998, *Hydrodynamic plain journal bearings under steady-state conditions — Circular cylindrical bearings — Part 1: Calculation procedure*.

3 Operational parameters to avoid wear

3.1 The aim of keeping above the minimum permissible lubrication film thickness h_{lim} is to retain complete lubrication of the plain bearing in order to attain least possible wear and low susceptibility to faults. The lubricant should be free of contaminating particles, otherwise increased wear, scoring and local overheating can result, thus impairing correct functioning of the plain bearing. If necessary, appropriate filtering of the lubricant should be provided for.

3.2 The minimum permissible lubrication film thickness h_{lim} , as a characteristic parameter for the transition to mixed friction (see ISO 7902-1:1998, 6.6), can be determined from the following equation:

$$h_{lim} = Rz_B + Rz_J + \frac{1}{2}By + \frac{1}{2}y + h_{wav,eff} \quad \dots (1)$$

This takes into account

- the sum of the mean peak-to-valley heights of bearing and shaft at the ideal location (line X-X) [$R_{zB} + R_{zJ}$]
- the misalignment (line Y-Y) within the bearing length [$1/2 B y$]
- the mean deflection (line Z-Z) [$1/2 y$]

3.3 If wavy geometrical deviations occur in the sliding surfaces (bearing or shaft) in the circumferential direction, they are taken into account during the determination of h_{lim} by the effective waviness $h_{wav,eff}$ for the most unfavourable shaft position. In this case, $h_{wav,eff}$ is the effective waviness of the bearing under static loading or the effective waviness of the shaft under rotating loading, respectively.

The effective waviness $h_{wav,eff}$ and the maximum permissible effective waviness $h_{wav,eff,lim}$ at a given operating point (ε or h_{lim}) can be determined using figure 2 if roughnesses, deformations and tilt positions are known.

3.4 In accordance with equation (1), the following applies:

$$h_{lim} = m + h_{wav,eff}$$

where

$$m = R_{zB} + R_{zJ} + \frac{1}{2} B y + \frac{1}{2} y$$

$$h_{wav,eff} = \frac{E}{G} a$$

iTeh STANDARD PREVIEW
(standards.iteh.ai)

With a given minimum lubricant film thickness h_{min} the maximum permissible effective waviness amplitude is determined from

$$h_{wav,eff,lim} = h_{min} - m$$

The maximum permissible absolute waviness, $h_{wav,eff,lim}$, is determined from

$$h_{wav,lim} = \frac{G}{E} h_{wav,eff,lim}$$

3.5 An example of the determination of $h_{wav,eff}$, h_{lim} , $h_{wav,eff,lim}$ and $h_{wav,lim}$ (from figure 2) is as follows.

Given quantities:

$$B/D = 0,5$$

$$C/2 = 85 \times 10^{-6} \text{ m}$$

$$m = 6 \times 10^{-6} \text{ m}$$

$$h_{wav} = 5 \times 10^{-6} \text{ m}$$

$$i = 6$$

$$h_{min} = 8,5 \times 10^{-6} \text{ m}$$

$$\varepsilon = 1 - \frac{h_{min}}{C/2} = 0,9$$

With $B/D = 0,5$, figure 2 gives $E = 0,86$.

With $i = 6$ and $\varepsilon = 0,9$, figure 2 gives $G = 1,85$.

Hence

$$h_{\text{wav,eff}} = \frac{0,86}{1,85} \times 5 \times 10^{-6} \text{ m} = 2,32 \times 10^{-6} \text{ m}$$

and

$$h_{\text{lim}} = 6 \times 10^{-6} \text{ m} + 2,32 \times 10^{-6} \text{ m} = 8,32 \times 10^{-6} \text{ m}$$

Since $h_{\text{min}} > h_{\text{lim}}$, $h_{\text{min}} = 8,5 \times 10^{-6} \text{ m}$ is permissible.

$$h_{\text{wav,eff,lim}} = 8,5 \times 10^{-6} \text{ m} - 6 \times 10^{-6} \text{ m} = 2,5 \times 10^{-6} \text{ m}$$

$$h_{\text{wav,lim}} = \frac{1,85}{0,86} \times 2,5 \times 10^{-6} \text{ m} = 5,38 \times 10^{-6} \text{ m}$$

3.6 In general, deviations of form are irregular. For the determination of $h_{\text{wav,eff}}$, the waves in the sliding surface area under load are significant.

For running-in processes under low load and sliding velocity, it is possible to allow a lower minimum film thickness owing to the smoothing and adjusting of the sliding surfaces. If necessary, a bearing material having a good running-in ability shall be used.

Table 1 gives empirical permissible values for h_{lim} , in which a mean peak-to-valley height of $R_{zJ} \leq 4 \mu\text{m}$ for the shaft, minor geometrical errors of the sliding surfaces, careful assembly and adequate filtering of the lubricant are assumed.

<https://standards.iteh.ai/catalog/standards/sist/637c45cd-1981-44f8-8467-30b39c631508/sist-iso-7902-3-2002>

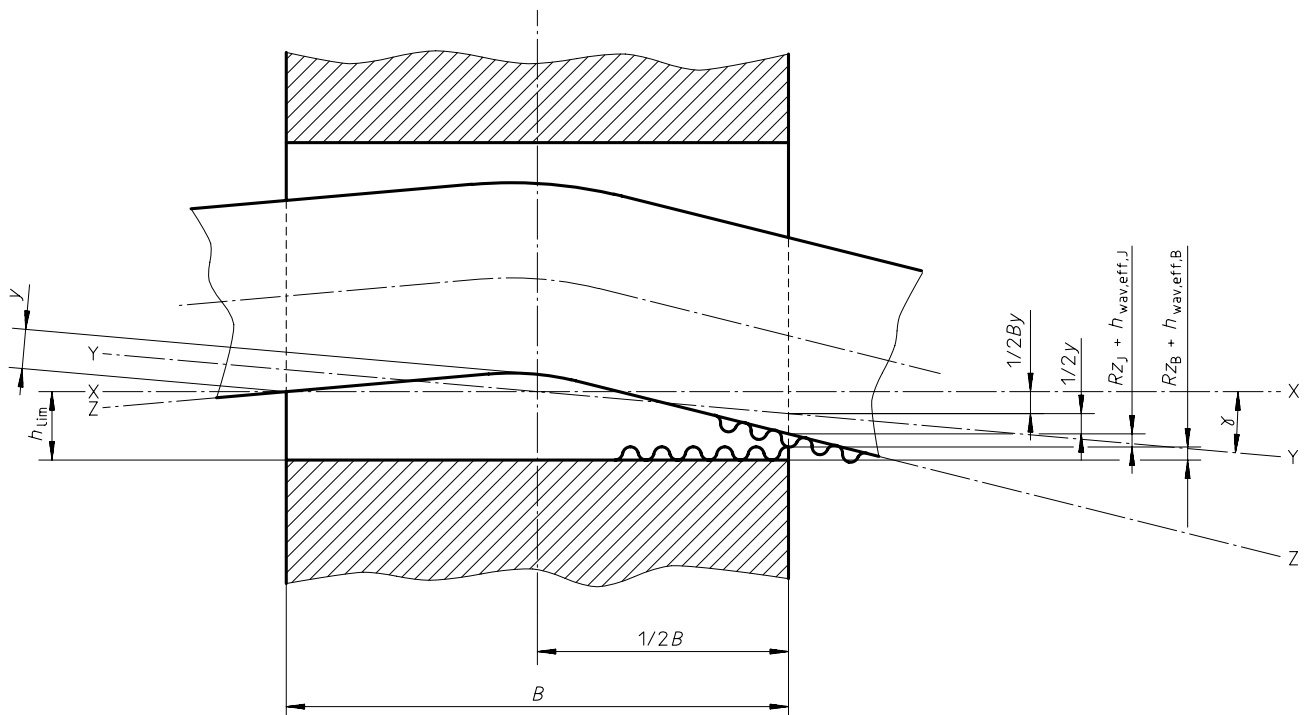


Figure 1 — Minimum permissible lubrication film thickness when no running-in process is allowed