



Designation: D 6699 – 01

Standard Practice for Sampling Liquids Using Bailers¹

This standard is issued under the fixed designation D 6699; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This practice covers the procedure for sampling stratified or un-stratified waters and liquid waste using bailers.

1.2 Three specific bailers are discussed in this practice. The bailers are the single and double check valve and differential pressure.

1.3 This standard does not cover all of the bailing devices available to the user. The bailers chosen for this practice are typical of those commercially available.

1.4 This practice should be used in conjunction with Guide D 4687, Practice D 5088, and Practice D 5283.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

- D 4448 Guide to Sampling Ground Water Wells
- D 4687 Guide for General Planning of Sampling
- D 4750 Test Method for Determining Subsurface Liquid Levels in a Borehole or Monitoring Well (Observation Well)
- D 5088 Practice for Decontamination of Field Equipment Used at Nonradioactive Waste Sites
- D 5283 Practice for Generation of Environmental Data Related to Waste Management Activities: Quality Assurance and Quality Control Planning and Implementation
- D 5681 Terminology for Waste and Waste Management
- D 5792 Practice for Generation of Environmental Data Related to Waste Management Activities: Development of Data Quality Objectives
- D 6051 Guide for Composite Sampling and Field Subsampling for Environmental Waste Management Activities

¹ This practice is under the jurisdiction of ASTM Committee D34 on Waste Management and is the direct responsibility of Subcommittee D34.01.03 on Sampling Equipment.

Current edition approved Aug. 10, 2001. Published November 2001.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

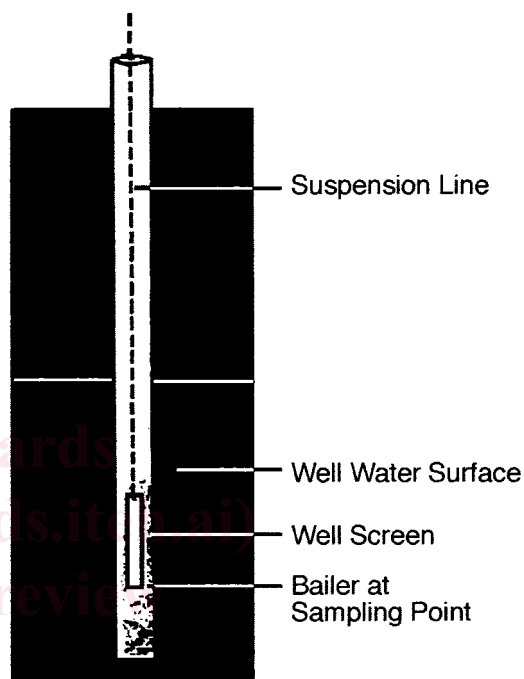


FIG. 1 Bailer Sampling a Screened Well

- D 6232 Guide for Selection of Sampling Equipment for Waste and Contaminated Media Data Collection Activities
 - D 6452 Guide for Purging Methods for Wells Used for Ground-Water Quality Investigations
 - D 6517 Guide for Field Preservation of Ground-Water Samples
 - D 6564 Guide for Field Filtration of Ground-Water Samples
 - D 6634 Guide for the Selection of Purging and Sampling Devices for Ground-Water Monitoring Wells
- 2.2 *EPA Standard:*
EPA SW 486 RCRA Samples

3. Terminology

- 3.1 See Terminology D 5681.

4. Summary of Practice

- 4.1 A clean bailer is lowered into the liquid to be sampled using a suspension line (see Fig. 1). The bailer chamber is

allowed to fill with the sample. The check valve or valves on bailers close when the bailer stops. The bailer is raised to the surface where the sample is discharged into a clean sample confiner.

5. Significance and Use

5.1 A bailer is a device for obtaining a sample from stratified or un-stratified waters and liquid wastes. The most common use of a bailer is for sampling ground water from single-screened wells (Fig. 1) and well clusters (see Guide D 4448).

5.2 This practice is applicable to sampling water and liquid wastes. The sampling procedure will depend on sampling plan and the data quality objectives (DQOs) (Practice D 5792).

5.3 Bailers may be used to purge ground water wells prior to sampling, but bailers are poor devices for removing large volumes of water.

5.4 Bailers may be used to sample waters and liquid wastes in underground and above ground tanks and surface impoundments. However, the design of the unit and associated piping should be well understood so that the bailer can access the desired compartment and depth. Any stratification of the liquid should be identified prior to sampling.

NOTE 1—Viscous liquids and suspended solids may interfere with a bailer's designed operation.

5.5 Bailers do not subject the sample to pressure extremes. Bailing does disturb the water column and may cause changes to the parameters to be measured (for example, turbidity, gases, etc.).

6. Sampling Equipment

6.1 Bailers are versatile devices constructed in different sizes and from a variety of materials. Some bailers are designed using a threaded section that allows the user to change the volume of the bailer by connecting additional sections. When sampling for volatile organic compounds (VOCs) in liquids, specialized bailers that have a sample control or a draft valve near the bottom of the bailer are used. The control valve allows a sample to be drained from the bailer with minimal loss of volatile compounds.

6.2 Three general types of bailers are a single check valve bailer, a double check valve bailer, and a differential pressure bailer (hydrostatic pressure allows the bailer to fill through the lower tube and release displaced air through the upper tube). Advantages and limitations of bailers are found in Guides D 6232 and D 6634. A description of the equipment and the advantages and limitations of bailers in general and specific limitations of the single and double check valve bailers and the differential pressure bailer are as follows:

6.2.1 General Description and Advantages and Limitations of Bailers:

6.2.1.1 Bailers are available commercially in different lengths, volumes, and check valve density and sample release arrangements. They are typically constructed of PTFE, polyvinyl chloride (PVC), stainless steel, and polyethylene (single use disposable bailer).

6.2.1.2 General advantages and limitations of bailers are listed in Table 1.

TABLE 1 General Advantages and Limitations of Bailers

Advantages	Limitations
Simple to use Some have a low initial cost Can be made almost any size	Time consuming to use Valves may leak Tend to expose sample to the atmosphere
Can be constructed of a variety of materials No external power source needed	May result in sample contamination Bailers are not suitable for sampling thin surface layers like thin layers of light non-aqueous phase liquids

6.2.2 Single Valve Bailer (Fig. 2):

6.2.2.1 A single check valve bailer is a length of tubing with a check valve in the bottom. The bottom valve allows the bailer to fill and retain the sample.

6.2.2.2 The bottom-emptying bailers with controlled flow valves (Fig. 3) are used for collecting samples for volatile organic analyses.

6.2.2.3 *Advantages*—Low initial cost, and it is mechanically simple.

6.2.2.4 *Limitations*—Applicable to surface sampling only, disturbs the sample, and exposes the samples to the atmosphere.

6.2.3 Double Valve Bailers (Fig. 4):

6.2.3.1 A double check valve bailer has an additional check valve at the top of the body that allows sampling at a specific depth. As the bailer is lowered through the liquid column, the liquid flows through the bailer until the sampling level is reached. At the sampling point, the two check valves close to contain the sample. Because the difference between each ball and check valve seat is the same, both check valves close simultaneously upon retrieval. The valve from the valve seat is maintained by a pin that blocks vertical movement of the check ball. A drainage pin is placed into the bottom of the bailer to drain the sample directly into a sample bottle.

6.2.3.2 *Advantage*—It can sample at any point in a liquid column.

6.2.3.3 *Limitation*—It can become contaminated with the overlaying material as the sampler approaches the targeted sampling point.

6.2.4 Differential Pressure Bailer (Fig. 5):

6.2.4.1 The differential pressure bailer is a canister with two small diameter tubes of different heights built into the removable top. It is usually made from stainless steel to provide sufficient weight to allow it to be lowered rapidly to the desired sampling depth. Once the bailer is stopped, hydrostatic pressure allows the bailer to fill through the lower tube at the same time as air is displaced through the upper tube.

6.2.4.2 *Advantages*—There is a minimal cross contamination from the matrix so samples are more likely to be representative at depth. They are good for sampling for VOCs because they minimize contact with air.

6.2.4.3 *Limitations*—Difficulty of cleaning the equipment, high cost due to the complexity of the device, relative small sample size compared to other bailers, the required rapid lowering of the bailer may disturb the sample matrix, and cross contamination from potential leakage of the upper liquid layers into the bailer during descent.