



Edition 1.0 2007-09

INTERNATIONAL STANDARD

Multimedia home networks – Home network communication protocol over IP for multimedia household appliances

Document Preview

IEC 62457:2007

https://standards.iteh.ai/catalog/standards/iec/867ae9f4-b6e2-439b-9a37-77715f8cf2ef/iec-62457-2007





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland Email: inmail@iec.ch Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Catalogue of IEC publications: <u>www.iec.ch/searchpub</u>

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

IEC Just Published: <u>www.iec.ch/online_news/justpub</u>

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

 Customer Service Centre: <u>www.iec.ch/webstore/custserv</u>
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11ai/catalog/standards/iec/867ae914-b6e2-439b-9a37-7771518c(2et/iec-62457-2007 Fax: +41 22 919 03 00





Edition 1.0 2007-09

INTERNATIONAL STANDARD

Multimedia home networks – Home network communication protocol over IP for multimedia household appliances

Document Preview

IEC 62457:2007

https://standards.iteh.ai/catalog/standards/iec/867ae9f4-b6e2-439b-9a37-77715f8cf2ef/iec-62457-2007

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE XB

ICS 33.040; 33.160.01

ISBN 2-8318-9306-2

CONTENTS

	OREWORD				
INT	RODU	JCTION		8	
1	Seen	•		10	
1					
2			ference		
3			itions and abbreviations		
	3.1		and definitions		
	3.2		viations		
4			face and requirements		
	4.1		ew		
	4.2	•	gy		
	4.3		terface		
	4.4		format of Home Network frame		
		4.4.1	General		
		4.4.2	Home Network transmission frame transfer		
		4.4.3	MAC/IP address resolution request/response		
		4.4.4	IP/MAC address resolution request/response		
		4.4.5	Hardware/MAC address resolution request/response		
		4.4.6 4.4.7	MAC address initialization request/response MAC address server initialization response/MAC address allocation	25	
		4.4.7	response	26	
		4.4.8	MAC address confirmation request/response	27	
		4.4.9	MAC address request to all nodes/response	28	
		4.4.10	MAC address server detection request/response, MAC address server notification	29	
		4.4.11	Network control message (destination invalid)	30	
			Network control message (NMa overlap)		
	4.5	Basic o	communication sequences	32	
		4.5.1	General	32	
		4.5.2	MAC/IP address resolution request/response (resolution of the NMa into the IP address)	32	
		4.5.3	IP/MAC address resolution request/response (resolution of IP address into NMa)	33	
		4.5.4	Hardware/MAC address resolution request/response		
		4.5.5	MAC address request/response to all nodes		
		4.5.6	Network control message (destination invalid)	37	
		4.5.7	Special case pertaining to packets with invalid destination values	38	
		4.5.8	Network control message (NMa overlap)	39	
	4.6	NMa a	cquisition booting sequence	40	
		4.6.1	Overview of NMa acquisition booting sequence	40	
		4.6.2	Overview of the processing after acquisition of IP Address	40	
		4.6.3	Booting node	41	
		4.6.4	MAC address server		
		4.6.5	Operating nodes		
	4.7		ddress server		
		4.7.1	Requirement of MAC address server		
		4.7.2	Processing sequence for MAC address server booting	47	

				10
	4.0		Processing by operating MAC address server	
	4.8 4.9	•	eriod parameterson for updating data after NMa acquisition	
5			equirements	
0	5.1			
	5.1	5.1.1	Protocols to be used	
		5.1.2	IP Address	
		5.1.3	Multicast address	
		5.1.4	DHCP	
		5.1.5	Method for obtaining IP Address by manual setting, etc	
		5.1.6	Routing	52
	5.2	UDP		52
		5.2.1	Protocols to be used	52
		5.2.2	Port Number	52
6	Low	er-layer r	medium-specific interface and requirements	52
	6.1	Interfac	ce and requirements on lower-layer medium	52
	6.2	Softwar	re internal status transition	
		6.2.1	Overview	
		6.2.2	Stop status	
		6.2.3	Cold start status	-
		6.2.4	Warm start status	
		6.2.5	Communication suspension status	
		6.2.6 6.2.7	Normal operation status	
		6.2.7	Error stop status	
		0.2.0		
			ative) Basic booting sequence 57:2007	
An	nex B	(informa	ative) Basic MAC address server booting sequence	
An	nex C	(normati	ive) Requirements on IEEE 802.15.1	68
Fig	jure 1	– Group	ing of relationship between household appliances and audiovisual and PC-related equipment	
		Evem		
2110			oles of data communication between household appliance and	0
	diovis	ual equip	oment, PCs and PC-related equipment	
Fig	diovis jure 3	ual equip – The co	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions	10
Fig Fig	diovis jure 3 jure 4	ual equip – The co – Encap	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions sulation of Home Network frame	10 16
Fig Fig Fig	diovis jure 3 jure 4 jure 5	ual equip – The co – Encap – Examp	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges	10 16 17
Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6	ual equip – The co – Encap – Examp – Examp	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers	10 16 17 17
Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6 jure 7	ual equip – The cc – Encap – Examp – Examp – Relatio	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers onship between IP subnet and Home Network subnet	10 16 17 17 18
Fig Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6 jure 7 jure 8	ual equip – The co – Encap – Examp – Examp – Relatio – Home	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers onship between IP subnet and Home Network subnet Network frame packet format	10 16 17 17 18 19
Fig Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6 jure 7 jure 8 jure 9	ual equip – The co – Encap – Examp – Examp – Relatio – Home – Notatio	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers onship between IP subnet and Home Network subnet Network frame packet format on for bits in the flag field	10 16 17 17 18 19 21
Fig Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6 jure 7 jure 8 jure 9	ual equip – The co – Encap – Examp – Examp – Relatio – Home – Notatio	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers onship between IP subnet and Home Network subnet Network frame packet format	10 16 17 17 18 19 21
Fig Fig Fig Fig Fig Fig Fig	diovis jure 3 jure 4 jure 5 jure 6 jure 7 jure 8 jure 9 jure 1	ual equip – The cc – Encap – Examp – Examp – Relatio – Home – Notatio D – IEEE	oment, PCs and PC-related equipment omposition of the Home Network layer and the specified portions osulation of Home Network frame ole of a subnet using Layer 2 bridges ole of a subnet connection using Home Network routers onship between IP subnet and Home Network subnet Network frame packet format on for bits in the flag field	10 16 17 17 18 19 21

Figure 13 – Basic Hardware/MAC address resolution sequence	35
Figure 14 – Basic "MAC address request/response to all nodes" sequence	37
Figure 15 – Basic "destination invalid" processing sequence	38
Figure 16 – Basic sequence for handling detected NMa overlap	39
Figure 17 – Flowchart for determining provisional NMa to be used	42
Figure 18 – Check for NMas in use by other nodes	43
Figure 19 – Example of duplicated provisional NMa	44
Figure 20 – Format for UsedMAC	46
Figure 21 – Example of UsedMAC	46
Figure 22 – Internal software status transitions	53
Figure A.1 – A-MODE booting, NMas not retained (with MAC address server)	60
Figure A.2 – SR-MODE booting, NMas not retained (with MAC address server)	61
Figure A.3 – A-MODE booting, NMas not retained (without MAC address server)	62
Figure A.4 – SR-MODE booting, NMas not retained (without MAC address server)	63
Figure A.5 – A-MODE booting, NMas retained (with MAC address server)	64
Figure A.6 – A-MODE booting, NMas retained (without MAC address server)	65
Figure B.1 – Booting of a single MAC address server	66
Figure B.2 – Near-simultaneous booting of two or more MAC address servers	67
Figure C.1 – Layer structure	68
Figure C.2 – Basic form of subnet.	
Figure C.3 – Example of a subnet connection using Home Network routers	
Figure C.4 – Example of an unacceptable subnet connection (scatternet)	70
Figure C.5 – Example of a connection using a home network gateway	70
Figure C.6 – Example of a subnet using Layer 2 bridges	71
Figure C.7 – Examples of Home Network communication software implementation	72
Figure C.8 – Packet structure	73
Table 1 – Packet type numbers of the Home Network frame	20
Table 2 – Hardware type	20
Table 3 – Format for "Home Network transmission frame transfer" packets	22
Table 4 – Format for "MAC/IP address resolution request" packets	22
Table 5 – Format for "MAC/IP address resolution response" packets	23
Table 6 – Format for "IP/MAC address resolution request" packets	23
Table 7 – Format for "IP/MAC address resolution response" packets	24
Table 8 – Format for "hardware/MAC address resolution request" packets	24
Table 9 – Format for "hardware/MAC address resolution response" packets	25
Table 10 – Format for "MAC address initialization request" packets	26
Table 11 – Format for "MAC address initialization response" packets	26
Table 12 – Format for "MAC address server initialization response" packets	27
Table 13 – Format for "MAC address allocation response" packets	27
Table 14 – Format for "MAC address confirmation request" packets	28
Table 15 – Format for "MAC address confirmation response" packets	28
Table 16 – Format for " MAC address request to all nodes" packets	28

- 4 -

Table 17 – Format for "MAC address response to all nodes" packets	29
Table 18 – Format for "MAC address server detection request" packets	29
Table 19 – Format for "MAC address server notification" packets	30
Table 20 – Format for "MAC address server detection response" packets	30
Table 21 – Format for "network control message (destination invalid)" packets	31
Table 22 – Format for "NMa overlap" network control message packets	31
Table 23 – Address Relation table	32
Table 24 – Booting modes	40
Table 25 – Sample for storing allocated NMas	48
Table 26 – Time period parameters	50

iTeh Standards (https://standards.iteh.ai) Document Preview

IEC 62457:2007

https://standards.iteh.ai/catalog/standards/iec/867ae9f4-b6e2-439b-9a37-77715f8cf2ef/iec-62457-2007

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MULTIMEDIA HOME NETWORKS – HOME NETWORK COMMUNICATION PROTOCOL OVER IP FOR MULTIMEDIA HOUSEHOLD APPLIANCES

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.

7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and

- members of its technical committees and IEC National Committees for any personal injury, property damage of other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62457 has been prepared by technical area 9: Audio, video and multimedia applications for end-user network, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

CDV	Report on voting
100/1197/CDV	100/1271/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh Standards (https://standards.iteh.ai) Document Preview

IEC 62457:2007

https://standards.iteh.ai/catalog/standards/iec/867ae9f4-b6e2-439b-9a37-77715f8cf2ef/iec-62457-2007

INTRODUCTION

By enabling standalone-type household appliances (household appliances other than audiovisual equipment, PCs and PC-related equipment) such as white appliances (e.g. air conditioners, refrigerators), sensors, health, exercise and fitness equipment to connect to and work in conjunction with audiovisual equipment, PCs and/or PC-related equipment, it becomes possible to deliver multimedia application services, such as displaying a "washing completed" message of a washing machine on a TV screen or operating an air conditioner via a TV screen, that otherwise would not be possible (see Figure 1).

To achieve these services, a home network standard for networks of standalone-type household appliances and network standards for audiovisual equipment, PCs and PC-related equipment are needed. It is also necessary to establish a system that allows equipment belonging to a network to exchange data with other equipment of different types of networks. A commonly used approach to allow networks of different types to exchange data with each other is to use Gateways.

Because data transferred within, into and out of networks of standalone-type household appliances are control data, which are much smaller in volume than data similarly transferred for networks of audiovisual equipment, PCs and PC-related equipment, and because standalone-type household appliances have longer service lives than audiovisual equipment, PCs and PC-related equipment, home network standards for networks of standalone-type household appliances have been established separately from network standards for audiovisual equipment, PCs and PC-related equipment, standards for audiovisual equipment, PCs and PC-related equipment, and many different protocol standards have been in use for a long time in different countries¹).


On the other hand, recent advances in device and software technology have made it possible to implement TCP/IP (which has been adopted worldwide for audiovisual equipment, PCs and PC-related equipment) in certain standalone-type household appliances, and so establishing a home network standard for networks of standalone-type household appliances in the form of a standard for layers above TCP/IP would allow data to be directly exchanged between household appliances and audiovisual equipment, PCs and PC-related equipment via TCP/IP (see Figure 2 example1, example2). In turn, this would allow the creation of multimedia application services that enable household appliances to work in conjunction with audiovisual equipment.


The advantages of applying this standard are:

- it can be applied to many types of Home Network standards.
- both Home Network nodes with TCP/IP Layer and without can coexist under the same Home Network middleware.
- Household appliances can communicate with audiovisual equipment, PCs and PC-related equipment, and vice versa, without requiring any gateway.
- Household appliances can handle text and audiovisual data.
- Audiovisual equipment, PCs and PC-related equipment can handle Household appliances data.
- Household appliances can freely select a suitable lower-layer medium from various lowerlayer media below TCP/IP.

^{. . .}

- 9 -

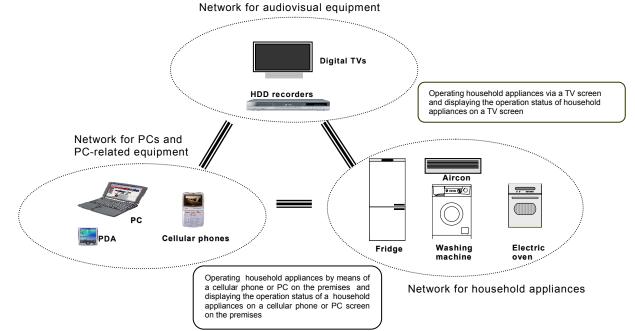




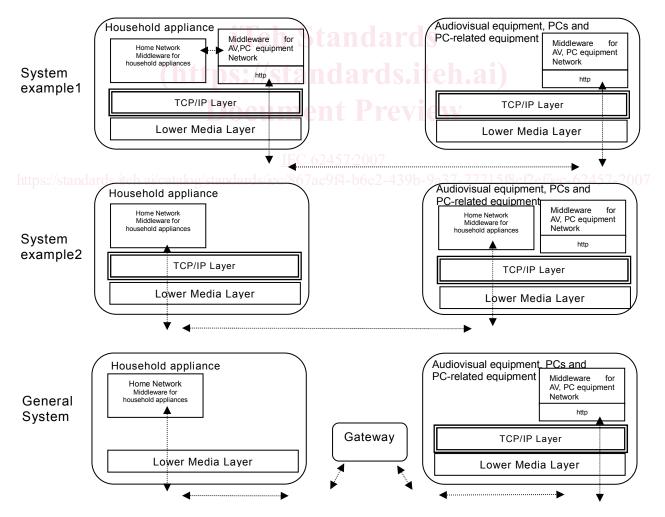


Figure 2 – Examples of data communication between household appliance and audiovisual equipment, PCs and PC-related equipment

MULTIMEDIA HOME NETWORKS – HOME NETWORK COMMUNICATION PROTOCOL OVER IP FOR MULTIMEDIA HOUSEHOLD APPLIANCES

1 Scope

This International Standard specifies the requirements for the interface between the Home Network Lower Layer for a country's home network of standalone-type household appliances and the TCP/IP Layer for cases where it is intended to introduce a TCP/IP Layer to each of the nodes comprising such home network of standalone-type household appliances. The specified interface in the Home Network Lower Layer consists of 2 portions, the TCP/IP Interface and the lower medium-specific Interface. Figure 3 shows the composition of the Home Network Layer and the standardized portions. In Annex C, this standard specifies the requirements for the lower medium-specific Interface One of these layers shall be IEEE 802.15.1, short-distance radio standard additional layers can be added in the future).

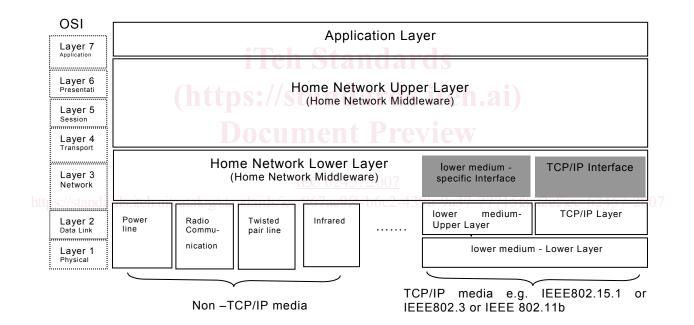

NOTE 1 Grey coloured portions are standardized.

NOTE 2 TCP/IP Interface is the same even if the lower medium is different, however the lower medium-specific Interface is different.

NOTE 3 Home Network Lower Layer and Home Network Upper Layer are prepared for CEBus, ECHONET, Konnex, LonTalk, others respectively.

NOTE 4 Each OSI Layer is roughly mapped to each Home Network Layer.

Figure 3 – The composition of the Home Network layer and the specified portions

2 Normative reference

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEEE Std 802.15.1-2005, *IEEE Standard for Information technology* – *Telecommunications and information exchange between systems* – *Local and metropolitan area networks* – *Specific requirements* – *Part 15.1: Wireless medium access control (MAC) and physical layer (PHY) specifications for wireless personal area networks (WPANs)*

3 Terms, definitions and abbreviations

For the purposes of this document, the following terms and definitions apply.

3.1 Terms and definitions

3.1.1

Bluetooth

wireless technology that is a worldwide specification for a small-form factor, low-cost radio solution providing links between mobile computers, mobile phones, other portable handheld devices, and connectivity to the Internet

NOTE The specification is developed, published and promoted by the Bluetooth Special Interest Group (SIG). Main specifications are adopted as IEEE Std 802.15.1. In this standard, Bluetooth means IEEE 802.15.1.

3.1.2

Bluetooth Network Encapsulation Protocol

BNEP protocol specified in Bluetooth. IP packet is encapsulated according to this protocol

3.1.3

<u>EC 62457:2007</u>

cold start method for starting the Home Network node by starting initial setting processing while abandoning previous information related to network addresses

3.1.4 Group ad-hoc Networks

GN

Piconet which comprises a master and a slave as defined in IEEE 802.15.1 and which is not connected to any outside network or node

3.1.5 Hardware address

На

address based on a medium-specific addressing scheme

3.1.6

Home Network

generic name for various equipment-type Home Network standards mainly for household appliances

NOTE Specifically, it refers to CEBus, Konnex, ECHONET, LonTalk, etc.

3.1.7

Home Network device

a home device, home electric product, or building/store device, such as lighting, air conditioning, refrigeration, power equipment, ordinary home appliances, sensors, actuators, etc.

NOTE A Home Network node provided with a communication interface and system compatible function conforming to the Home Network standard. A Home Network node provided with a controller function for the centralized control unit with functions to monitor, control, and operate them or an operating unit (remote control, etc.).

3.1.8

Home Network domain

a range on the network within which information transmission is logically guaranteed by the Home Network

NOTE Property and security control, including homes and stores, are generally thought to use the same range as a domain, but the domain is not limited by any standard.

3.1.9

Home Network frame

frame which is generated in the Home Network lower layer as specified in this standard;. the frame consists of a Home Network transmission frame or an associated managing packet

3.1.10

Home Network gateway

a Home Network node which connects a home network domain to an external system (including other Home Network domains)

NOTE Multiple Home Network gateways may exist in the domain depending on differences in the external system(s) to be connected.

3.1.11

Home Network lower-layer

interface between Home Network upper layer and the lower medium upper-layer

NOTE Some parts depend on the medium characteristics. This standard is contained in this layer. This layer mainly consists of OSI Layer 3, 4, and 2.

3.1.12

Home Network master router

a router that acquires a Net ID at the time of initialization and stores it; there is one Home Network master router in each Home Network subnet

3.1.13

Home Network node

communication node conforming to a Home Network standard, referred to as "node" herein unless otherwise specified

NOTE In a Home Network, a Home Network node is a Home Network communication function which is uniquely identified by a Network address. There is no distinction between the application functions of nodes. The term node is used to describe the function of one communication terminal of the Home Network.

3.1.14

Home Network router

a Home Network node used to connect Home Network subnets

NOTE A Home Network router connects the subnets of different lower-layer communication protocols (for different protocols, regardless of transmission media type) or divides the same protocol into subnets. The lower-layer communication protocol is connected seamlessly on the system using routing processing based on Network addresses as a function.

3.1.15

Home Network subnet

a group of nodes in the Home Network domain, using the same media or different media connected by layer 2 bridges, referred to as a "subnet" herein unless otherwise specified

NOTE Each subnet has a Net ID. Different subnets can be connected by a Home Network router.