INTERNATIONAL STANDARD

ISO 7995

Second edition 1988-12-15



INTERNATIONAL ORGANIZATION FOR STANDARDIZATION ORGANISATION INTERNATIONALE DE NORMALISATION МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ

Aerospace — Nuts, hexagonal, self-locking, with MJ threads, coated or uncoated, classification 1 100 MPa/235 °C, 1 100 MPa/315 °C or 1 100 MPa/425 °C — Dimensions iTeh STANDARD PREVIEW

Aéronautique et espace — Écrous hexagonaux à freinage interne, à filetage MJ, revêtus ou non revêtus, de classification 1 100 MPa/235 °C, 1 100 MPa/315 °C ou 1 100 MPa/425 °C — Dimensions

https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-789c23ff1002/iso-7995-1988

ISO 7995 : 1988 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

(standards.iteh.ai)

International Standard ISO 7995 was prepared by Technical Committee ISO/TC 20, Aircraft and space vehicles. ISO 7995:1988

https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-

This second edition cancels and replaces the first edition (ISO 7995): 1985), of which it constitutes a technical revision.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

ISO 7995 : 1988 (E)

Aerospace — Nuts, hexagonal, self-locking, with MJ threads, coated or uncoated, classification 1 100 MPa/235 °C, 1 100 MPa/315 °C or 1 100 MPa/425 °C — Dimensions

iTeh STANDARD PREVIEW

0 Introduction

(standards.iteh.ai)

2 Field of application

The dimensions laid down in this International Standard have been specified so as to satisfy the requirements laid down in ISO 5858.

This International Standard is intended solely for the drawing up of product standards appropriate for aerospace use.

https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-

789c23ff1002/iso-7995-1988

1 Scope

This International Standard lays down the dimensions for hexagonal nuts, with MJ threads, coated or uncoated, a selflocking feature achieved by forming the upper portion out-ofround and with a classification of

- 1 100 MPa/235 °C; or
- 1 100 MPa/315 °C; or
- 1 100 MPa/425 °C.

3 References

ISO 5855-2, Aerospace construction — MJ threads — Part 2: Limit dimensions for bolts and nuts.

ISO 5858, Aerospace — Self-locking nuts with maximum operating temperature less than or equal to 425 °C — Procurement specification.¹⁾

ISO 8788, Aerospace — Fasteners — Tolerances of form and position for nuts.


1

¹⁾ At present at the stage of draft.

ISO 7995: 1988 (E)

4 Configuration and dimensions

See the figure and the table. Dimensions are expressed in millimetres.

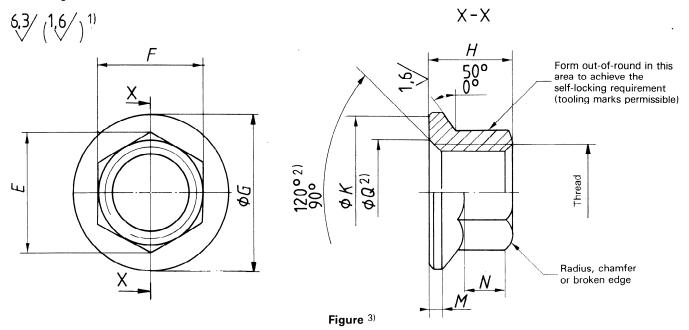

iTeh STANDARD PREVIEW

(standards, iteh.ai)

Size code	Thread 7)	E ⁸⁾	F ⁸⁾		G	Н	K	M	N ₉)	Q	
		min.		ISO 79	max ₈₈	max.	min.	min.	min.	max.	min.
030	MJ 3×0,5 — 4H6H//sta	nda l as.it	eh.a f cata	alog/stand	lards/sist/	7b3af6e	7-c 5/2 1-4	10 8 6487f	_ 1,2	3,8	3,2
040	MJ 4×0,7 — 4H6H	5,3	1	23ff1002	/iso-,7995	-1988	6,7	0,5	1,5	4,8	4,2
050	MJ 5×0,8 – 4H6H	6,5	6	h12	9,1	5	8,3	0,6	2	5,8	5,2
060	MJ 6×1 — 4H5H	7,6	7		10,6	5,4	9,8	0,7	2,3	7,1	6,3
070	MJ 7×1 — 4H5H	8,7	8		12,1	6,3	11,3	0,8	2,7	8,1	7,3
080	MJ 8×1 – 4H5H	10,9	10		13,6	7,2	12,8	0,9	3,2	9,1	8,3
100	MJ10 × 1,25 — 4H5H	13,2	12	h13	16,8	9	15,8	1,1	3,8	11,1	10,3
120	MJ12×1,25 — 4H5H	15,5	14		19,9	10,8	18,8	1,4	4,5	13,1	12,3

¹⁾ These values, in micrometres, are applicable before any coating is applied. This requirement does not apply to threads, punched holes or sheared edges, the surface texture of which will be as achieved by the usual manufacturing methods.

²⁾ All forms of entry (radius or chamfer) are permissible within these limiting dimensions.

³⁾ Details of form not stated are left to the manufacturer's discretion.

⁴⁾ The dimensions and tolerances are applicable after any coating has been applied, but before the application of any dry film lubricant.

⁵⁾ Remove sharp edges 0,1 to 0,4.

⁶⁾ The tolerances of form and position are laid down in ISO 8788.

⁷⁾ In accordance with ISO 5855-2. In the self-locking zone, the tolerances apply before forming out-of-round.

⁸⁾ Applicable before forming out-of-round, but finished nuts shall fit a standard socket wrench; test requirements are laid down in ISO 5858.

⁹⁾ Wrench pad engagement.

iTeh STANDARD PREVIEW

standards itch ai This page intentionally left blank

ISO 7995:1988 https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-789c23ff1002/iso-7995-1988

iTeh STANDARD PREVIEW

Standards iteh zinning iteh zin

<u>ISO 7995:1988</u> https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-789c23ff1002/iso-7995-1988

iTeh STANDARD PREVIEW

(standards itch ai) This page intentionally left blank

<u>ISO 7995:1988</u> https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-789c23ff1002/iso-7995-1988 ISO 7995: 1988 (E)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 7995:1988 https://standards.iteh.ai/catalog/standards/sist/7b5af6e7-cd21-408f-87fe-789c23ff1002/iso-7995-1988

UDC 629.7:621.882.31

Descriptors: aircraft industry, aircraft equipment, fasteners, nuts (fasteners), hexagonal nuts, self locking nuts, dimensions.

Price based on 2 pages