

INTERNATIONAL STANDARD

IEC
62447-3

First edition
2007-06

**Helical-scan compressed digital video cassette
system using 6,35 mm magnetic tape –
Format D-12 –**

**Part 3:
Data stream format**

ITOH STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62447-3:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/b69352e5-443d-4bd0-b7dc-69a50d8a4a73/iec-62447-3-2007>



Reference number
IEC 62447-3:2007(E)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 62447-3

First edition
2007-06

**Helical-scan compressed digital video cassette
system using 6,35 mm magnetic tape –
Format D-12 –**

**Part 3:
Data stream format**

iteh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62447-3:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/b69352e5-443d-4bd0-b7dc-69a50d8a4a73/iec-62447-3-2007>



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

R

For price, see current catalogue

CONTENTS

| | |
|--------------------------------------------------------------------------------------|----|
| FOREWORD..... | 3 |
| 1 Scope..... | 5 |
| 2 Normative references | 5 |
| 3 Abbreviations and acronyms..... | 5 |
| 4 Identification within the serial data transport interface (SDTI)..... | 6 |
| 4.1 SDTI header packet data..... | 6 |
| 4.2 Payload..... | 6 |
| 5 Stream block format | 6 |
| 5.1 Stream block | 6 |
| 5.2 Reserved data words..... | 7 |
| 5.3 Signal type words..... | 7 |
| 5.4 Transmission type word..... | 9 |
| 5.5 DIF block ID words | 9 |
| 5.6 DIF block data words..... | 10 |
| 5.7 ECC words | 10 |
| 6 Transmission order..... | 11 |
| 7 Mapping structure..... | 13 |
| 7.1 Channel unit..... | 13 |
| 7.2 Mapping rules..... | 13 |
| Annex A (informative) Block diagram of D-12 recorder..... | 18 |
| Bibliography..... | 19 |
| Figure 1 – Stream block format..... | 7 |
| Figure 2 – ST word mapping | 7 |
| Figure 3 – TT word mapping | 9 |
| Figure 4 – Mapping of DIF block ID..... | 9 |
| Figure 5 – Mapping of ECC..... | 10 |
| Figure 6 – Transmission order in one frame for the 100 Mb/s structure | 11 |
| Figure 7 – Transmission order in a DIF sequence | 12 |
| Figure 8a – For 270 Mb/s system..... | 14 |
| Figure 8b – For 360 Mb/s system..... | 15 |
| Figure 8 – Channel unit mapping for the 100 Mb/s structure (525/60 SDTI system)..... | 15 |
| Figure 9a – For 270 Mb/s system..... | 16 |
| Figure 9b – For 360 Mb/s system..... | 17 |
| Figure 9 – Channel unit mapping for the 100 Mb/s structure (625/50 SDTI system)..... | 17 |
| Figure A.1 – Block diagram of D-7 recorder | 18 |
| Table 1 – Start lines of channel units | 17 |

<https://standards.iteh.ai/catalog/standards/sis/669352e5-443d-4bd0-b7dc-69a50d8a4a73/iec-62447-3-2007>
 IEC 62447-3:2007
 (standards.iteh.ai)

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**HELICAL-SCAN COMPRESSED DIGITAL VIDEO CASSETTE
SYSTEM USING 6,35 mm MAGNETIC TAPE –
FORMAT D-12 –**

Part 3: Data stream format

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62447-3 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

| | |
|--------------|------------------|
| CDV | Report on voting |
| 100/1093/CDV | 100/1188/RVC |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The list of all the parts of the IEC 62447 series, under the general title *Helical-scan compressed digital video cassette system using 6,35 mm magnetic tape – Format D-12* can be found on the IEC website.

This part 3 describes the specifications for transmission of DV-based compressed video and audio data stream over 270 Mb/s and 360 Mb/s serial digital interface.

Part 1 describes the VTR specifications which are tape, magnetization, helical recording, modulation method and basic system data for video compressed data.

Part 2 describes the specifications for encoding process and data format for 1080i, 1080p and 720p systems.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62447-3:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/b69352e5-443d-4bd0-b7dc-69a50d8a4a73/iec-62447-3-2007>

HELICAL-SCAN COMPRESSED DIGITAL VIDEO CASSETTE SYSTEM USING 6,35 mm MAGNETIC TAPE – FORMAT D-12 –

Part 3: Data stream format

1 Scope

This part of IEC 62447 defines the format of the data stream for the synchronous exchange of DV-based audio, data, and compressed video (whose data structure is defined in SMPTE 370M) over the interface defined in SMPTE 305M. It covers the transmission of audio, subcode data and compressed video packets associated with DV-based 100 Mb/s data structures for 525/60 SDTI and 625/50 SDTI systems.

Space within SMPTE 305M not used by a data stream conforming to this standard may be used for the transmission of data other than those representing DV-based audio, data and compressed video.

In this standard, the 60 Hz system refers to the field-frequency 59,94 Hz system and the 50 Hz system refers to the field-frequency 50,0 Hz system.

2 Normative references (standards.iteh.ai)

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

SMPTE 305M.2-2000, Television – Serial Data Transport Interface

3 Abbreviations and acronyms

| | |
|------|---------------------------------|
| SDI | Serial digital interface |
| SDTI | Serial data transport interface |
| ECC | Error correction code |
| DIF | Digital interface |
| ST | Signal type |
| STVF | Signal type of video frame |
| FF | Field/frame frequency flag |
| DVF | DIF valid flag |
| FSNF | Frame sequence number flag |
| TRF | Transmission rate flag |
| TT | Transmission type |

4 Identification within the serial data transport interface (SDTI)

4.1 SDTI header packet data

The header packet data words of the serial data transport interface (SDTI) associated with this data stream format shall conform to SMPTE 305M. When the SDTI interface transports a data stream conforming to this standard, the block type word within the SDTI header packet shall have the value 173_h for transported data contained in fixed-size blocks when ECC is used and the value 233_h when ECC is not used.

4.2 Payload


The payload is composed of consecutive fixed-size blocks (see Figure 1). The SDTI data type word shall identify the data type of this payload with the value 221_h.

5 Stream block format

5.1 Stream block

The stream block format is shown in Figure 1. The length of each stream block is 170 words, including a secondary header, two DIF (digital interface) block IDs, two DIF block data (of stream data) and an ECC block. The secondary header contains reserved data words, signal type words, and a transmission type word. The complete word structure of the stream block for a compressed video data stream is defined below.

| | |
|-------------------|------------|
| Reserved data | : 3 words |
| Signal type | : 2 words |
| Transmission type | : 1 word |
| DIF block ID | : 3 words |
| DIF block data | : 77 words |
| DIF block ID | : 3 words |
| DIF block data | : 77 words |
| ECC | : 4 words |

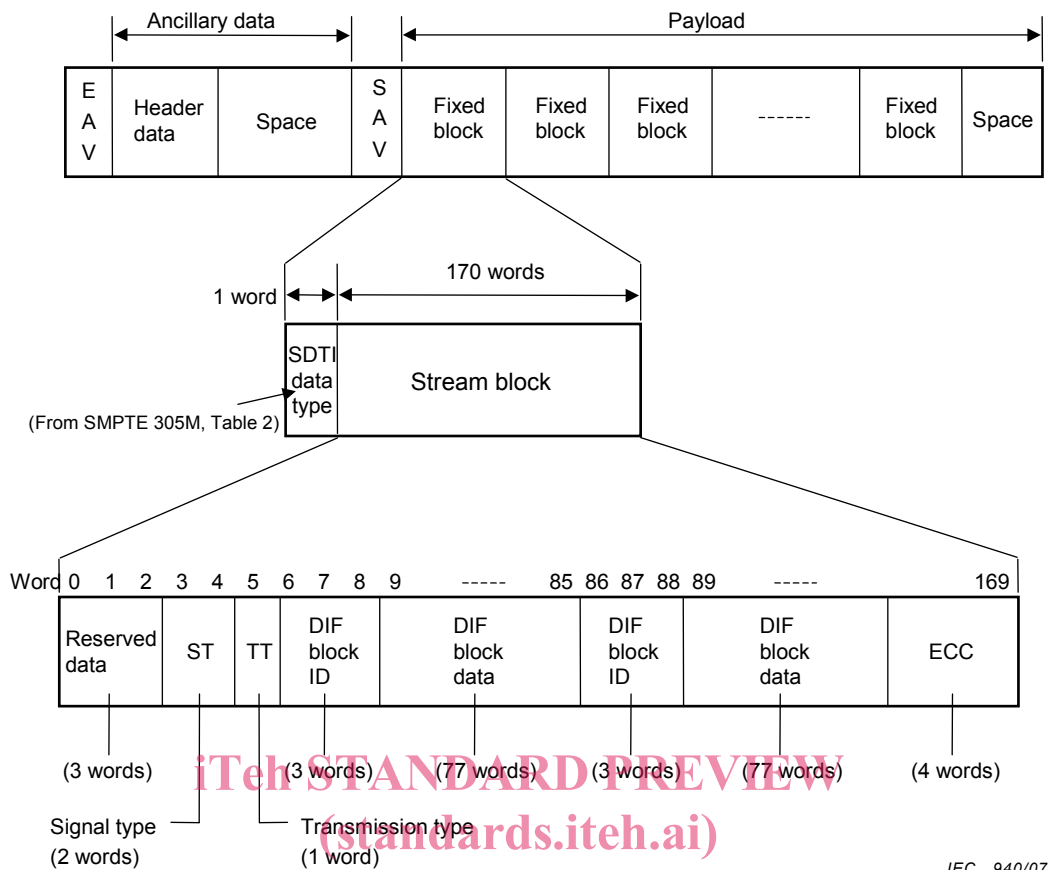

IEC 62447-3:2007
<https://standards.iteh.ai/catalog/standards/sist/b69352e5-443d-4bd0-b7dc-4056184-666666666666>

Figure 1 – Stream block format

5.2 Reserved data words

The reserved data words shall consist of 3 words and be positioned at the start of the stream block. The default value for the reserved data is 200_h.

5.3 Signal type words

The signal type word (ST) mapping is shown in Figure 2. The signal type words shall consist of two words. The first word of ST (word 3) includes the specific type of video frame ID (STVF ID). The second word of ST (word 4) includes the field/frame frequency flag (FF), the DIF structure format, the DIF valid flag (DVF), the frame sequence number flag (FSNF), the transmission rate flag (TRF) and reserved bits.

| | | | | | | | | | | |
|--------|----|----|----|---------------|----|-----|-----|---------|-----|----|
| | B9 | B8 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| Word 3 | EP | EP | | Reserved | | | | STVF ID | | |
| Word 4 | EP | EP | FF | DIF structure | | Res | DVF | FSNF | TRF | |

IEC 941/07

Figure 2 – ST word mapping

a) Word 3 of ST

The STVF ID shows information mainly related to pictures that have been 3:2 pull-down converted from 480 line/29,98 frame rate progressive pictures.

All values of bits B7 through B0 are set to 00_h as default values.

Bit B8 of word 3 is equal to the even parity of B7 through B0.

Bit B9 of word 3 is equal to the complement of B8.

b) Word 4 of ST

Bit B7 indicates the field frequency of SDI with the following values:

| B7 | |
|----|--------------------|
| 0 | : 60 Hz (59,94 Hz) |
| 1 | : 50 Hz |

Bits B6 through B4 indicate the DIF structure with the following values:

| B6 | B5 | B4 | |
|----|----|----|----------------------|
| 0 | 0 | 0 | : Reserved |
| 0 | 0 | 1 | : Reserved |
| 0 | 1 | 0 | : Reserved |
| 0 | 1 | 1 | : 25 Mb/s structure |
| 1 | 0 | 0 | : Reserved |
| 1 | 0 | 1 | : 50 Mb/s structure |
| 1 | 1 | 0 | : 100 Mb/s structure |
| 1 | 1 | 1 | : Reserved |

Bit B3 is reserved bit and shall be set to 0_b as default value.

Bit B2 is the DVF and indicates the validity of the DIF data mapped into SDTI.

| B2 | |
|----|-----------|
| 0 | : Invalid |
| 1 | : Valid |

Bit B1 is the FSNF and indicates the validity of the frame sequence number (see 4.3) with the following values:

| B1 | |
|----|-----------|
| 0 | : Valid |
| 1 | : Invalid |

Bit B0 is the TRF and indicates the validity of the transmission rate (see 4.3) with the following values:

| B0 | |
|----|-----------|
| 0 | : Valid |
| 1 | : Invalid |

Bit B8 is equal to the even parity of B7 through B0.

Bit B9 is equal to the complement of B8.

5.4 Transmission type word

The TT word mapping is shown in Figure 3. The TT word shall consist of one word including the frame sequence number and the transmission rate.

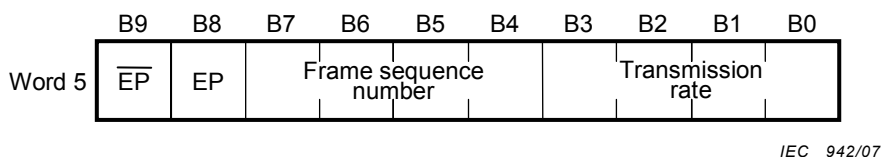


Figure 3 – TT word mapping

Bits B7 through B4 indicate the frame sequence number with the following values:

- 0h : 1
- 1h : 2
- |
- Fh : 16

The frame sequence number identifies frames multiplexed within an SDTI frame.

Bits B3 through B0 indicate the transmission rate with the following values:

- 0h : 1 x (normal transmission rate) (see note)
- 1h : 2 x
- 2h : 3 x
- 3h : 4 x
- 4h : 5 x
- 5h : 6 x
- 6h : 7 x
- 7h : 8 x
- 8h – Eh: Reserved
- Fh : 16 x


NOTE The multiple of the normal transmission rate is represented by x. The normal transmission rate corresponding to normal reproduction of the television picture is 1 x.

Bit B8 is equal to the even parity of B7 through B0.

Bit B9 is equal to the complement of B8.

5.5 DIF block ID words

The DIF block ID (ID0-2) shall consist of three words, contained in bits A23 through A0 as shown in Figure 4. The lower 8-bit portion of these three words is specified in SMPTE 370M.

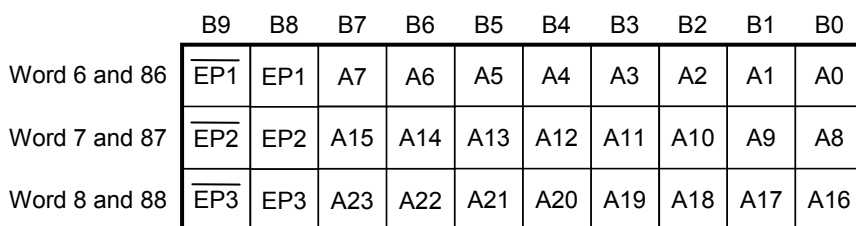

IEC 943/07

Figure 4 – Mapping of DIF block ID