

# INTERNATIONAL STANDARD

Digital audio interface –  
Part 1: General

iTech Standards  
(<https://standards.iteh.ai>)  
Document Preview

IEC 60958-1:2008

<https://standards.iteh.ai/standards/iec/a48e35a8-f500-4bcd-a3b5-cf8869dd7b9a/iec-60958-1-2008>

Withhold



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2008 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

<https://standards.iec.org/a48e35a8-f500-4bcd-a3b5-cf8869dd7b9a/iec-60958-1-2008>



IEC 60958-1

Edition 3.0 2008-09

# INTERNATIONAL STANDARD

Digital audio interface –  
Part 1: General

iTech Standards  
(<https://standards.iteh.ai>)  
Document Preview

IEC 60958-1:2008

<https://standards.iteh.ai/en/standards/iec/a48e35a8-f500-4bcd-a3b5-cf8869dd7b9a/iec-60958-1-2008>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

U

ICS 33.160.01

ISBN 978-2-88910-350-8

## CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references .....	6
3 Terms and definitions .....	6
4 Interface format.....	8
4.1 Structure of format .....	8
4.1.1 Sub-frame format.....	8
4.1.2 Frame format.....	9
4.2 Channel coding .....	9
4.3 Preambles .....	10
4.4 Validity bit .....	11
5 Channel status .....	11
5.1 General.....	11
5.2 Applications.....	11
5.3 General assignment of the first and second channel status bits.....	12
5.4 Category code.....	12
6 User data .....	14
6.1 General.....	14
6.2 Applications.....	14
6.2.1 Professional use .....	14
6.2.2 Consumer use .....	14
7 Electrical requirement.....	14
7.1 Consumer application.....	14
7.1.1 General .....	14
7.1.2 Timing accuracy .....	14
7.1.3 Unbalanced line.....	15
7.2 Professional application .....	18
8 Optical requirements .....	18
8.1 Consumer application.....	18
8.1.1 Optical specification .....	18
8.1.2 Optical connector .....	19
8.2 Professional applications.....	19
Annex A (informative) The use of the validity bit .....	20
Annex B (informative) Application documents and specifications.....	21
Annex C (informative) A relationship of the IEC 60958 series families.....	22
Annex D (informative) Transmission of CD data other than linear PCM audio .....	23
Annex E (informative) The IEC 60958 series conformant data format.....	24
Annex F (informative) Stream change .....	25
Annex G (informative) Characteristics of optical connection.....	27
Bibliography.....	29
Figure 1 – Sub-frame format (linear PCM application).....	9
Figure 2 – Frame format .....	9
Figure 3 – Channel coding .....	10

Figure 4 – Preamble M (shown as 11100010) .....	11
Figure 5 – Simplified example of the configuration of the circuit (unbalanced).....	15
Figure 6 – Rise and fall times .....	16
Figure 7 – Intrinsic jitter measurement filter .....	16
Figure 8 – Eye diagram.....	17
Figure 9 – Receiver jitter tolerance template.....	17
Figure 10 – Basic optical connection.....	18
Figure C.1 – A relationship of IEC 60958 families .....	22
Figure F.1 – Audio sources and AV receiver model.....	25
Figure F.2 – Switching from linear PCM to non linear PCM .....	26
Figure F.3 – Switching from non linear PCM to linear PCM .....	26
Figure F.4 – Switching from non-linear PCM to non-linear PCM .....	26
Table 1 – Preamble coding .....	10
Table 2 – Channel status data format .....	13
Table B.1 – Application documents and specifications .....	21
Table G.1 – Characteristics of standard optical connection (optical interface).....	27
Table G.2 – Characteristics of optical transmitter (optical interface).....	27
Table G.3 – Characteristics of optical receiver (optical interface).....	28
Table G.4 – Characteristics of fibre optic cable.....	28
Table G.5 – Optical power budget for the link with plastic fibre .....	28

IEC 60958-1:2008

<https://standards.iteh.ai/en/standards/iec/a48e35a8-f500-4bcd-a3b5-cf8869dd7b9a/iec-60958-1-2008>

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

## DIGITAL AUDIO INTERFACE –

### Part 1: General

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard 60958-1 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

This third edition of IEC 60958-1 cancels and replaces the second edition published in 2004 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition.

Electrical and optical requirements are removed from IEC 60958-3; they are specified in IEC 60958-1.

The text of this standard is based on the following documents:

CDV	Report on voting
100/1252/CDV	100/1337/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60958 series, under the general title *Digital audio interface*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

# DIGITAL AUDIO INTERFACE –

## Part 1: General

### 1 Scope

This part of IEC 60958 describes a serial, uni-directional, self-clocking interface for the interconnection of digital audio equipment for consumer and professional applications.

It provides the basic structure of the interface. Separate documents define items specific to particular applications.

The interface is primarily intended to carry monophonic or stereophonic programmes, encoded using linear PCM and with a resolution of up to 24 bits per sample.

When used for other purposes, the interface is able to carry audio data coded other than as linear PCM coded audio samples. Provision is also made to allow the interface to carry data related to computer software or signals coded using non-linear PCM. The format specification for these applications is not part of this standard.

The interface is intended for operation at audio sampling frequencies of 32kHz and above. Auxiliary information is transmitted along with the programme.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60268-11, *Sound system equipment – Part 11: Application of connectors for the interconnection of sound system components*

IEC 60874-17, *Connectors for optical fibres and cables – Part 17: Sectional specification for fibre optic connector – Type F-05 (friction lock)*

IEC 60958-3, *Digital audio interface – Part 3: Consumer applications*

IEC 60958-4, *Digital audio interface – Part 4: Professional applications*

### 3 Terms and definitions

For the purpose of this International Standard, the following terms and definitions apply.

#### 3.1

##### **sampling frequency**

frequency of the samples representing an audio signal

NOTE When more than one signal is transmitted through the same interface, the sampling frequencies are identical.



### 3.2

#### **audio sample word**

value of a digital audio sample; representation is linear in 2's complement binary form

NOTE Positive numbers correspond to positive analogue voltages at the input of the analogue-to-digital converter (ADC).

### 3.3

#### **auxiliary sample bit**

the four least significant bits (LSBs) which can be assigned as auxiliary sample bits and used for auxiliary information when the number of audio sample bits in the main data field is less than or equal to 20

### 3.4

#### **validity bit**

bit indicating whether the main data field bits in the sub-frame (time slots 4 to 27 or 8 to 27, depending on the audio word length as described in 4.1.1) are reliable or not

### 3.5

#### **channel status**

the channel status carries, in a fixed format, information associated with each main data field channel which is decodable by any interface user

NOTE Examples of information to be carried in the channel status are: length of audio sample words, pre-emphasis, sampling frequency, time codes, alphanumeric source and destination codes.

### 3.6

#### **user data**

the user data channel is provided to carry any other information

### 3.7

#### **parity bit**

bit provided to permit the detection of an odd number of errors resulting from malfunctions in the interface

### 3.8

#### **preamble**

specific patterns used for synchronization

NOTE There are three different preambles (see 4.3).

### 3.9

#### **sub-frame**

fixed structure used to carry information (see 4.1.14.1.1 and 4.1.2)

### 3.10

#### **frame**

sequence of two successive and associated sub-frames

### 3.11

#### **block**

group of 192 consecutive frames

NOTE The start of a block is designated by a special sub-frame preamble (see 4.3).

### 3.12

#### **channel coding**

coding method by which the binary digits are represented for transmission through the interface

### 3.13

#### **unit interval (UI)**

the shortest nominal time interval in the coding scheme

NOTE There are 128 UI in a sample frame.

### 3.14

#### **interface jitter**

deviation in the timing of interface data transitions (zero crossings) when compared with an ideal clock

### 3.15

#### **intrinsic jitter**

output interface jitter of a device that is either free-running or is synchronized to a jitter-free reference

### 3.16

#### **jitter gain**

ratio of the amplitude of jitter components at the output to their amplitude at the synchronization input to the device under test

## 4 Interface format

### 4.1 Structure of format

#### 4.1.1 Sub-frame format

Each sub-frame is divided into 32 time slots, numbered from 0 to 31 (see Figure 1).

Time slots 0 to 3 (preambles) carry one of the three permitted preambles (see 4.1.2 and 4.3; also see Figure 2).

Time slots 4 to 27 (main data field) carry the audio sample word in linear 2's complement representation. The most significant bit (MSB) is carried by time slot 27.

When a 24-bit coding range is used, the LSB is in time slot 4 (see Figure 1).

When a 20-bit coding range is used, time slots 8 to 27 carry the audio sample word with the LSB in time slot 8. Time slots 4 to 7 may be used for other applications. Under these circumstances, the bits in the time slots 4 to 7 are designated auxiliary sample bits (see Figure 1).

If the source provides fewer bits than the interface allows (either 20 or 24), the unused LSBs are set to a logical "0".

For a non-linear PCM audio application or a data application the main data field may carry any other information.

Time slot 28 (validity bit) carries the validity bit associated with the main data field (see 4.4).

Time slot 29 (user data bit) carries 1 bit of the user data channel associated with the main data field channel transmitted in the same sub-frame. For the applications, refer to the other parts of IEC 60958.

Time slot 30 (channel status bit) carries 1 bit of the channel status information associated with the main data field channel transmitted in the same sub-frame. For details refer to the other parts of IEC 60958.

Time slot 31 (parity bit) carries a parity bit such that time slots 4 to 31 inclusive carry an even number of ones and an even number of zeroes (even parity).

NOTE The preambles have even parity as an explicit property.

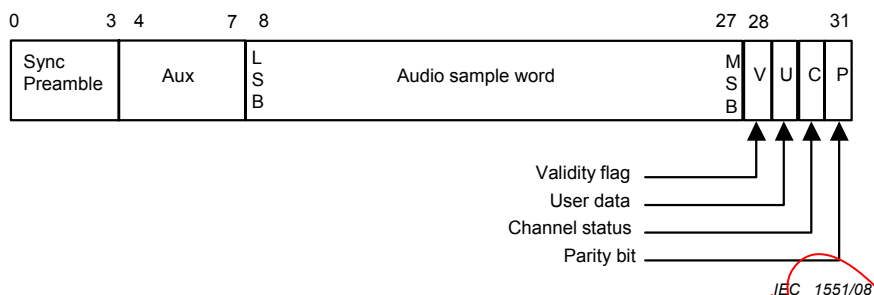


Figure 1 – Sub-frame format (linear PCM application)

4.1.2 Frame format

A frame is uniquely composed of two sub-frames (see Figure 2). For linear coded audio applications, the rate of transmission of frames normally corresponds exactly to the source sampling frequency.

In 2-channel operation mode, the samples taken from both channels are transmitted by time multiplexing in consecutive sub-frames. The first sub-frame (left or "A" channel in stereophonic operation and primary channel in monophonic operation) normally starts with preamble "M". However, the preamble changes to preamble "B" once every 192 frames to identify the start of the block structure used to organize the channel status information. The second sub-frame (right or "B" channel in stereophonic operation and secondary channel in monophonic operation) always starts with preamble "W".

In single channel operation mode in a professional application, the frame format is the same as in the 2-channel mode. Data is carried in the first sub-frame and may be duplicated in the second sub-frame. If the second sub-frame is not carrying duplicate data, then time slot 28, (validity flag) shall be set to logical "1".

NOTE For historical reasons preambles "B", "M" and "W" are, for use in professional applications, referred to as "Z", "X" and "Y", respectively.

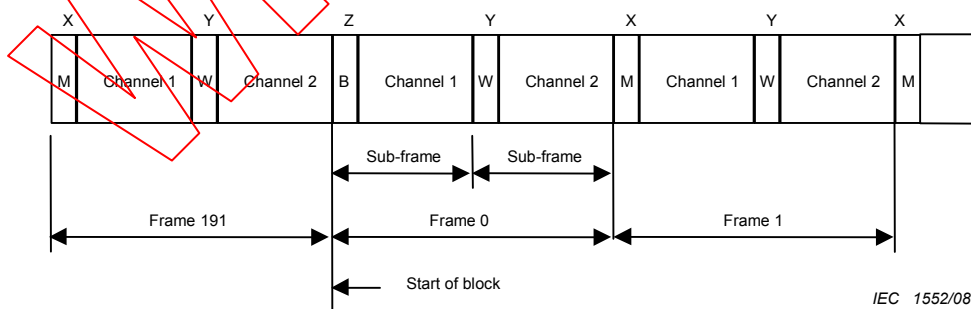


Figure 2 – Frame format

4.2 Channel coding

To minimize the direct current (d.c.) component on the transmission line, to facilitate clock recovery from the data stream and to make the interface insensitive to the polarity of connections, time slots 4 to 31 are encoded in biphasemark.

Each bit to be transmitted is represented by a symbol comprising two consecutive binary states. The first state of a symbol is always different from the second state of the previous