

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 12307-1:2002

<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-be6b-4ad46e01673e/sist-iso-12307-1-2002>

INTERNATIONAL
STANDARD

ISO
12307-1

First edition
1994-12-15

Plain bearings — Wrapped bushes —

Part 1:

Checking the outside diameter

iTeh STANDARD PREVIEW

(standards.iteh.ai)

Paliers lisses — Bagues roulées —

Partie 1: Contrôle du diamètre extérieur

<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-be6b-4ad46e01673e/sist-iso-12307-1-2002>



Reference number
ISO 12307-1:1994(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 12307-1 was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 5, *Quality analysis and assurance*.

ISO 12307 consists of the following parts under the general title *Plain bearings — Wrapped bushes*:

- Part 1: *Checking the outside diameter*
- Part 2: *Checking the inside diameter*

Annexes A, B and C of this part of ISO 12307 are for information only.

Plain bearings — Wrapped bushes —

Part 1: Checking the outside diameter

1 Scope

This part of ISO 12307 specifies in accordance with ISO 12301 the checking of the outside diameter of wrapped bushes (methods A and B specified in ISO 3547) and describes the necessary checking methods and measuring equipment.

Wrapped bushes in the free condition are flexible but, after insertion, they adapt largely to the shape of the housing bore due to the oversize between the outside diameter of the bush and the housing bore. For this reason, checking of the outside diameter of wrapped bushes can only be carried out under a constraining load by use of specialized measuring equipment.

NOTES

- 1 All dimensions in this part of ISO 12307 are given in millimetres.
- 2 The dimensions and tolerances of wrapped bushes are given in ISO 3547. Checking the wall thickness is the subject of ISO 12306.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 12307. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 12307 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 286-1:1988, *ISO system of limits and fits — Part 1: Bases of tolerances, deviations and fits.*

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts.*

ISO/R 1938:1971, *ISO system of limits and fits — Part II: Inspection of plain workpieces.*

ISO 3547:1976, *Plain bearings — Wrapped bushes — Dimensions, tolerances and methods of checking.*

3 Symbols and units


For the purposes of this part of ISO 12307, the symbols and units are as given in table 1.

Table 1 — Symbols and units

Symbol	Parameter	SI unit
a_c	Distance between checking block halves	mm
B	Width of the bush	mm
$b_{c,1}$	Width of the checking block	mm
$b_{c,2}$	Width of the setting plug ($b_{c,2} = b_{c,1} + 5$)	mm
D_o	Outside diameter of the bush	mm
$d_{c,1}$	Diameter of the checking block bore (see ISO 3547)	mm
$d_{c,2}$	Diameter of the setting plug	mm
$d_{c,a,1}$	Actual diameter of the checking block	mm
$d_{c,a,2}$	Actual diameter of the setting plug	mm
E_{red}	Elastic reduction of the outside diameter under the checking load F_c	mm
F_c	Checking load	N
C	Correction factor	mm
n	Number of test pieces	
P_{zw}	Confidence level, on both sides	%
R_a	Surface roughness (in accordance with ISO 468)	μm
T	Tolerance on D_o	mm
$t_1 \dots t_6$	Tolerances of form and position	mm
u	Uncertainty of measurement ($P_{zw} = 95\%$)	mm
u_E	Uncertainty of measurement of the measuring equipment	mm
Δx	Difference in measured values between first and second readings	mm
$\overline{\Delta x}$	Arithmetic mean of Δx	mm
σ	Standard deviation	mm
$\sigma_{\Delta x}$	Standard deviation of Δx	mm

4 Outside diameter, D_o

For the outside diameter of a wrapped bush, see figure 1.



NOTE — The free diameter of a wrapped bush is not measured directly because of the flexible nature of the component.

Figure 1 — Outside diameter of a wrapped bush

5 Purpose of checking

The outside diameter shall be checked to guarantee the designated mounting compression (interference fit) for the wrapped bush in the housing bore.

6 Methods of checking

6.1 Checking method A: Measurement of outside diameter, D_o (see ISO 3547)

Check the outside diameter of a wrapped bush using measuring equipment as shown in figure 2, with a checking block consisting of upper and lower halves (see figures 3 and 4) and setting plugs (see figures 5 and 6), at a determined checking load of F_c .

Measure the outside diameter indirectly as the difference in the value of a_c (Δa_c).

The checking load is calculated such that the bush outside diameter is reduced only elastically during checking and that there is no permanent deformation.

6.2 Checking method B: Gauging of outside diameter, D_o (see ISO 3547)

Check the outside diameter of a wrapped bush in "GO" and "NOT-GO" ring gauges.

The checking result is of an attributive nature, i.e. "GO" or "NOT-GO".

7 Selection of checking method for outside diameter

Method A is a precise method involving complex tooling. Method B is an attributive method using simpler tooling. Both methods are in general use. Method A is generally unsuitable for small bushes up to 10 mm outside diameter but is preferred for bushes over 10 mm outside diameter.


8 Test ISO 3547 — A: Outside diameter, D_o

8.1 Measuring equipment

See tables 2 to 4.

Typical equipment for measuring the bush consists essentially of the following components:

- base plate used as fixture and guiding device for the split checking block;
- aggregate to generate the checking load;
- upper plate;
- system transferring the distance a_c of both checking block halves to the measuring pin (see figure 2);
- measuring pin with indicating instrument;
- checking block (see figures 3 and 4) with setting plug (see figures 5 and 6);
- correlation compression (load table).

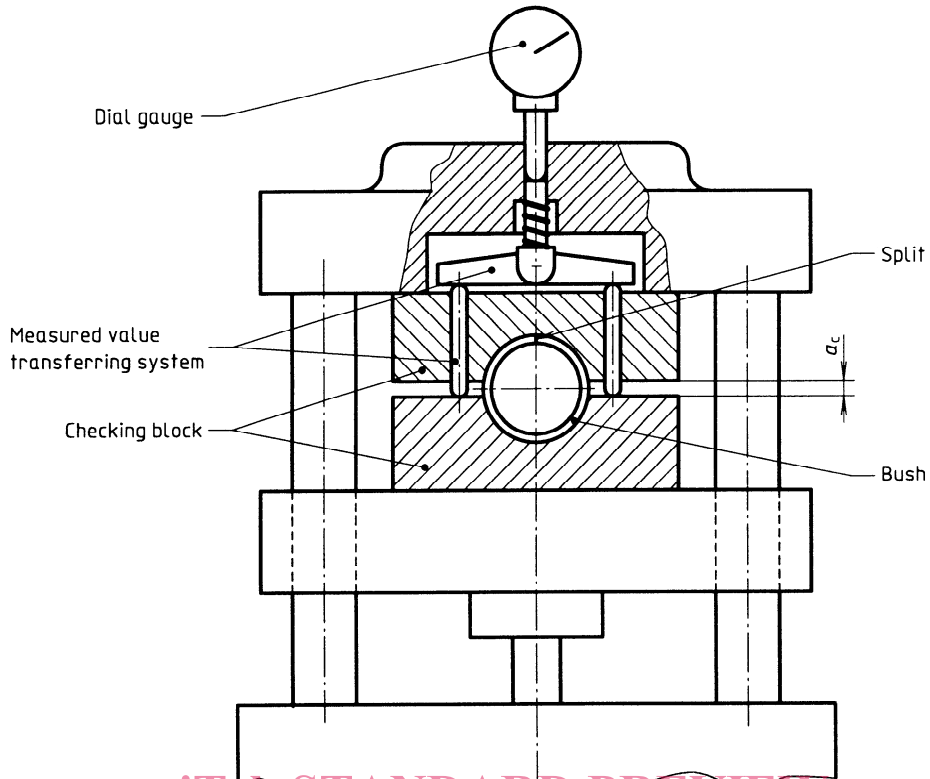

iTECH STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 12307-1:2002

<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-be6b-4ad46c01679c/sist-iso-12307-1-2002>
Figure 2 — Typical outside diameter measuring system

Figure 2 shows hydraulically operated equipment. Pneumatically or mechanically operated equipment may also be used.

The force F_c may be applied from the top or from below.

The bush split shall be in the vertical direction and pointing towards the upper checking block.

Table 2 — Checking loads, limiting deviations, speeds of approach and temperatures

Checking load F_c N	Permissible limiting deviations %	Maximum speed of approach to apply the checking load F_c mm/s	Test temperature ¹⁾ °C
$F_c \leq 2\,000$	$\pm 1,25$	10 ± 2 without impact	20 to 25
$2\,000 < F_c \leq 5\,000$	± 1		
$5\,000 < F_c \leq 10\,000$	$\pm 0,75$		
$10\,000 < F_c \leq 50\,000$	$\pm 0,5$		

1) The difference in temperature between the checking block and the bush to be measured shall not exceed 1 °C.

Table 3 — Deviations for dial gauge and electronic gauge

Outside diameter D_o mm	Scale graduation value		Total deviation ¹⁾	
	dial gauge	mm electronic gauge	dial gauge	mm electronic gauge
$D_o \leq 80$	0,001	0,001	0,001 2	0,5 % of measuring range
$D_o > 80$	0,005	0,001	0,006	

1) Maximum measuring value indication (full-scale $\pm 500 \mu\text{m}$).

Table 4 — Manufacturing tolerances for the upper and lower clamping surfaces of the measuring equipment

Tolerance of parallelism between both clamping surfaces mm	Tolerance of flatness mm	Surface roughness, R_a μm
0,01/100	0,005	0,2

iTeh STANDARD PREVIEW
(standards.iteh.ai)

8.2 Requirements for measuring equipment

The requirements for the measuring equipment for measurement of the bush outside diameter, D_o , shall be as shown in figures 3 to 6 and given in table 5:

[SIST ISO 12307-1:2002](https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-be6b-4ad46e01673e/sist-iso-12307-1-2002)

<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-be6b-4ad46e01673e/sist-iso-12307-1-2002>

$$d_{c,1} = D_{o,\max} - E_{\text{red}}$$

$$E_{\text{red}} = 0,006 \text{ mm for } D_o < 12 \text{ mm}$$

$$E_{\text{red}} = 0,0012 \text{ mm for } D_o \geq 12 \text{ mm}$$

$$b_{c,1} \geq B + 2$$

$$h_{c,2} = h_{c,1} + 5$$

where E_{red} is the elastic reduction in accordance with ISO 3547.

Dimensions in millimetres,
surface roughness values in micrometres

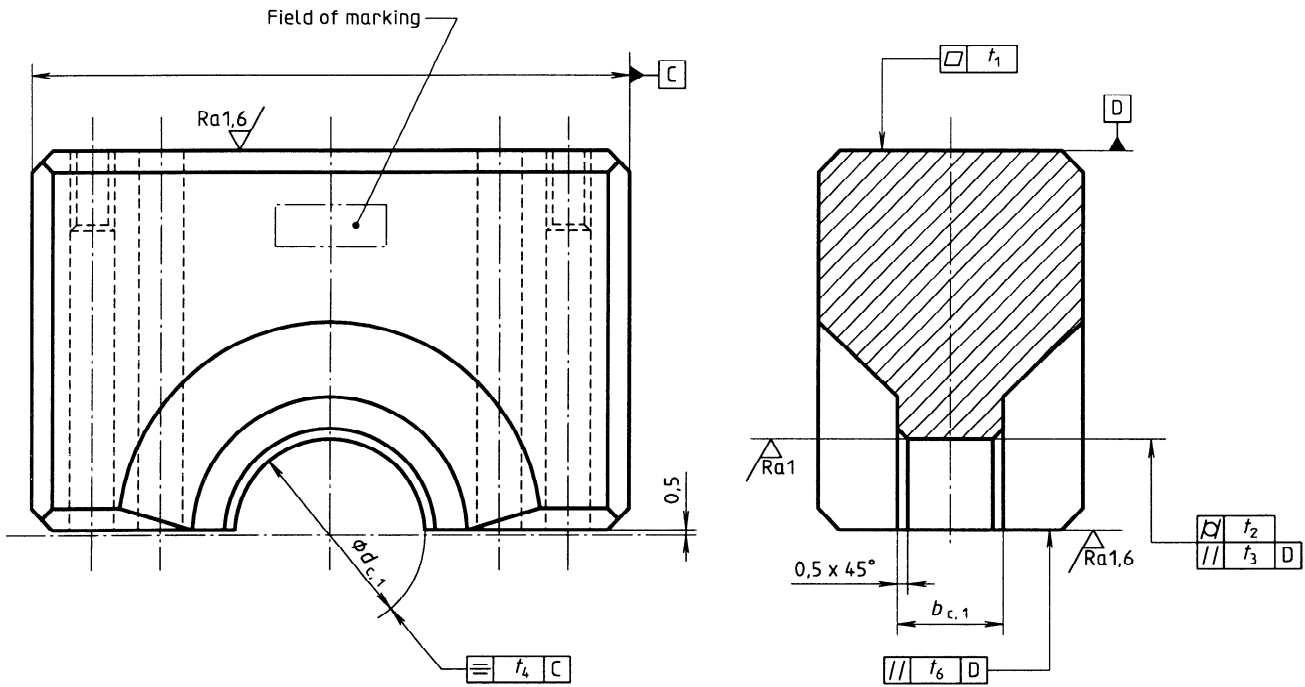


Figure 3 — Upper half of checking block
(standards.iteh.ai)

SIST ISO 12307-1:2002
<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-bef6-4ad46e01673e/sist-iso-12307-1-2002>
 Dimensions in millimetres,
surface roughness values in micrometres

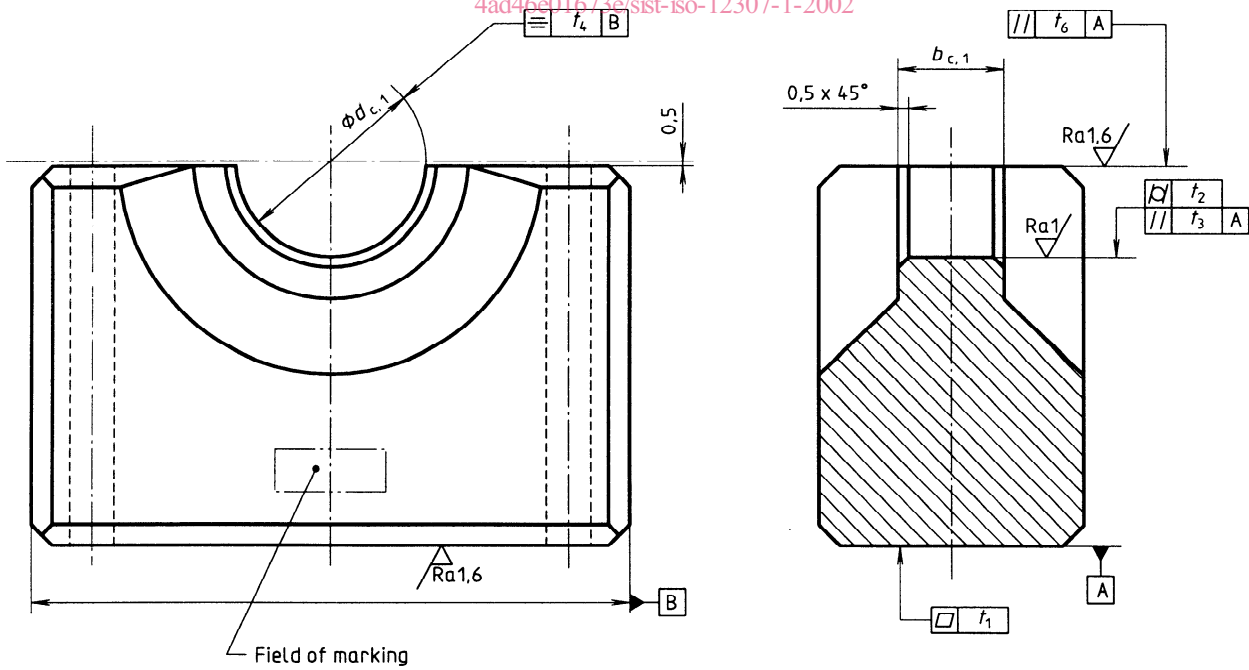


Figure 4 — Lower half of checking block

Dimensions in millimetres,
surface roughness values in micrometres

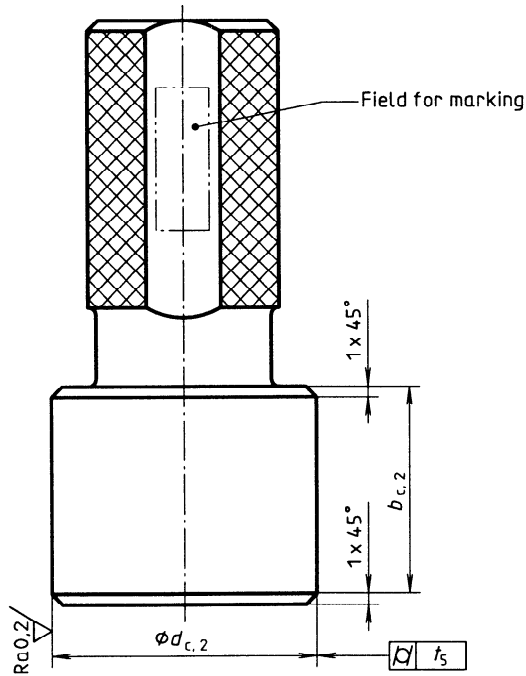


Figure 5 — Setting plug, solid, for $d_{c,2} \leq 80$ mm
(standards.iteh.ai)

SIST ISO 12307-1:2002
<https://standards.iteh.ai/catalog/standards/sist/21576fc9-d9e8-4b68-b50f-4ad46e01673e/sist-iso-12307-1-2002>
 Dimensions in millimetres,
surface roughness values in micrometres

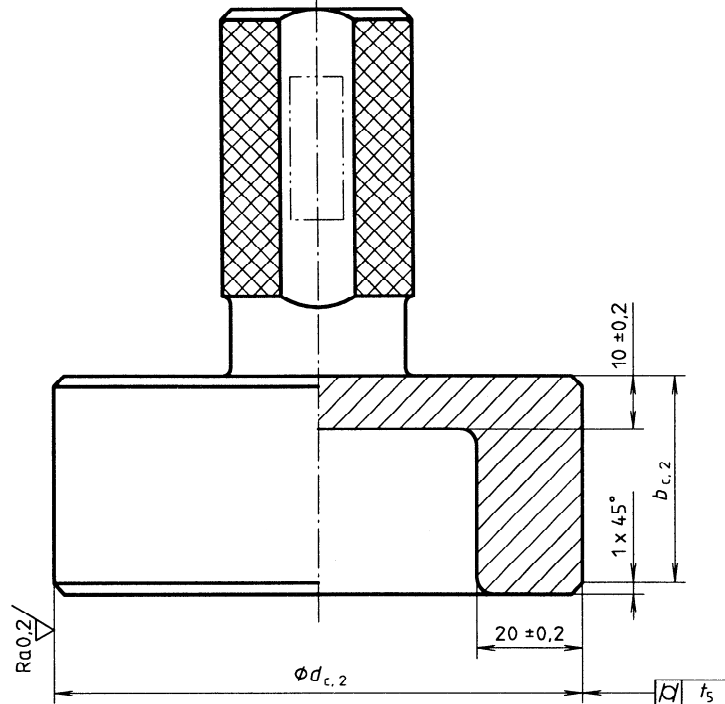


Figure 6 — Setting plug, for example with blind hole, for $d_{c,2} > 80$ mm