




Edition 1.0 2007-06

TECHNICAL SPECIFICATION

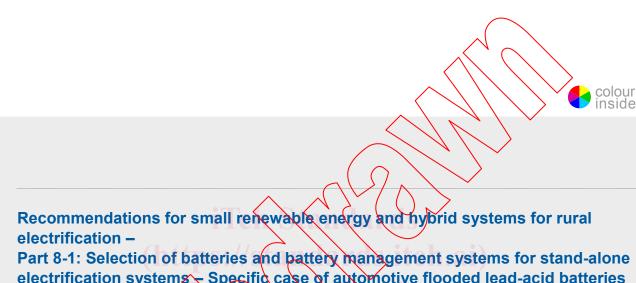

electrification systems - Specific case of automotive flooded lead-acid batteries available in developping countries





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IFC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Email: inmail@iec.ch Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

■ Catalogue of IEC publications: <u>www.iec.ch/searchpub</u>

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

■ IEC Just Published: www.iec.ch/online news/justpub

Stay up to date on all new IEC publications. Just Published details wice a month all new publications released. Available on-line and also by email.

Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

■ Customer Service Centre: https://www.ieo.ch/webstore/custserv
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact os:


Email: csc@iec.ch

Tel.: +41 22 919 02 11 Fax: +41 22 919 03 00

IEC/TS 62257-8-1

Edition 1.0 2007-06

TECHNICAL SPECIFICATION



Recommendations for small renewable energy and hybrid systems for rural electrification –

Part 8-1: Selection of batteries and battery management systems for stand-alone electrification systems. Specific case of automotive flooded lead-acid batteries available in developping countries.



INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE

T

ICS 27.160; 27.180

ISBN 2-8318-9189-2

CONTENTS

1	Scor	oe		
2	Normative references			
3	Terms and definitions			
4	Batteries and battery management system selection			
•	4.1 Batteries technical characteristics			
	7.1	4.1.1 Battery cases		
		4.1.3 Electrolyte		
	4.2	Comparative tests		
		4.2.1 Evaluation of the charge and discharge current for testing (/test)	1	
		4.2.2 Test 1: Battery endurance test	1	
		4.2.3 Test 2: Endurance test for dattery+BMS	1	
		4.2.4 Test 3: Battery storability test		
5		umentation	1	
6	Insta	Illation rules	1	
	6.1	Packing and shipping	1	
	6.2	Environment	1	
	6.3	Battery accommodation, housing	2	
		6.3.1 Provision against electrolyte hazard	2	
		6.3.2 Prevention of short circuits and protection from other effects of electric current	5	
		6.3.3 Battery enclosures	2	
	6.4	Final inspection	2257	
	6.5	Safety		
		6.5.1 Safety provisions	2	
		6.5.2 Safety Information		
	6.6	Administrative formalities		
	6.7	Recycling	2	
		– Test 1 pháses		
		Phase A battery endurance test		
Fig	gure 3	Phase B battery endurance test	1	
Fig	gure 4	- Test 2 phases	1	
Fig	gure 5	Phase C battery-BMS endurance test	1	
Fig	gure 6	- Test 3 phases	1	
Fig	gure 7	– Phase D storability test	1	
Fig	gure 8	- Marking for spillage prevention	1	
To	ble 1 -	- Testing procedure	1	
ıα				

INTERNATIONAL ELECTROTECHNICAL COMMISSION

RECOMMENDATIONS FOR SMALL RENEWABLE ENERGY AND HYBRID SYSTEMS FOR RURAL ELECTRIFICATION –

Part 8-1: Selection of batteries and battery management systems for stand-alone electrification systems – Specific case of automotive flooded lead-acid batteries available in developing countries

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees, any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC 62257-8-1, which is a technical specification, has been prepared by IEC technical committee 82: Solar photovoltaic energy systems.

This document is based on IEC/PAS 62111 (1999); it cancels and replaces the relevant parts of IEC/PAS 62111.

This part of IEC 62257 is to be used in conjunction with the IEC 62257 series.

It is also to be used with future parts of this series as and when they are published.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
82/457/DTS	82/476/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- · transformed into an International Standard,
- reconfirmed.
- · withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The "colour inside" logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

INTRODUCTION

The IEC 62257 series of documents intends to provide to different players involved in rural electrification projects (such as project implementers, project contractors, project supervisors, installers, etc.) documents for the setting up of renewable energy and hybrid systems with a.c. voltage below 500 V, d.c. voltage below 750 V and power below 100 kVA.

These documents are recommendations:

- to choose the right system for the right place;
- · to design the system;
- to operate and maintain the system.

These documents are focused only on rural electrification concentrating on but not specific to developing countries. They must not be considered as all inclusive to rural electrification. The documents try to promote the use of renewable energies in rural electrification; they do not deal with clean mechanisms developments at this time (CO_2 emission, carbon credit, etc.). Further developments in this field could be introduced in future steps.

This consistent set of documents is best considered as a whole with different parts corresponding to items for safety, sustainability of systems and at the lowest life cycle cost as possible. One of the main objectives is to provide the minimum sufficient requirements, relevant to the field of application that is: small renewable energy and hybrid off-grid systems.

For rural electrification project using PV systems, it is recommended to use solar batteries defined in IEC 61427.

Nevertheless in many situations, it is a fact that most of the rural electrification projects are implemented using locally made automotive flooded lead-acid batteries. But these products are not designed for photovoltaic systems application. There is presently no test to discriminate, in a panel of models of such batteries, which one could provide the best service as close as possible to the requirement of the General Specification as a storage application for small PV individual electrification systems (see IEC 62257-2) in an economically viable way.

The purpose of Part 8-1 of IEC 62257 is to propose tests for automotive lead acid batteries and batteries management systems used in small PV Individual Electrification Systems

This document and the others in the IEC 62257 series are only guidance and so cannot be international standards. Additionally, their subject is still under technical development and so they shall be published as Technical Specifications.

NOTE $\,$ The IEC 62257 series of Technical Specifications is based on IEC/PAS 62111 (1999-07) and is developed in accordance with the PAS procedure.

RECOMMENDATIONS FOR SMALL RENEWABLE ENERGY AND HYBRID SYSTEMS FOR RURAL ELECTRIFICATION –

Part 8-1: Selection of batteries and battery management systems for stand-alone electrification systems – Specific case of automotive flooded lead-acid batteries available in developing countries

1 Scope

This Technical Specification proposes simple, cheap, comparative tests in order to discriminate easily, in a panel of automotive flooded lead-acid batteries the most acceptable model for PV Individual Electrification Systems.

It could be particularly useful for project implementers to test in laboratories of developing countries, the capability of locally made car or truck batteries to be used for their project.

Furthermore battery testing specifications usually need too costly and too much sophisticated test equipment to be applied in developing countries laboratories.

The tests provided in this document allow to assess batteries performances according to the general specification of the project (see IEC 62257-2) and batteries associated with their Battery Management System (BMS) in a short time and with common technical means. They can be performed locally, as close as possible to the real site operating conditions.

The document provides also regulations and installation conditions to be complied with in order to ensure the life and proper operation of the installations as well as the safety of people living in proximity to the installation.

This document is not a type approval standard. It is a technical specification to be used as guidelines and does not replace any existing IEC standard on batteries.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-482, International Electrotechnical Vocabulary (IEV) – Part 482: Primary and secondary cells and batteries

IEC 61427, Secondary cells and batteries for photovoltaic energy systems (PVES) – General requirements and methods of test

IEC 62257 (all parts), Recommendations for small renewable energy and hybrid systems for rural electrification

3 Terms and definitions

For the purposes of this document, the terms and definitions for secondary cells and batteries given in IEC 60050-482 and the following apply.

3.1

electrochemical cell or battery

electrochemical system capable of storing in chemical form the electric energy received and which can give it back by conversion

3.2

secondary cell

cell which is designed to be electrically recharged

NOTE The recharge is accomplished by way of a reversible chemical reaction.

[IEV 482-01-03]

3.3

storage battery (secondary battery)

two or more secondary cells connected together and used as a source of electric energy

3.4

lead-acid battery

storage battery in which the electrodes are made mainly from lead and the electrolyte is a sulphuric acid solution

3.5

terminal (pole)

conductive part provided for the connection of a cell or battery to external conductors

3.6

density

commonly considered as the volumic mass, in kg / dm³

NOTE Density is also defined as a dimensionless magnitude expressing the ratio of the electrolyte mass to the water mass occupying the same volume at 4°C.

3.7

electrolyte

liquid or solid substance containing mobile ions which render it ionically conductive

NOTE The electrolyte may be liquid, solid or a gel.

[IEV 482-02-29]

3.8

dry charged battery

state of delivery of some types of secondary battery where the cells contain no electrolyte and the plates are dry and in a charged state

[IEV 482-05-30]

3.9

self-discharge

phenomenon by which a cell or battery loses energy in other ways than by discharge into and external circuit

[IEV 482-03-27]

3.10

observed battery capacity

quantity of electricity or electrical charge that a battery in high state of charge can deliver under the proposed test conditions. In practice, battery capacity is expressed in Amperehours(Ah)

3.11

nominal capacity

suitable approximate quantity of electricity, used to identify the capacity of a cell or a battery

NOTE This value is usually expressed in Ampere-hours (Ah).

3.12

rated capacity (of a cell or a battery)

quantity of electricity, declared by the manufacturer, which a cell or a battery can deliver under specified conditions after a full charge

NOTE 1 The rated capacity shown on the battery label is given for a discharge period which depends on the technology used in the battery.

NOTE 2 The capacity of a battery is higher when it is discharged slowly. For example, variations are in the order of 10 % to 20 % between a capacity measured over 5 hours and a capacity measured over 100 hours.

3.13

short-circuit current

maximum current given by a battery into a circuit of a very low resistance compared with that of the battery, under specified conditions

3.14

charge rate

electric current at which a secondary cell or battery is charged

NOTE The charge rate is expressed as the reference current $I_1 = C_1 n$ where C_1 is the rated capacity declared by the manufacturer and n is the time base in hours for which the rated capacity is declared.

[IEV 482-05-45]

3.15

ambient temperature

temperature of the medium in the immediate vicinity of a battery

3.16

gassing of a cell

evolution of a gas resulting from electrolysis of the water in the electrolyte of a cell

[IEV 482-05-51]

3.17

constant current charge

charge during which the electric current is maintained at a constant value regardless of the battery voltage or temperature

[IEV 482-05-38]

3.18

initial charge

commissioning charge given to a new battery to bring it to the fully charged state

3.19

cycling (of a cell or battery)

set of operations that is carried out on a secondary cell or battery and is repeated regularly in the same sequence

NOTE In a secondary battery these operations may consist of a sequence of a discharge followed by a charge of a charge followed by a discharge under specified conditions. This sequence may include rest periods.

[IEV 482-05-28]