

---

International Standard



8462/2

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

**Information processing — Data interchange on 6,30 mm  
(0.25 in) magnetic tape cartridge using GCR recording at  
394 ftpmm (10 000 ftpi), 39 cpm (1 000 cpi) —  
Part 2 : Streaming mode**

iTeH STANDARD PREVIEW

First edition — 1986-02-01

(standards.iteh.ai)

ISO 8462-2:1986

<https://standards.iteh.ai/catalog/standards/sist/1eb8fa3a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986>

---

UDC 681.327.64

Ref. No. ISO 8462/2-1986 (E)

**Descriptors** : data processing, information interchange, magnetic tapes, 6,3 mm magnetic tapes, cassettes for magnetic tapes, recording tracks, magnetic recording, representation of characters, track formats.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 8462/2 was prepared by Technical Committee ISO/TC 97, *Information processing systems*.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

## Contents

	Page
1 Scope and field of application .....	1
2 Conformance .....	1
3 References .....	1
4 Hexadecimal notation .....	1
5 Reference plane .....	2
6 Track geometry .....	2
6.1 Track location .....	2
6.2 Number of tracks .....	2
6.2.1 4-track format .....	2
6.2.2 9-track format .....	2
6.3 Track width .....	2
7 Recording .....	2
7.1 Method of recording .....	2
7.2 Physical recording densities .....	2
7.3 Average bit cell length variation .....	2
7.3.1 Average bit cell length .....	2
7.3.2 Long-term average bit cell length .....	2
7.3.3 Short-term average bit cell length .....	2
7.4 Flux transition spacing .....	2
7.4.1 Instantaneous flux transition spacing .....	2
7.4.2 Rate of change of average flux transition spacing .....	2
7.5 Signal amplitude of a recorded cartridge for data interchange .....	5
7.5.1 Average signal amplitude at nominal maximum density .....	5
7.5.2 Minimum signal amplitude .....	5
7.5.3 Maximum signal amplitude .....	5

iTeh STANDARD PREVIEW  
(standards.itih.ai)

<https://standards.itih.ai/catalog/standards/sist/1eb8fa3a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986>

ISO 8462-2:1986

<b>8</b>	Erasure .....	5
<b>9</b>	Recording offset angle .....	5
<b>10</b>	Use of tracks .....	5
<b>10.1</b>	4-track format .....	5
<b>10.2</b>	9-track format .....	5
<b>10.3</b>	Summary of requirements for use of tracks and Reference Burst .....	6
<b>11</b>	Coded representation of the data .....	6
<b>11.1</b>	General .....	6
<b>11.2</b>	Coding methods .....	6
<b>12</b>	Recording of coded characters on the tape .....	7
<b>13</b>	Track format .....	8
<b>13.1</b>	Data Block .....	8
<b>13.1.1</b>	Preamble .....	8
<b>13.1.2</b>	Block marker .....	8
<b>13.1.3</b>	Data .....	8
<b>13.1.4</b>	Block address .....	8
<b>13.1.5</b>	CRC (Cyclic Redundancy Check) .....	8
<b>13.1.6</b>	Postamble .....	9
<b>13.2</b>	File Mark Block .....	9
<b>13.3</b>	Control Blocks .....	9
<b>13.4</b>	Use of Control Blocks .....	9
<b>13.4.1</b>	Track 0 .....	9
<b>13.4.2</b>	Further uses of Control Blocks .....	9
<b>14</b>	End of recorded data .....	10
<b>15</b>	Re-writing operations .....	10
<b>15.1</b>	Re-writing rules .....	10
<b>15.2</b>	Rejection criterion .....	10
<b>16</b>	Updating operations .....	10
<b>17</b>	Reading operations .....	10
<b>Annex</b>	— Example of writing operations .....	11

iTech STANDARD PREVIEW  
(standards.itech.ai)

[ISO 8462-2:1986](https://standards.itech.ai/catalog/standards/sist/1eb8fa5a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986)

[https://standards.itech.ai/catalog/standards/sist/1eb8fa5a-05dd-47e8-9baa-](https://standards.itech.ai/catalog/standards/sist/1eb8fa5a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986)

[f2fc8516904c/iso-8462-2-1986](https://standards.itech.ai/catalog/standards/sist/1eb8fa5a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986)

# Information processing — Data interchange on 6,30 mm (0.25 in) magnetic tape cartridge using GCR recording at 394 ftpmm (10 000 ftpi), 39 cpmm (1 000 cpi) — Part 2 : Streaming mode

## 1 Scope and field of application

ISO 8462 specifies the characteristics of a tape cartridge loaded with magnetic tape 6,30 mm (0.25 in) wide intended for digital recording at physical recording densities of 252 ftpmm (6 400 ftpi) and 394 ftpmm (10 000 ftpi).

ISO 8462/1 specifies the mechanical, physical and magnetic properties of a 6,30 mm (0.25 in) wide magnetic tape cartridge and methods for testing the surface quality of the tape. It also specifies the environmental conditions under which the cartridge shall be tested and operated, and recommends conditions for storage.

This part of ISO 8462 specifies a recording method and a data format intended for use in the streaming mode of operation. Two alternative track formats are specified :

- a 4-track format, and
- a 9-track format.

ISO 8462/1 and ISO 8462/2 provide for the physical interchange of cartridges between data processing systems, and specify a data format. A labelling standard for tape cartridges used in the streaming mode is under study. The availability of such a labelling standard will provide for full data interchange between data processing systems.

NOTE — Numeric values in the SI and/or Imperial measurement system in this part of ISO 8462 may have been rounded off and therefore are consistent with, but not exactly equal to, each other. Either system may be used, but the two should be neither intermixed nor reconverted. The original design was made using the Imperial measurement system.

## 2 Conformance

A 6,30 mm (0.25 in) wide magnetic tape cartridge shall be in conformance with ISO 8462 if it meets either all mandatory requirements of both ISO 8462/1 and ISO 8462/2 specified for

the 4-track format or all mandatory requirements of both ISO 8462/1 and ISO 8462/2 specified for the 9-track format. The two formats shall not exist on the same cartridge.

In addition the code used shall conform with one of the codes specified in the documents referenced in clause 3.

## 3 References

ISO 646, *Information processing — ISO 7-bit coded character set for information interchange.*

ISO 2022, *Information processing — ISO 7-bit and 8-bit coded character sets — Code extension techniques.*

ISO 4873, *Information processing — 8-bit coded character set for information interchange.*

ISO 8462/1, *Information processing — Data interchange on 6,30 mm (0.25 in) magnetic tape cartridge using GCR recording at 394 ftpmm (10 000 ftpi), 39 cpmm (1 000 cpi) — Part 1 : Mechanical, physical and magnetic properties.*

## 4 Hexadecimal notation

Hexadecimal notation is used hereafter to denote the following bytes :

- (00) for (B8 to B1) = 0000 0000
- (01) for (B8 to B1) = 0000 0001
- (02) for (B8 to B1) = 0000 0010
- (03) for (B8 to B1) = 0000 0011
- (04) for (B8 to B1) = 0000 0100
- (05) for (B8 to B1) = 0000 0101
- (06) for (B8 to B1) = 0000 0110
- (07) for (B8 to B1) = 0000 0111

## 5 Reference plane

The Reference Plane shall be the top of the base plate (plane B in ISO 8462/1).

The Reference Edge shall be that edge of the tape which is nearer to the top of the base plate.

The location of the centrelines of the tracks is referred to the Reference Plane.

## 6 Track geometry

### 6.1 Track location

The positions of the nine tracks are defined by specifying the distance of their centrelines from the Reference Plane (see figure 1).

### 6.2 Number of tracks

#### 6.2.1 4-track format

In the 4-track format only tracks 0, 1, 2 and 3 are usable. Tracks are recorded sequentially from track 0 (see also 10.1).

#### 6.2.2 9-track format

In the 9-track format all nine tracks are usable. Tracks are recorded sequentially from track 0 (see also 10.2).

### 6.3 Track width

The recorded track width shall be

- for a 4-track format :  $0,914 \pm 0,025$  mm  
( $0.036 \pm 0.001$  in);
- for a 9-track format :  $0,343 \pm 0,013$  mm  
( $0.013 5 \pm 0.000 5$  in).

## 7 Recording

### 7.1 Method of recording

The recording method shall be the "Non Return To Zero Mark" (NRZ1) method where a ONE is represented by a change of direction of longitudinal magnetization.

### 7.2 Physical recording densities

The maximum nominal physical recording density shall be 394 ftpmm. The nominal bit cell length shall be 2,54  $\mu$ m.

Two other densities occur with the recording method described in this part of ISO 8462, namely :

197 ftpmm (5 000 ftpi)

131 ftpmm (3 333 ftpi)

### 7.3 Average bit cell length variations

#### 7.3.1 Average bit cell length

The average bit cell length is the sum of the distances between the flux transitions in  $n$  bit cells divided by  $(n - 1)$ . The tests below may be made in any continuously recorded pattern, provided that the first and the last bit cell each contain a flux transition.

#### 7.3.2 Long-term average bit cell length

The long-term average bit cell length is the average bit cell length taken over at least 900 000 bit cells. The long-term average bit cell length shall be within  $\pm 4$  % of the nominal bit cell length.

#### 7.3.3 Short-term average bit cell length

The short-term average bit cell length is the average bit cell length taken over 126 to 130 bit cells. The short-term average bit cell length shall be within  $\pm 7$  % of the long-term average bit cell length.

### 7.4 Flux transition spacing

In the following tests the results are expressed as the ratio of measurements; the effects of variations in long-term average bit-cell length and short-term average bit-cell length are thereby eliminated.

#### 7.4.1 Instantaneous flux transition spacing


The instantaneous spacing between flux transitions is influenced by the reading and writing processes, the pattern recorded (pulse-crowding effect) and other factors.

Instantaneous spacings between flux transitions shall satisfy the following conditions (see figure 2).

In a sequence of flux transitions defined by the bit pattern 11100111, for example as occurs in the Block Marker (see 13.1.2), the centre flux transition of each group of three ONEs is called a Reference Flux Transition. The spacing between any pair of contiguous ONE flux transitions shall not deviate by more than 35 % from the bit cell length  $d_1$  averaged over the five bit cells between reference flux transitions.


#### 7.4.2 Rate of change of average flux transition spacing

In a sequence of flux transitions defined by the data pattern 10100101 the rate of change of the average flux transition spacing, averaged over four flux transition spacings, shall not exceed 0,002 6 per flux transition spacing, i.e. in the pattern shown in figure 3.

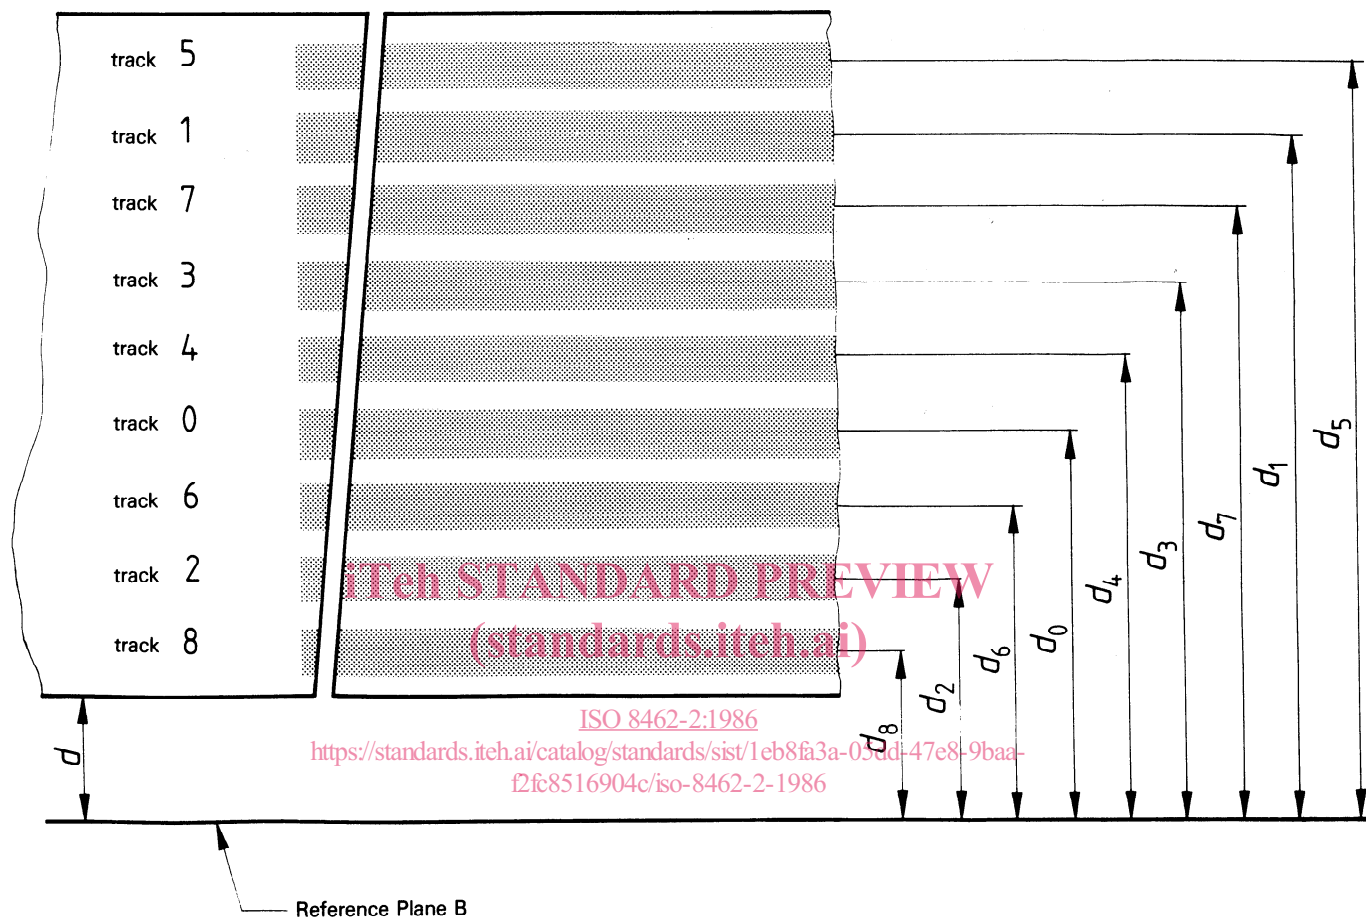

- $d = 1,773 \text{ mm (0.070 in)}$  nominal
- $d_0 = 4,369 \pm 0,107 \text{ mm (0.172 0} \pm 0.004 \text{ 2 in)}$
- $d_1 = 6,807 \pm 0,107 \text{ mm (0.268 0} \pm 0.004 \text{ 2 in)}$
- $d_2 = 3,150 \pm 0,107 \text{ mm (0.124 0} \pm 0.004 \text{ 2 in)}$
- $d_3 = 5,588 \pm 0,107 \text{ mm (0.220 0} \pm 0.004 \text{ 2 in)}$
- $d_4 = 4,978 \pm 0,107 \text{ mm (0.196 0} \pm 0.004 \text{ 2 in)}$
- $d_5 = 7,417 \pm 0,107 \text{ mm (0.292 0} \pm 0.004 \text{ 2 in)}$
- $d_6 = 3,759 \pm 0,107 \text{ mm (0.148 0} \pm 0.004 \text{ 2 in)}$
- $d_7 = 6,198 \pm 0,107 \text{ mm (0.244 0} \pm 0.004 \text{ 2 in)}$
- $d_8 = 2,540 \pm 0,107 \text{ mm (0.100 0} \pm 0.004 \text{ 2 in)}$

Figure 1

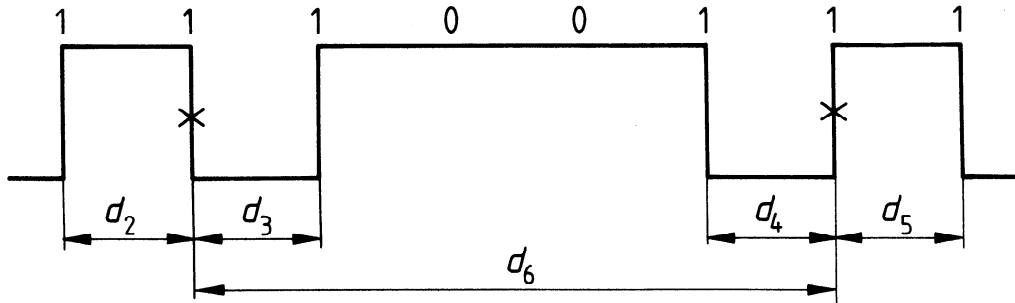

× denotes a reference flux transition


- $1,35 d_1 > d_2 > 0,65 d_1$
- $1,35 d_1 > d_3 > 0,65 d_1$
- $1,35 d_1 > d_4 > 0,65 d_1$
- $1,35 d_1 > d_5 > 0,65 d_1$
- $d_1 = 0,20 d_6$

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

Figure 2

ISO 8462-2:1986

<https://standards.iteh.ai/catalog/standards/sist/1eb8fa3a-05dd-47e8-9baa-f2fc8516904c/iso-8462-2-1986>

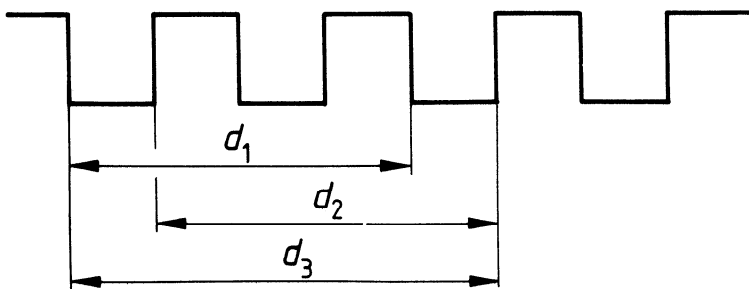

$$\left| \frac{d_1}{4} - \frac{d_2}{4} \right| \leq 0,0026 \frac{d_3}{5}$$

Figure 3



## 7.5 Signal amplitude of a recorded cartridge for data interchange

For the 4-track format the width of the track read shall be  $0,508 \pm 0,025$  mm ( $0.020 \pm 0.001$  in) and shall be within the recorded track.

For the 9-track format the track read shall extend over the whole width of the recorded track.

When performing the tests, the output or resultant signal shall be measured on the same pass for both the Standard Amplitude Reference Tape Cartridge and the tape under test (i.e. the read-while-write pass or the first forward-read pass) on the same equipment. The signal amplitude shall be measured at a point in the read chain at which the signal is proportional to the rate of change of the flux induced in the head.

After writing, the cartridge shall meet the following requirements.

### 7.5.1 Average signal amplitude at nominal maximum density

At the nominal maximum density of 394 ftpmm (10 000 ftpi) the average peak-to-peak signal amplitude of any track shall be within + 50 % and - 35 % of  $SRA_{394}$  (see ISO 8462/1). This averaging shall be made over the central 100 flux transitions of any 120 contiguous flux transitions in a block and over at least 100 blocks.

### 7.5.2 Minimum signal amplitude

When interchanged, a tape shall not contain in the valid information area any flux transition the base-to-peak signal amplitude of which is less than 25 % of half of  $SRA_{394}$  (see ISO 8462/1).

### 7.5.3 Maximum signal amplitude

The peak-to-peak signal amplitude at 131 ftpmm (3 333 ftpi) shall be less than three times  $SRA_{394}$ .

## 8 Erasure

The tape shall be AC erased.

After erasure any remaining signal amplitudes at, or below, twice the frequency corresponding to the maximum physical recording density shall be less than 3 % of  $SRA_{394}$ .

## 9 Recording offset angle

On any track the angle that a flux transition across the track makes with a line perpendicular to Reference Plane B shall not exceed 9' of arc.

## 10 Use of tracks

### 10.1 4-track format

10.1.1 Each track shall be a data track and shall be written serially.

10.1.2 Tracks shall be recorded in the numerical order of their track numbers, starting with track 0.

10.1.3 Tracks 0 and 2 shall be recorded in the direction from the BOT marker to the EOT marker. Tracks 1 and 3 shall be recorded in the direction from the EOT marker to the BOT marker.

10.1.4 On track 0 a Reference Burst recorded at the maximum nominal recording density of 394 ftpmm (10 000 ftpi) shall be written between the BOT marker and data recorded on track 0. This Reference Burst shall commence not more than 381 mm (15 in) from the BOT marker and extend for a minimum length of 76,2 mm (3 in) and a maximum length of 101,6 mm (4 in) beyond the LP marker.

10.1.5 On tracks 0 and 2 data shall commence not less than 76,2 mm (3 in) and not more than 101,6 mm (4 in) after the LP marker. No data for interchange shall be recorded beyond 914,4 mm (36 in) after the EW marker.

10.1.6 On tracks 1 and 3 data shall commence not less than 25,4 mm (1 in) and not more than 50,8 mm (2 in) after the EW marker.

On track 1 the last Data or File Mark Block written shall end not more than 101,6 mm (4 in) and not less than 2,54 mm (0.1 in) before the LP marker, measured from the centre of the hole.

If Control Blocks are used at the end of tracks [see 13.4.2 b)], they shall be recorded starting at least 2,54 mm (0.1 in) after the LP marker on track 1. A Long Preamble shall be recorded between the last Data or File Mark Block and the Control Block.

On track 3 the last block written shall end not more than 685,8 mm (27 in) after the LP marker.

### 10.2 9-track format

10.2.1 Each track shall be a data track and shall be written serially.

10.2.2 Tracks shall be recorded in the numerical order of their track numbers, starting with track 0.

10.2.3 Tracks 0, 2, 4, 6 and 8 shall be recorded in the direction from the BOT marker to the EOT marker. Tracks 1, 3, 5 and 7 shall be recorded in the direction from the EOT marker to the BOT marker.

10.2.4 On track 0 a Reference Burst recorded at the maximum nominal recording density of 394 ftpmm (10 000 ftpi) shall be written between the BOT marker and data recorded on track 0. This Reference Burst shall commence not more than 381 mm (15 in) from the BOT marker and extend for a minimum length of 76,2 mm (3 in) and a maximum length of 101,6 mm (4 in) beyond the LP marker.

10.2.5 On tracks 0, 2, 4, 6 and 8 data shall commence not less than 76,2 mm (3 in) and not more than 101,6 mm (4 in) after the LP marker. No data for interchange shall be recorded beyond 914,4 mm (36 in) after the EW marker.