

INTERNATIONAL STANDARD

ISO
8611

Second edition
1991-06-15

General-purpose flat pallets for through transit of goods — Test methods

iTeh STANDARD PREVIEW
*Palettes plates d'usage général pour le transport de marchandises —
Méthodes d'essai*
(standards.iteh.ai)

ISO 8611:1991

<https://standards.iteh.ai/catalog/standards/sist/63411ab6-3409-4abc-a6df-282eb51f480f/iso-8611-1991>

INTERNATIONAL

ISO



Reference number
ISO 8611:1991(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8611 was prepared by Technical Committee ISO/TC 51, *Pallets for unit load method of materials handling*.

This second edition cancels and replaces the first edition (ISO 8611:1988), and a wing pallet test (8.3) has been added.

<https://standards.iso.int/catalog/standards/sist/63411ab6-3409-4abc-a6df-282eb51f480f/iso-8611-1991>

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

The tests specified in this International Standard are particularly appropriate for testing pallet prototypes. They may also be valuable in point-of-manufacture, quality assurance and field testing of pallets, but it is not intended that these tests be used for research purposes. Tests to establish data for pallet research will normally be considerably more comprehensive than those contained in this International Standard.

The majority of pallets are of conventional timber design. The tests specified in this International Standard are, to a large degree, applicable to such pallets. As new designs and materials, particularly plastics, are introduced, a pallet which meets the requirements for conventional timber designs may, however, be unfit for use in normal transit by virtue of undesirable properties. In such instances, the inclusion of special tests and special climatic conditioning prior to testing may have to be considered. Extension of the duration of the loading tests may also be desirable.

Suggested levels of performance in relation to the tests specified in this International Standard are given in ISO/TR 10233:1989, *General-purpose flat pallets for through transit of goods — Performance requirements*.

<https://standards.iteh.ai/standards/iso-8611-1991>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

[ISO 8611:1991](#)

<https://standards.iteh.ai/catalog/standards/sist/63411ab6-3409-4abc-a6df-282eb51f480f/iso-8611-1991>

General-purpose flat pallets for through transit of goods — Test methods

1 Scope

This International Standard specifies test methods for general-purpose flat pallets. The tests are principally intended for the evaluation of existing pallets or of new designs of pallet in relation to their designed load capacity.

NOTE 1 The tests may also be of value in

- a) testing individual pallet components;
- b) development of prototype pallets;
- c) research into basic performance (though these tests are not as comprehensive as most research requires; see note 7);
- d) evaluation of pallets from in-use failure situations;
- e) testing at point of manufacture (unconditioned).

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 445:1984, *Pallets for materials handling — Vocabulary*.

ISO 2244:1985, *pendulum Packaging — Complete, filled transport packages — Horizontal impact tests (horizontal or inclined plane test test)*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 445 apply.

4 Measurement and checking of test pallets

4.1 Pallets selected for testing shall be checked to ensure that materials, construction and dimensions conform with any stated specification (see clause 10).

4.2 The mass of each pallet shall also be determined and recorded, together with the moisture content of individual components at the time of weighing (where appropriate).

5 Number of replicates and sequence of testing

When evaluating a pallet in relation to its designed load capacity, a minimum of three replicates shall be tested. The complete sequence of tests shall be carried out consecutively in the exact order laid down in this International Standard. Wing pallets shall undergo all eight tests listed in clauses 8 and 9; other types of pallets shall undergo seven tests, i.e. excluding the test described in 8.3.

For each complete sequence of tests, the same pallet shall be used, including those tests where it is necessary to test the pallet across both of its horizontal axes.

6 Conditioning

6.1 Temperature and moisture are known to affect pallets of a number of materials both under test and in the field. Conditioning prior to testing takes account of the reaction of the pallet material to the test environment and ensures valid and repeatable test results.

A further purpose of conditioning is to predict the behaviour of identical pallets under the extreme conditions that may be encountered in transit while loaded with goods.

6.2 Table 1 includes details of conditioning environments relevant to pallet usage. They shall be applied as follows:

- a) the moisture content of timber pallets should not be less than 18 %. If the moisture content is below this value, the test may proceed provided that the moisture content of critical components is recorded every 24 h until completion of the test programme;
- b) at least one specimen of a plastics pallet shall be conditioned to environment A and a further pallet to environment B;
- c) at least one specimen of paper-based and wood-based pallets shall be conditioned to environment C or D.

NOTE 2 Composite pallets consisting of two or more materials, for example hollow plastics blocks supporting plywood decks, may have to undergo more extensive conditioning.

6.3 Where conditioning is relevant and the whole test laboratory cannot be maintained at the required level, then tests shall commence within 1 h after the pallet has been removed from the conditioning chamber. When environments A and B apply, the tests shall commence immediately after the pallet has been removed from the conditioning chamber.

Immediately after each individual test, specimens subjected to environments A or B shall be returned to the conditioning chamber for a minimum of 1 h.

6.4 For wood or wood-based materials, a record shall be made of the moisture content in selected components at the beginning of the full test programme.

7 Accuracy of test apparatus

7.1 Test apparatus described in clauses 8 and 9 shall satisfy the following requirements:

- a) in the design of the test equipment, the tolerances on all dimensions shall be ± 2 %;
- b) the resolution/accuracy of measuring equipment for tests shall be better than $\pm 0,5$ mm;
- c) the accuracy of positioning of every component, excluding the test load, shall be ± 2 mm;
- d) the accuracy of positioning of the centre of gravity of the test loads referred to in clause 8 shall be ± 20 mm;
- e) the total mass of the test loads used shall be within ± 3 % of the predetermined value.

7.2 No part of any test rig shall deflect an amount greater than 2 mm when under maximum test load.

7.3 The inclined-plane apparatus shall be constructed as specified in ISO 2244.

Table 1 — Conditioning environments

Conditioning environment	Atmosphere	Temperature °C	Relative humidity %	Time h	Pallet material
No conditioning required [see 6.2 a)]					Unprocessed (sawn) timber with metal fastenings
A	Air	40 ± 2	—	24	Plastics
B	Air	— 25 ± 3	—		
C	Air	25 ± 5	90 ± 5	48	Paper-based and processed wood (for example plywood, particle board) ¹⁾
D	Water	20 + 5	—	24	
No conditioning required					All metal

1) Includes any pallet containing or assembled with adhesive.

8 Static tests

For all static tests described in 8.1 to 8.4, the test load applied shall include in all cases the mass of any load board and load applicators.

8.1 Stacking test

The purpose of this test is to determine the compression strength of the pallet or pallet corner block to localized vertical loads.

8.1.1 Deformation measurements

When tested in accordance with the method specified in 8.1.2, the change in the height, y , of the top deck at point A, as shown in figure 1, relative to the ground (or test frame) shall be recorded

- at the datum load (see 8.1.2);
- at the beginning and end of the full-load period;
- upon unloading, at the datum load (see 8.1.2) every 5 min until successive readings are identical (limited to a maximum period of 1 h).

The deflection at A is established by taking the mean value of measurements at points A_1 and A_2 (see figure 1).

Similar measurements shall be made relating to point B when the test is repeated on the diagonally opposite corner (see 8.1.2).

8.1.2 Procedure

Place the pallet in a normal position on a flat, hard, rigid, horizontal surface. Place a rigid load applicator of dimensions 200 mm x 200 mm x 25 mm over an outer block [as shown in figure 1 a)] or, in the case of a stringer pallet, over one end of a stringer [as shown in figure 1 b)].

Gradually apply the test load at a uniform rate from 0 to $0,25R$, where R is the designed load capacity of the pallet, assuming an evenly and uniformly distributed load. This shall be the datum for subsequent deflection measurements.

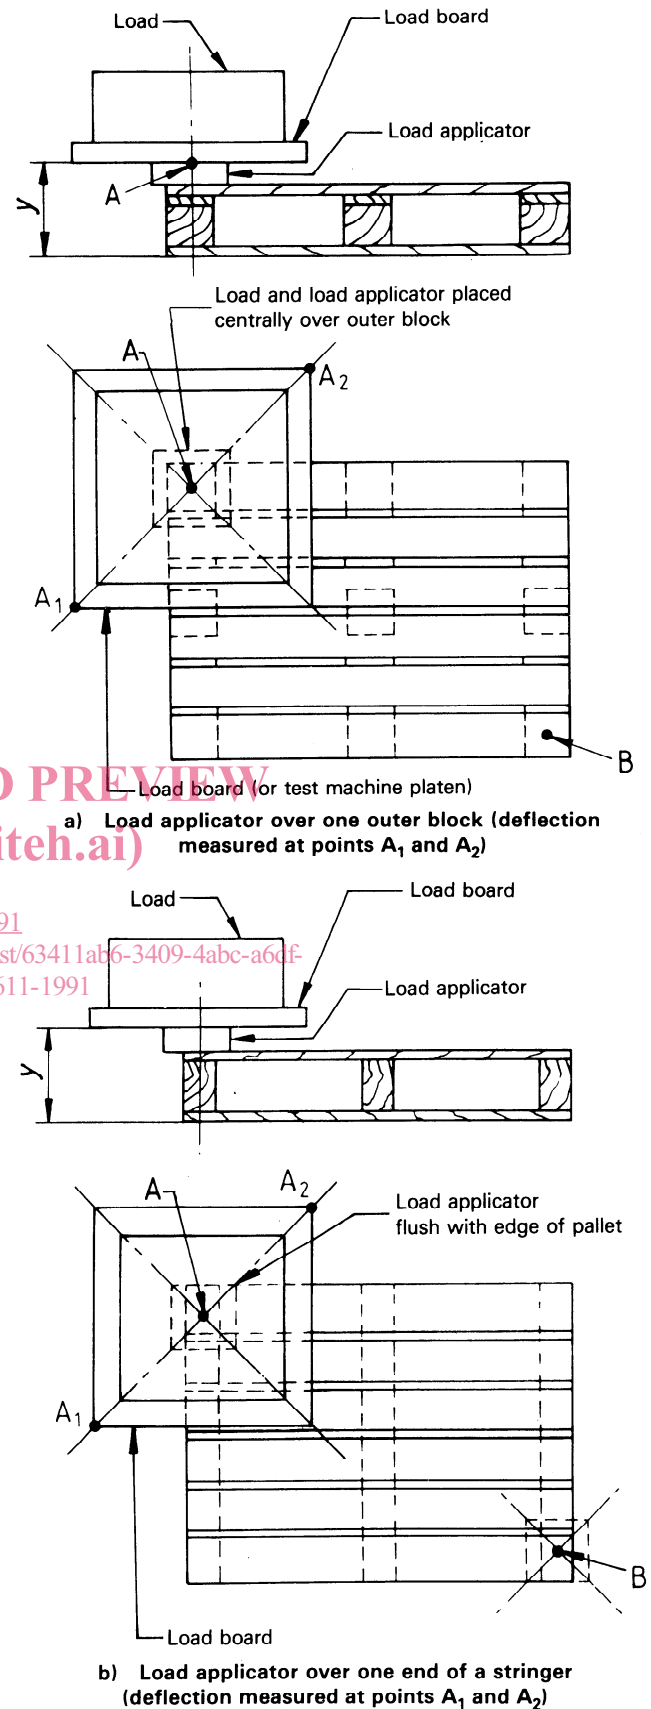


Figure 1 -- Stacking test

Apply the full test load of $1,1R$, per loaded block, for not less than 1 min and not more than 5 min. If deadweight is used for the test load, it shall be symmetrically built up during loading. Keep the full test load in place for a period dependent on the pallet material (see table 2).

Reduce the test load to the datum load for the necessary period [see 8.1.1 c)].

Take deflection measurements relating to point A (see 8.1.1).

Repeat the test at point B (see figure 1) so that the test shall have been carried out on two diagonally opposed corners of the pallet. Take a further set of deflection measurements relating to point B (see 8.1.1).

NOTE 3 Alternatively the test may be carried out on several corners simultaneously with an appropriate increase in full test load (i.e. $2,2R$ on two corners or $4,4R$ on four corners).

Deflection measurements shall be made at all the corners under test.

Table 2 — Test load duration for static tests

Pallet material	Test period h
Unprocessed (sawn) timber with metal fastenings	2
Plastics	24
Paper-based and processed wood (for example plywood, particle board)	24
All metal	2
Composite containing plastics	24
Pallet assembled with adhesives	24

8.2 Bending test

The purpose of this test is to determine the stiffness and flexural strength of the complete pallet.

8.2.1 Deflection measurements

When tested in accordance with the method specified in 8.2.2, the deflection at points A and B, as shown in figure 2, measured relative to the upper (or lower) surface of the top or bottom decks and the ground (or test frame) shall be recorded

- a) at the datum load (see 8.2.2);
- b) at the beginning and end of the full-load period;
- c) upon unloading, at the datum load (see 8.2.2), every 5 min until successive readings are identical (limited to a maximum period of 1 h).

The distance between the decks, h , directly under the load applicators shall be measured so that data on the minimum fork entry heights under full load can be obtained.

Similar measurements shall be made at points C and D and between the decks when the test is repeated along the second horizontal axis of the pallet (see 8.2.2).

8.2.2 Procedure

Place the pallet, top deck uppermost, on square (or semi-circular) section supports positioned with their inside edges (or centre lines) 75 mm from the outer edge of the pallet (see figure 2). The load applicators shall be positioned at $0,25l_1$ when measured as shown, where l_1 is the distance between the inside edges (square section) or centre lines (semi-circular section) of the pallet supports (see figure 2).

Load applicators and supports shall be flush with or project beyond the pallet. Edges shall be relieved with 2 mm radii as shown in figure 3.

Gradually apply the test load at a uniform rate from 0 to $0,1R$. This shall be the datum for subsequent deflection measurements. Apply the full test load of $1,25R$ for not less than 1 min and not more than 5 min. If deadweight is used for the test load, it shall be symmetrically built up during loading. Keep the full test load in place for a period dependent on the pallet material (see table 2).

Reduce the test load to the datum load for the necessary period [see 8.2.1 c)].

Take deflection measurements at points A and B (see 8.2.1).

Repeat the test along the second horizontal axis of the pallet (i.e. both length and width are tested) with the load applicators positioned at $0,25l_2$ when measured as shown from the inside edges or centre lines of the pallet supports, where l_2 is the distance between inside edges or centre lines of the pallet supports (see figure 2 and figure 3).

A further set of deflection measurements shall be taken at points C and D (see 8.2.1).

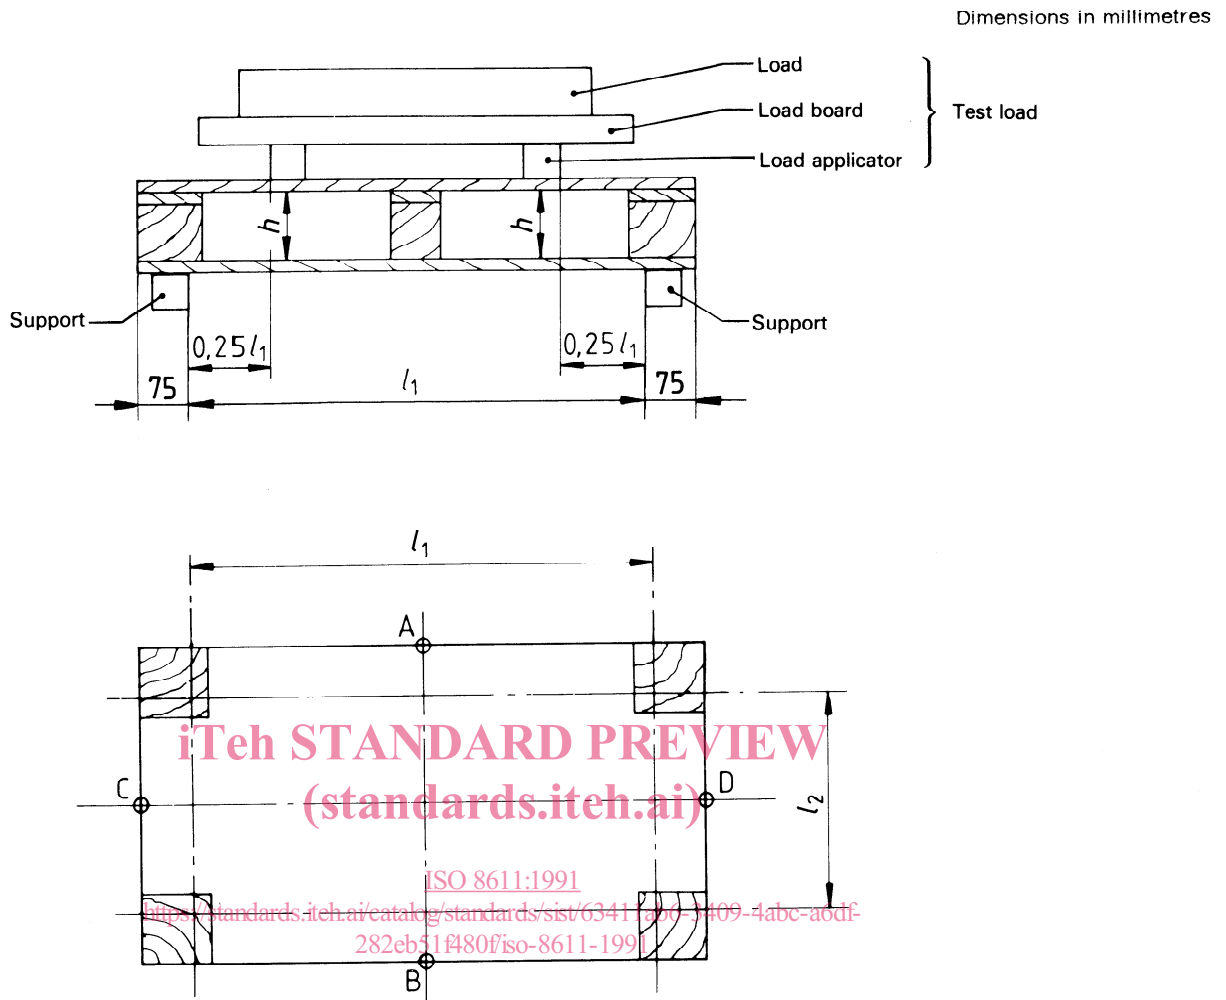


Figure 2 — Bending test (see also figure 3)

8.3 Wing pallet test

The purpose of this test is to determine the stiffness and flexural strength of a complete wing pallet when lifted with bar slings. The test shall be carried out on wing pallets only, immediately after the bending test described in 8.2.

8.3.1 Deflection measurements

When tested in accordance with the method specified in 8.3.2, the deflection at points A and B, as shown in figure 4, measured relative to the upper (or lower) surface of the top or bottom decks and the ground (or test frame) shall be recorded

- a) at the datum load (see 8.3.2);
- b) at the beginning and end of the full-load period;

- c) upon unloading, at the datum load (see 8.3.2), every 5 min until successive readings are identical (limited to a maximum period of 1 h).

8.3.2 Procedure

Place the wing pallet, top deck uppermost, on supports positioned beneath the wings of the top deck such that each support touches the outer stringer/bearer or blocks. Each load applicator shall be positioned such that the dimension from the inside edge of the support to the outside edge of the load applicator shall be $0,25l_1$, as shown in figure 4.

Load applicators and supports are as described in 8.2.2.

NOTE 4 The test simulates the effect of bar slings but not rope slings.

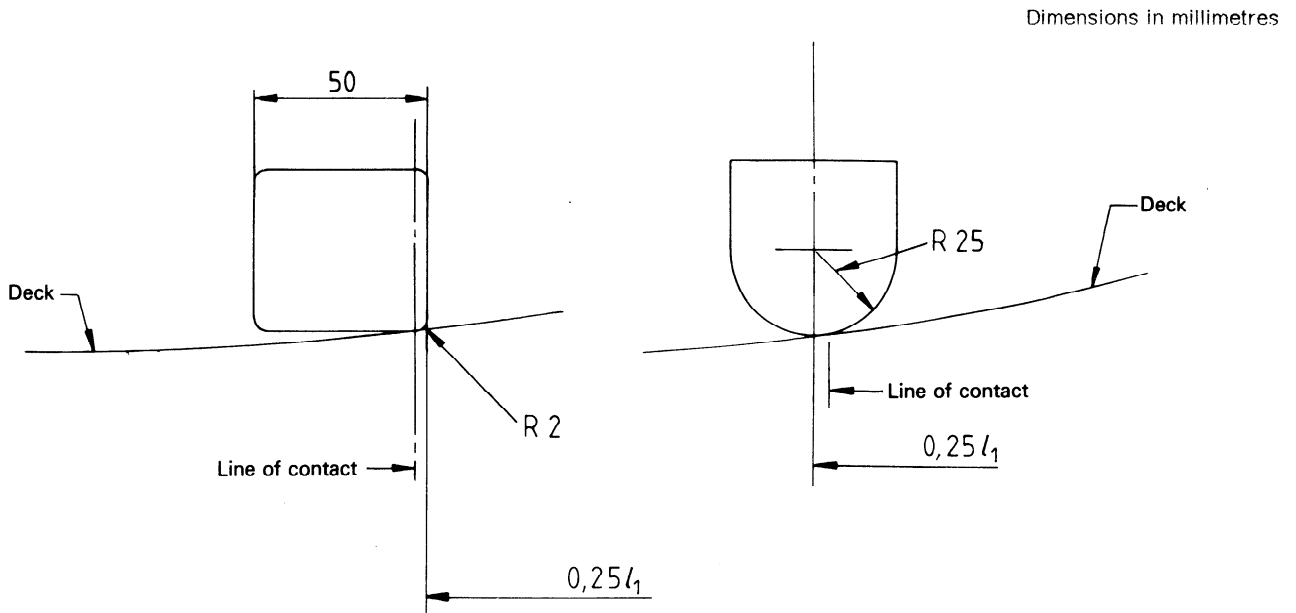


Figure 3 — Alternative pallet supports and/or load applicators

iTeh STANDARD PREVIEW
(standards.iteh.ai)

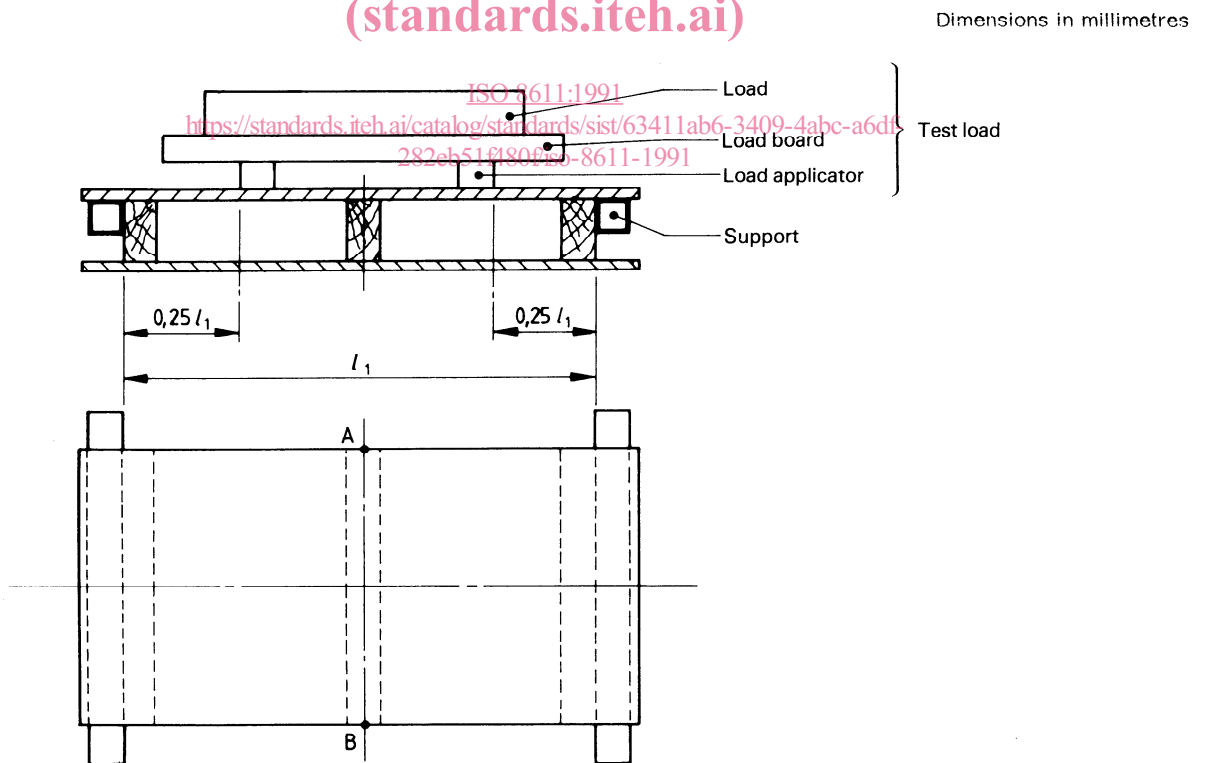


Figure 4 — Wing pallet test (see also figure 3)

Gradually apply the test load at a uniform rate from 0 to $0,1R$. This shall be the datum for subsequent deflection measurements. Apply the full test load of $1,25R$ for not less than 1 min and not more than 5 min. If deadweight is used for the test load, it shall be symmetrically built up during loading. Keep the full test load in place for a period dependent on the pallet material (see table 2).

Reduce the test load to the datum load for the necessary period [see 8.3.1 c)].

Take deflection measurements at points A and B (see 8.3.1).

8.4 Bottom deck test

The purpose of this test is to determine the stiffness and flexural strength of the bottom deckboards between support points.

8.4.1 Deflection measurements

When tested in accordance with the method specified in 8.4.2, the deflections at points A, B, C and D, as shown in figure 5, measured relative to the upper or lower surface of the bottom deck and the ground (or test frame) shall be recorded

- a) at the datum load (see 8.4.2);
- b) at the beginning and end of the full-load period;
- c) upon unloading, at the datum load every 5 min until successive readings are identical (limited to a maximum period of 1 h).

Similar measurements shall be made at points E, F, G and H, as shown in figure 5, when the test is repeated on the second horizontal axis of the pallet (see 8.4.2).

8.4.2 Procedure

Place the top deck of the pallet downwards on a flat, hard, rigid horizontal surface and place two square or semi-circular section load applicators, as shown in figure 5, so that the centres of the load applicators are midway between the blocks or the stringers (i.e. at $0,5l_3$, $0,5l_4$ or $0,5l_5$). The load applicators shall project over or be flush with the edge of the pallet base and shall be symmetrically placed about the centre line of the pallet.

Gradually apply the test load at a uniform rate from 0 to $0,1R$. This shall be the datum for subsequent deflection measurements. Apply the full test load of $1,15R$, in not less than 1 min and not more than 5 min. If deadweight is used for the test load, it shall

be symmetrically built up during loading. Keep the full test load in place for a period depending on the pallet material (see table 2).

Reduce the test load to the datum load for the necessary period (see 8.4.1).

Take deflection measurements at points A, B, C and D (see 8.4.1).

For all except stringer pallets, repeat the test along the second horizontal axis of the pallet (i.e. both length and width shall be tested) with the centres of the load applicators placed midway between the blocks (i.e. at $0,5l_4$) [see figure 5 a)].

A further set of deflection measurements shall be taken at points E, F, G and H (see 8.4.1).

9 Impact tests

The purpose of impact tests is to simulate normal levels of shock load which are typically transmitted to pallets in through-transit and to determine the resistance of the pallet to such loads.

9.1 Inclined-plane tests

For all three inclined-plane tests, the test load shall be $0,075R$. This test load comprises the load box having a plan size of 600 mm \times 800 mm (see figure 6) plus the load in the box, which shall be placed in the box in a position dependent upon the individual test requirements described below. The detachable supporting edges shall be at least as long as the pallet under test. The test load shall not include the weight of the dolly.

For the first two inclined-plane tests (see 9.1.1 and 9.1.2), the dolly is raised 1 000 mm up the incline. For the third test (see 9.1.3), it is raised only 750 mm from the point of impact before release. Each test requires three impacts.

9.1.1 Shear test

The purpose of this test is to determine the shear resistance between top and bottom decks.

9.1.1.1 Measurements

When tested in accordance with the method specified in 9.1.1.2, the deflection changes x and y shall be measured between points A and B and between points C and D where construction makes this possible (see figure 7). The changes shall be recorded at a number of positions along the impacted surface.