

INTERNATIONAL STANDARD

IEC 60747-16-1

Edition 1.1

2007-03

Edition 1:2001 consolidated with amendment 1:2007

Semiconductor devices –

**Part 16-1:
Microwave integrated circuits –
Amplifiers**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 60747-16-1:2001+AMD1:2007 CSV](#)

<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>



Reference number
IEC 60747-16-1:2001+A1:2007(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (http://www.iec.ch/searchpub/cur_fut.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published** <https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-b91c0/iec-60747-16-1-2001amd1-2007-csv>

This summary of recently issued publications (http://www.iec.ch/online_news/justpub/jp_entry.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 60747-16-1

Edition 1.1

2007-03

Edition 1:2001 consolidated with amendment 1:2007

Semiconductor devices –

Part 16-1: Microwave integrated circuits – Amplifiers

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 60747-16-1:2001+AMD1:2007 CSV](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv)

<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>

© IEC 2007 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Terminology	6
4 Essential ratings and characteristics.....	9
4.1 General.....	9
4.2 Application related description.....	10
4.3 Specification of the function	10
4.4 Limiting values (absolute maximum rating system)	12
4.5 Operating conditions (within the specified operating temperature range)	14
4.6 Electrical characteristics.....	14
4.7 Mechanical and environmental ratings, characteristics and data.....	16
4.8 Additional information.....	16
5 Measuring methods	17
5.1 General.....	17
5.2 Linear (power) gain (G_{lin})	17
5.3 Linear (power) gain flatness (ΔG_{lin})	19
5.4 Power gain (G_p).....	20
5.5 (Power) gain flatness (ΔG_p)	20
5.6 (Maximum available) gain reduction (ΔG_{red})	21
5.7 Limiting output power ($P_{o(ltg)}$).....	22
5.8 Output power (P_o)	23
5.9 Output power at 1 dB gain compression ($P_{o(1dB)}$)	24
5.10 Noise figure (F)	25
5.11 Intermodulation distortion (two-tone) (P_1/P_n).....	27
5.12 Power at the intercept point (for intermodulation products) ($P_{n(IP)}$)	29
5.13 Magnitude of the input reflection coefficient (input return loss) ($ S_{11} $)	30
5.14 Magnitude of the output reflection coefficient (output return loss) ($ S_{22} $)	31
5.15 Magnitude of the reverse transmission coefficient (isolation) ($ S_{12} $).....	35
5.16 Conversion coefficient of amplitude modulation to phase modulation ($\alpha_{(AM-PM)}$)	36
5.17 Group delay time ($t_{d(grp)}$).....	38
5.18 Power added efficiency	39
5.19 n th order harmonic distortion ratio (P_1/P_{nth})	41
5.20 Output noise power (P_N).....	42
5.21 Spurious intensity under specified load VSWR (P_o/P_{sp})	44
5.22 Adjacent channel power ratio ($P_{o(mod)}/P_{adj}$)	46
6 Verifying methods.....	49
6.1 Load mismatch tolerance (Ψ_L).....	49
6.2 Source mismatch tolerance (Ψ_S)	52
6.3 Load mismatch ruggedness (Ψ_R).....	55

Figure 1 – Circuit for the measurements of linear gain	17
Figure 2 – Basic circuit for the measurement of the noise figure	25
Figure 3 – Basic circuit for the measurements of two-tone intermodulation distortion	27
Figure 4 – Circuit for the measurements of magnitude of input/output reflection coefficient (input/output return loss)	30
Figure 5 – Circuit for the measurement of output reflection coefficient	33
Figure 6 – Circuit for the measurement of isolation	35
Figure 7 – Basic circuit for the measurement of $\alpha_{(AM-PM)}$	36
Figure 8 – Circuit for the measurement of the power added efficiency.....	39
Figure 9 – Circuit for the measurements of the n th order harmonic distortion ratio	41
Figure 10 – Circuit diagram for the measurement of the output noise power	43
Figure 11 – Circuit diagram for the measurement of the spurious intensity.....	45
Figure 12 – Circuit for the measurement of the adjacent channel power ratio.....	47
Figure 13 – Circuit for the verification of load mismatch tolerance in method 1	50
Figure 14 – Circuit for the verification of load mismatch tolerance in method 2	51
Figure 15 – Circuit for the verification of source mismatch tolerance in method 1.....	53
Figure 16 – Circuit for the verification of source mismatch tolerance in method 2.....	54
Figure 17 – Circuit for the verification of load mismatch ruggedness	55

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 60747-16-1:2001+AMD1:2007 CSV](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv)

<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SEMICONDUCTOR DEVICES –

Part 16-1: Microwave integrated circuits – Amplifiers

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60747-16-1 has been prepared by subcommittee 47E: Discrete semiconductor devices, of IEC technical committee 47: Semiconductor devices.

This consolidated version of IEC 60747-16-1 consists of the first edition (2001) [documents 47E/200/FDIS and 47E/204/RVD] and its amendment 1 (2007) [documents 47E/305/FDIS and 47E/317/RVD].

The technical content is therefore identical to the base edition and its amendment and has been prepared for user convenience.

It bears the edition number 1.1.

A vertical line in the margin shows where the base publication has been modified by amendment 1.

The committee has decided that the contents of the base publication and its amendments will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 60747-16-1:2001+AMD1:2007 CSV](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv)

<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>

SEMICONDUCTOR DEVICES –

Part 16-1: Microwave integrated circuits – Amplifiers

1 Scope

This part of IEC 60747 provides the terminology, the essential ratings and characteristics, as well as the measuring methods for integrated circuit microwave power amplifiers.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60617:2001, *Graphical symbols for diagrams*

IEC 60747-1:2006, *Semiconductor devices – Part 1: General*

IEC 60747-4:-, *Semiconductor devices – Discrete devices – Part 4: Microwave diodes and transistors*¹

IEC 60747-7:2000, *Semiconductor devices – Part 7: Bipolar transistors*

IEC 60747-16-2:2001, *Semiconductor devices – Part 16-2: Microwave integrated circuits – Frequency prescalers*

IEC 60747-16-4:2004, *Semiconductor devices – Part 16-4: Microwave integrated circuits – Switches*

IEC 60748-2:1997, *Semiconductor devices – Integrated circuits – Part 2: Digital integrated circuits*

IEC 60748-3:1986, *Semiconductor devices – Integrated circuits – Part 3: Analogue integrated circuits*

IEC 60748-4:1997, *Semiconductor devices – Integrated circuits – Part 4: Interface integrated circuits*

IEC/TS 61340-5-1:1998, *Electrostatics - Part 5-1: Protection of electronic devices from electrostatic phenomena - General requirements*

IEC/TS 61340-5-2:1999, *Electrostatics - Part 5-2: Protection of electronic devices from electrostatic phenomena - User guide*

3 Terminology

3.1

linear (power) gain G_{lin}

power gain in the linear region of the power transfer curve P_o (dBm) = $f(P_i)$

NOTE In this region, ΔP_o (dBm) = ΔP_i (dBm).

¹ The second edition of IEC 60747-4, which is cited in this standard, and to which terms introduced in this amendment refer, is currently in preparation (ADIS).

3.2**linear (power) gain flatness ΔG_{lin}**

power gain flatness when the operating point lies in the linear region of the power transfer curve

3.3**power gain G_p , G**

ratio of the output power to the input power

NOTE Usually the power gain is expressed in decibels.

3.4**(power) gain flatness ΔG_p**

difference between the maximum and minimum power gain for a specified input power in a specified frequency range

3.5**(maximum available) gain reduction ΔG_{red}**

difference in decibels between the maximum and minimum power gains that can be provided by the gain control

3.6 Output power limiting**3.6.1****output power limiting range**

range in which, for rising input power, the output power is limiting

NOTE For specification purposes, the limits of this range are specified by specified lower and upper limit values for the input power.

<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>

3.6.2**limiting output power $P_{o(ltg)}$**

output power in the range where it is limiting

3.6.3**limiting output power flatness $\Delta P_{o(ltg)}$**

difference between the maximum and minimum output power in the output power limiting range:

$$\Delta P_{o(ltg)} = P_{o(ltg,max)} - P_{o(ltg,min)}$$

3.7**intermodulation distortion P_1/P_n**

ratio of the fundamental component of the output power to the n th order component of the output power, at a specified input power

3.8**power at the intercept point (for intermodulation products) $P_{n(IP)}$**

output power at intersection between the extrapolated output powers of the fundamental component and the n th order intermodulation components, when the extrapolation is carried out in a diagram showing the output power of the components (in decibels) as a function of the input power (in decibels)

3.9**magnitude of the input reflection coefficient**

(input return loss)

$|S_{11}|$

see 3.5.2.1 of IEC 60747-7

3.10**magnitude of the output reflection coefficient**

(output return loss)

 $|S_{22}|$

see 3.5.2.2 of IEC 60747-7

3.11**magnitude of the reverse transmission coefficient**

(isolation)

 $|S_{12}|$

see 3.5.2.4 of IEC 60747-7

3.12**conversion coefficient of amplitude modulation to phase modulation $\alpha_{(AM-PM)}$**

quotient of

the phase deviation of the output signal (in degrees) by

the change in input power (in decibels) producing it

3.13**group delay time $t_{d(grp)}$**

ratio of the change, with angular frequency, of the phase shift through the amplifier

NOTE Usually group delay time is very close in value to input-to-output delay time.

3.14 **n th order harmonic distortion ratio P_1/P_{nth}** ratio of the power of the fundamental frequency measured at the output port of the device to the power of the n th order harmonic component measured at the output port for a specified output power

iTech STANDARD PREVIEW
(standards.iteh.ai)
IEC 60747-16-1:2001+AMD1:2007 CSV
<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv>

3.15**output noise power P_N**

maximum noise power measured at the output port of the device within a specified bandwidth in a specified frequency range for a specified output power

3.16**spurious intensity under specified load VSWR P_o/P_{sp}**

ratio of the power of the fundamental frequency measured at the output port of the device to the maximum spurious power measured at the output port under specified load VSWR

3.17**output power** P_o

see 3.3 of IEC 60747-16-2

3.18**output power at 1 dB gain compression** $P_{o(1dB)}$

see 8.2.13 of IEC 60747-4

3.19**noise figure** F

see 702-08-57 of IEC 60050-702

3.20**power added efficiency** η_{add}

see 8.2.15 of IEC 60747-4

3.21**adjacent channel power ratio** $P_{\text{o(mod)}}/P_{\text{adj}}$

see 3.10 of IEC 60747-16-4

3.22**load mismatch tolerance** Ψ_{L}

see 7.2.20 of IEC 60747-4

3.23**source mismatch tolerance** Ψ_{S}

see 7.2.21 of IEC 60747-4

3.24**load mismatch ruggedness** Ψ_{R}

see 7.2.22 of IEC 60747-4

ITeH STANDARD PREVIEW
(standards.iteh.ai)

4 Essential ratings and characteristics**4.1 General**[IEC 60747-16-1:2001+AMD1:2007 CSV](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-60747-16-1-2001amd1-2007-csv)[https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-60747-16-1-2001amd1-2007-csv)**4.1.1 Circuit identification and types**<https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-60747-16-1-2001amd1-2007-csv>**4.1.1.1 Designation and types**

The indication of type (device name), the category of the circuit and the technology applied should be given.

Microwave amplifiers are divided into four categories:

Type A: Low-noise type.

Type B: Auto-gain control type.

Type C: Limiting type.

Type D: Power type.

4.1.1.2 General function description

A general description of the function performed by the integrated circuit microwave amplifiers and the features for the application should be made.

4.1.1.3 Manufacturing technology

The manufacturing technology, for example, semiconductor monolithic integrated circuit, thin-film integrated circuit, micro-assembly, should be stated. This statement should include details of the semiconductor technologies such as MESFET, MISFET, Si bipolar transistor, HBT, etc.

4.1.1.4 Package identification

The following statements should be made:

- a) IEC and/or national reference number of the outline drawing, or drawing of non-standard package including terminal numbering;
- b) principal package material; for example, metal, ceramic, plastic.

4.1.1.5 Main application

The main application should be stated, if necessary. If the device has restrictive applications, these should be stated here.

4.2 Application related description

Information on the application of the integrated circuit and its relation to the associated devices should be given.

4.2.1 Conformance to system and/or interface information

It should be stated whether the integrated circuit conforms to an application system and/or interface standard or recommendation.

The detailed information about application systems, equipment and circuits such as VSAT systems, DBS receivers, microwave landing systems, etc., should also be given.

4.2.2 Overall block diagram

A block diagram of the applied systems should be given, if necessary.

[https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv)

4.2.3 Reference data

[22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv](https://standards.iteh.ai/catalog/standards/sist/64bce2c9-542e-4215-a2eb-22b2d8db91c0/iec-60747-16-1-2001amd1-2007-csv)

The most important properties to permit comparison between derivative types should be given.

4.2.4 Electrical compatibility

It should be stated whether the integrated circuit is electrically compatible with other particular integrated circuits or families of integrated circuits or whether special interfaces are required.

Details should be given of the type of the input and output circuits, for example, input/output impedances, d.c. block, open-drain, etc. Interchangeability with other devices, if any, should be given.

4.2.5 Associated devices

If applicable, the following should be stated here:

- devices necessary for correct operation (list with type number, name, and function);
- peripheral devices with direct interfacing (list with type number, name, and function).

4.3 Specification of the function

4.3.1 Detailed block diagram – Functional blocks

A detail block diagram or equivalent circuit information of the integrated circuit microwave amplifiers should be given. The block diagram should be composed of the following:

- 1) functional blocks;
- 2) mutual interconnections among the functional blocks;

- 3) individual functional units within the functional blocks;
- 4) mutual interconnections among the individual functional blocks;
- 5) function of each external connection;
- 6) interdependence between the separate functional blocks.

The block diagram should identify the function of each external connection and, where no ambiguity can arise, can also show the terminal symbols and/or numbers. If the encapsulation has metallic parts, any connection to them from external terminals should be indicated. The connections with any associated external electrical elements should be stated, where necessary.

As additional information, the complete electrical circuit diagram can be reproduced, but not necessarily with indications of the values of the circuit components. The graphical symbol for the function shall be given. This may be obtained from a catalogue of standards of graphical symbols or designed according to the rules of IEC 60617.

4.3.2 Identification and function of terminals

All terminals should be identified on the block diagram (supply terminals, input or output terminals, input/output terminals).

The terminal functions 1)-4) should be indicated in a table as follows:

Terminal number	Terminal symbol	1) Terminal designation	2) Function	Function of terminal	
				3) Input/output identification	4) Type of input/output circuit

1) Terminal name

A terminal name to indicate the function terminal should be given. Supply terminals, ground terminals, blank terminals (with abbreviation NC), non-usable terminals (with abbreviation NU) should be distinguished.

2) Function

A brief indication of the terminal function should be given.

- Each function of multi-role terminals, that is terminals that have multiple functions.
- Each function of the integrated circuit selected by mutual pin connections, programming and/or application of function selection data to the function selection pin, such as mode selection pin.

3) Input/output identification

Input, output, input/output, and multiplex input/output terminals should be distinguished.


4) Type of input/output circuits

The type of the input and output circuits, for example, input/output impedances, with or without d.c. block, etc., should be distinguished.

5) Type of ground

If the baseplate of the package is used as ground, this should be stated.

Example:

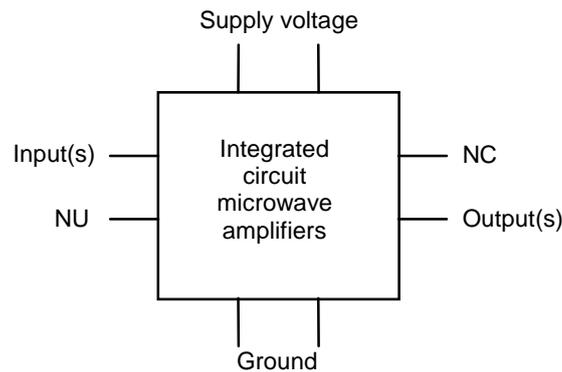

4.3.3 Functional description

The function performed by the circuit should be specified, including the following information:

- basic function;
- relation to external terminals;
- operation mode (for example, set-up method, preference, etc.);
- interrupt handling.

4.3.4 Family-related characteristics

In this part, all the family-specific functional descriptions shall be stated (refer to IEC 60748-2, IEC 60748-3 and IEC 60748-4).

If ratings and characteristics and function characteristics exist for the family, the relevant part of IEC 60748 should be used (for example for microprocessors, see IEC 60748-2, Chapter III, Section 3).

NOTE For each new device family, specific items shall be added in the relevant part of IEC 60748.

4.4 Limiting values (absolute maximum rating system)

The table of these values contains the following.

- a) Any interdependence of limiting conditions shall be specified.
- b) If externally connected and/or attached elements, for example heatsinks, have an influence on the values of the ratings, the ratings shall be prescribed for the integrated circuit with the elements connected and/or attached.
- c) If limiting values are exceeded for transient overload, the permissible excess and their duration shall be specified.
- d) Where minimum and maximum values differ during programming of the device, this should be stated.
- e) All voltages are referenced to a specified reference terminal (V_{SS} , G_{ND} , etc.).
- f) In satisfying the following clauses, if maximum and/or minimum values are quoted, the manufacturer must indicate whether he refers to the absolute magnitude or to the algebraic value of the quantity.
- g) The ratings given must cover the operation of the multi-function integrated circuit over the specified range of operating temperatures. Where such ratings are temperature-dependent, this dependence should be indicated.

4.4.1 Electrical limiting values

Limiting values should be specified as follows.

Parameters	Min.	Max.
(1) Power supply voltages	+	+
(2) Power supply currents (where appropriate)		+
(3) Input voltage(s) (where appropriate)	+	+
(4) Output voltage(s) (where appropriate)	+	+
(5) Input current(s) (where appropriate)		+
(6) Output current(s) (where appropriate)		+
(7) Other terminal voltage(s) (where appropriate)	+	+
(8) Other terminal current(s) (where appropriate)		+
(9) Voltage difference between input and output (where appropriate)	+	+
(10) Power dissipation		+

The detail specification may indicate those values within the table including note 1 and note 2.

Parameters (Note 1, Note 2)	Symbols	Min.	Max.	Unit
iTeh STANDARD PREVIEW (standards.iteh.ai)				
NOTE 1 Where appropriate, in accordance with the type of circuit considered.				
NOTE 2 For power supply voltage range:				
<ul style="list-style-type: none"> - limiting value(s) of the continuous voltage(s) at the supply terminal(s) with respect to a special electrical reference point; - where appropriate, limiting value between specified supply terminals; - when more than one voltage supply is required, a statement should be made as to whether the sequence in which these supplies are applied is significant: if so, the sequence should be stated; - when more than one supply is needed, it may be necessary to state the combinations of ratings for these supply voltages and currents. 				

4.4.2 Temperatures

- 1) Operating temperature
- 2) Storage temperature
- 3) Channel temperature (type C and type D only)
- 4) Lead temperature (for soldering).

The detail specification may indicate those values within the table including the note.

Parameters (Note)	Symbols	Min.	Max.	Unit
NOTE Where appropriate, in accordance with the type of circuit considered.				