

INTERNATIONAL STANDARD

**Industrial communication networks – Fieldbus specifications –
Part 3-3: Data-link layer service definition – Type 3 elements**

(<https://standards.iteh.ai>)
Document Preview

[IEC 61158-3-3:2007](https://standards.iteh.ai/standards/iec/9ed163e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007)

<https://standards.iteh.ai/standards/iec/9ed163e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

WITHDRAWN



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

Industrial communication networks – Fieldbus specifications –
Part 3-3: Data-link layer service definition – Type 3 elements

(<https://standards.iteh.ai>)
Document Preview

<https://standards.iteh.ai/standards/iec/9c163e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

<https://standards.iteh.ai/standards/iec/9c163e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XB**

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
1.1 Overview.....	8
1.2 Specifications.....	8
1.3 Conformance.....	8
2 Normative references.....	9
3 Terms, definitions, symbols, abbreviations and conventions.....	9
3.1 Reference model terms and definitions.....	9
3.2 Service convention terms and definitions.....	10
3.3 Common data-link service terms and definitions.....	11
3.4 Additional Type 3 data-link specific definitions.....	13
3.5 Common symbols and abbreviations.....	15
3.6 Additional Type 3 symbols and abbreviations.....	16
3.7 Common conventions.....	18
3.8 Additional Type 3 conventions.....	19
4 Connectionless-mode data-link service.....	19
4.1 General.....	19
4.2 Model of the connectionless-mode data-link service.....	20
4.3 Sequence of primitives.....	21
4.4 Detailed description of DL services.....	25
5 DL-management Service.....	44
5.1 General.....	44
5.2 Facilities of the DLMS.....	44
5.3 Services of the DL-management.....	44
5.4 Overview of interactions.....	46
5.5 Detailed specification of services and interactions.....	47
Bibliography.....	68
Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses.....	12
Figure 2 – SDA service.....	22
Figure 3 – SDN service.....	23
Figure 4 – SRD service.....	23
Figure 5 – MSRD service.....	24
Figure 6 – CS service.....	24
Figure 7 – Reset, Set value, Get value, Ident (local), DLSAP status, DLSAP activate, DLSAP activate responder, DLSAP activate subscriber and DLSAP deactivate services.....	47
Figure 8 – Event service.....	47
Figure 9 – Ident (remote) service.....	47
Table 1 – Summary of DL services and primitives.....	22
Table 2 – SDA data ack primitives and parameters.....	26
Table 3 – Values of DL_status for the SDA data ack service.....	28
Table 4 – SDN data primitives and parameters.....	29


Table 5 – Values of DL_status for the SDN data service	30
Table 6 – SRD data reply primitives and parameters.....	32
Table 7 – Values of Update_status for the SRD data reply service	33
Table 8 – Additional values of DL_status for the SRD data reply service	34
Table 9 – SRD reply-update primitives and parameters.....	34
Table 10 – Values of DL_status for the SRD reply-update service	35
Table 11 – MSRD MCT data reply primitives and parameters.....	37
Table 12 – MSRD DXM data reply primitive and parameters	39
Table 13 – CS time event primitives and parameters	40
Table 14 – Values of DL_status for the CS time event service	42
Table 15 – CS clock value primitives and parameters	42
Table 16 – Values of CS_status for the CS clock value service.....	43
Table 17 – Values of DL_status for the CS clock value service	44
Table 18 – Summary of DL-management services and primitives.....	46
Table 19 – Reset primitives and parameters	47
Table 20 – Values of DLM_status for the reset service.....	48
Table 21 – Set value primitives and parameters.....	48
Table 22 – Mandatory DLE-variables	49
Table 23 – Optional DLE-variables	49
Table 24 – Permissible values of mandatory DLE-variables	50
Table 25 – Permissible values of optional DLE-variables.....	50
Table 26 – Meaning of the values for the parameter isochronous_mode.....	51
Table 27 – Default reaction times and operating parameters for a master station for asynchronous transmission.....	51
Table 28 – Default reaction times and operating parameters for a slave station with asynchronous transmission.....	51
Table 29 – Default reaction times and operating parameters for master stations for coupling of synchronous and asynchronous transmission segments	52
Table 30 – Default reaction times and operating parameter for slave stations for coupling of synchronous and asynchronous transmission segments	52
Table 31 – Values of DLM_status for the set value service	52
Table 32 – Get value primitives and parameters	53
Table 33 – Additional mandatory DLE-variables in master stations.....	53
Table 34 – Permissible values of the additional DLE-variables in master stations.....	54
Table 35 – Values of DLM_status for the get value service	54
Table 36 – Event primitive and parameters.....	55
Table 37 – Mandatory DLL events and fault types	55
Table 38 – Permissible values of T _{SH}	55
Table 39 – Ident primitives and parameters	56
Table 40 – Ident_list for the ident service	57
Table 41 – Values of DLM_status for the ident service (local)	57
Table 42 – Values of DLM_status for the ident service (remote).....	57
Table 43 – DLSAP status primitives and parameters.....	58
Table 44 – Values of DLM_status for the DLSAP status service	59

Table 45 – DLSAP activate primitives and parameters	59
Table 46 – DLSAP activate service_list.....	60
Table 47 – DLSAP activate DLSDU_length_list (SDA, SDN, SRD, MSRD and CS)	61
Table 48 – DLSDU lengths of SDA and SDN as used in the DLSAP activate service	61
Table 49 – DLSDU lengths of SRD and MSRD as used in the (master station) DLSAP activate service	61
Table 50 – DLSDU lengths of CS as used in the DLSAP activate service	62
Table 51 – Values of DLM_status for the DLSAP activate service	62
Table 52 – DLSAP activate responder primitives and parameters.....	62
Table 53 – DLSDU_length_list for the DLSAP activate responder service.....	63
Table 54 – DLSDU length of SRD and MSRD as used in the DLSAP activate responder service	63
Table 55 – Values of DLM_status for the DLSAP activate responder service.....	64
Table 56 – DLSAP activate subscriber primitives and parameters.....	65
Table 57 – DLSDU_length_list for the DLSAP activate subscriber service.....	65
Table 58 – DLSDU lengths of MSRD as used in the DLSAP activate subscriber service (master and slave stations).....	65
Table 59 – Values of DLM_status for the DLSAP activate subscriber service	66
Table 60 – DLSAP deactivate primitives and parameters	66
Table 61 – Values of DLM_status for the DLSAP deactivate service.....	67

(<https://standards.iteh.ai>)
Document Preview

IEC 61158-3-3:2007

<https://standards.iteh.ai/en/standards/iec/9c163e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

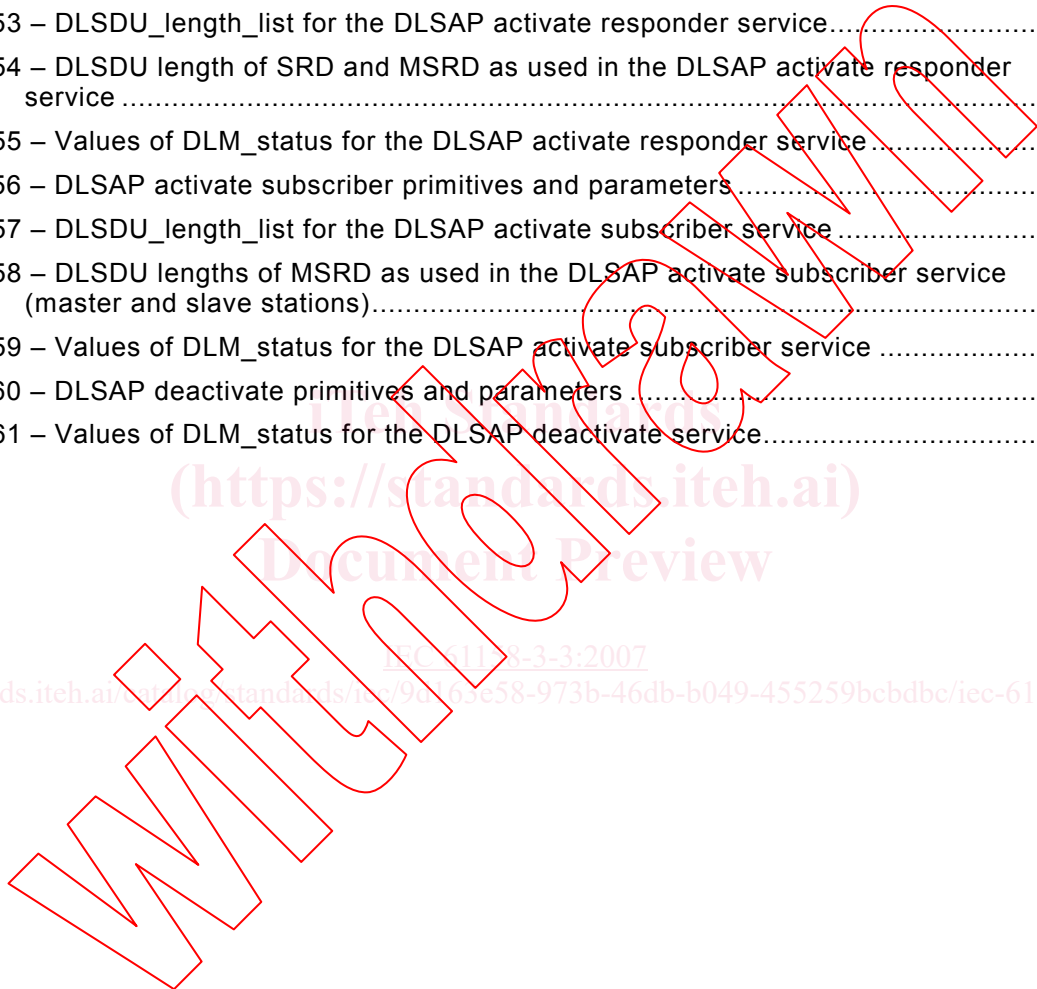

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
FIELDBUS SPECIFICATIONS –****Part 3-3: Data-link layer service definition – Type 3 elements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

NOTE Use of some of the associated protocol types is restricted by their intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a particular data-link layer protocol type to be used with physical layer and application layer protocols in type combinations as specified explicitly in the IEC 61784 series. Use of the various protocol types in other combinations may require permission of their respective intellectual-property-right holders.

International Standard IEC 61158-3-3 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This first edition and its companion parts of the IEC 61158-3 subseries cancel and replace IEC 61158-3:2003. This edition of this part constitutes an editorial revision.

This edition includes the following significant changes with respect to the previous edition:

- a) deletion of the former Type 6 fieldbus, and the placeholder for a Type 5 fieldbus data-link layer, for lack of market relevance;
- b) addition of new types of fieldbuses;
- c) division of this part into multiple parts numbered 3-1, 3-2, ..., 3-19.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/473/FDIS	65C/484/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under <http://webstore.iec.ch> in the data related to the specific publication. At this date, the publication will be:

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

NOTE The revision of this standard will be synchronized with the other parts of the IEC 61158 series.

The list of all the parts of the IEC 61158 series, under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

Withdrawing

iTech Standards
(<https://standards.itih.ai>)
Document Preview

IEC 61158-3-3:2007
<https://standards.itih.ai/catalog/standards/iec/98d69e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC/TR 61158-1.

Throughout the set of fieldbus standards, the term “service” refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this standard is a conceptual architectural service, independent of administrative and implementation divisions.

Withdrawing

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

<https://standards.iteh.ai/catalog/standards/iec/96d69e58-973b-46db-b049-455259bcbdbc/iec-61158-3-3-2007>

INDUSTRIAL COMMUNICATION NETWORKS – FIELD BUS SPECIFICATIONS –

Part 3-3: Data-link layer service definition – Type 3 elements

1 Scope

1.1 Overview

This part of IEC 61158 provides common elements for basic time-critical messaging communications between devices in an automation environment. The term “time-critical” is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible service provided by the Type 3 fieldbus data-link layer in terms of

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form which they take; and
- c) the interrelationship between these actions and events, and their valid sequences.

The purpose of this standard is to define the services provided to

- the Type 3 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model, and
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

1.2 Specifications

The principal objective of this standard is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications, and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously existing industrial communications protocols.

This specification may be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including

- a) the sizes and octet ordering of various multi-octet service parameters, and
- b) the correlation of paired request and confirm, or indication and response, primitives.

1.3 Conformance

This standard does not specify individual implementations or products, nor do they constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 1 data-link layer services defined in this standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model — Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 10731, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

3.1 Reference model terms and definitions

This standard is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein.

3.1.1 DL-address	[7498-3]
3.1.2 DL-address-mapping	[7498-1]
3.1.3 called-DL-address	[7498-3]
3.1.4 calling-DL-address	[7498-3]
3.1.5 centralized multi-end-point-connection	[7498-1]
3.1.6 DL-connection	[7498-1]
3.1.7 DL-connection-end-point	[7498-1]
3.1.8 DL-connection-end-point-identifier	[7498-1]
3.1.9 DL-connection-mode transmission	[7498-1]
3.1.10 DL-connectionless-mode transmission	[7498-1]
3.1.11 correspondent (N)-entities	[7498-1]
correspondent DL-entities (N=2)	
correspondent Ph-entities (N=1)	
3.1.12 DL-duplex-transmission	[7498-1]
3.1.13 (N)-entity	[7498-1]
DL-entity (N=2)	
Ph-entity (N=1)	
3.1.14 DL-facility	[7498-1]
3.1.15 flow control	[7498-1]

3.1.16 (N)-layer	[7498-1]
DL-layer (N=2)	
Ph-layer (N=1)	
3.1.17 layer-management	[7498-1]
3.1.18 DL-local-view	[7498-3]
3.1.19 DL-name	[7498-3]
3.1.20 naming-(addressing)-domain	[7498-3]
3.1.21 peer-entities	[7498-1]
3.1.22 primitive name	[7498-3]
3.1.23 DL-protocol	[7498-1]
3.1.24 DL-protocol-connection-identifier	[7498-1]
3.1.25 DL-protocol-data-unit	[7498-1]
3.1.26 DL-relay	[7498-1]
3.1.27 reset	[7498-1]
3.1.28 responding-DL-address	[7498-3]
3.1.29 routing	[7498-1]
3.1.30 segmenting	[7498-1]
3.1.31 (N)-service	[7498-1]
DL-service (N=2)	
Ph-service (N=1)	
3.1.32 (N)-service-access-point	[7498-1]
DL-service-access-point (N=2)	
Ph-service-access-point (N=1)	
3.1.33 DL-service-access-point-address	[7498-3]
3.1.34 DL-service-connection-identifier	[7498-1]
3.1.35 DL-service-data-unit	[7498-1]
3.1.36 DL-simplex-transmission	[7498-1]
3.1.37 DL-subsystem	[7498-1]
3.1.38 systems-management	[7498-1]
3.1.39 DLS-user-data	[7498-1]

3.2 Service convention terms and definitions

This standard also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

3.2.1 acceptor

3.2.2 asymmetrical service

**3.2.3 confirm (primitive);
requestor.deliver (primitive)**

3.2.4 deliver (primitive)

3.2.5 DL-confirmed-facility

3.2.6 DL-facility

3.2.7 DL-local-view

3.2.8 DL-mandatory-facility

3.2.9 DL-non-confirmed-facility

3.2.10 DL-provider-initiated-facility

3.2.11 DL-provider-optional-facility

**3.2.12 DL-service-primitive;
primitive**

3.2.13 DL-service-provider

3.2.14 DL-service-user

3.2.15 DLS-user-optional-facility

**3.2.16 indication (primitive);
acceptor.deliver (primitive)**

3.2.17 multi-peer

**3.2.18 request (primitive);
requestor.submit (primitive)**

3.2.19 requestor

**3.2.20 response (primitive);
acceptor.submit (primitive)**

3.2.21 submit (primitive)

3.2.22 symmetrical service

3.3 Common data-link service terms and definitions

NOTE Many definitions are common to more than one protocol Type; they are not necessarily used by all protocol Types.

3.3.1

DL-segment, link, local link


single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

3.3.2

DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

NOTE This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses.

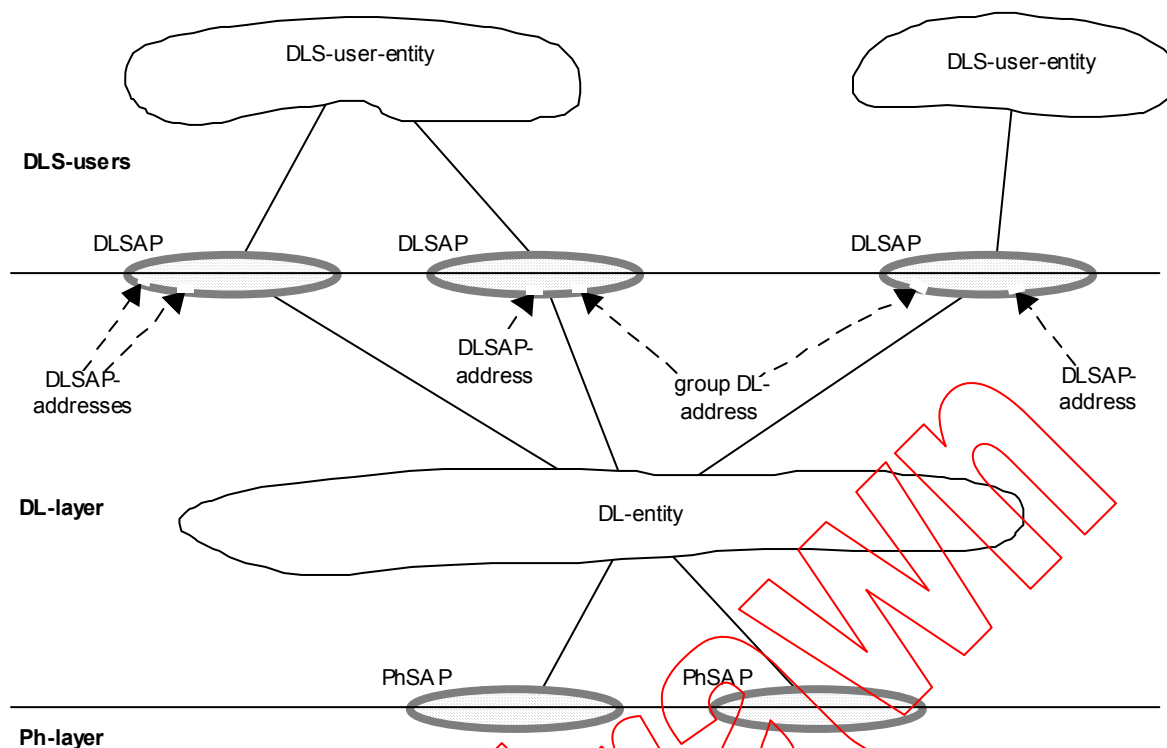

- NOTE 1 DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.
- NOTE 2 DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.
- NOTE 3 A single DL-entity may have multiple DLSAP-addresses and group DL-addresses associated with a single DLSAP.

Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses

3.3.3

DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS-user, or a group DL-address potentially designating multiple DLSAPs, each of a single DLS-user

NOTE This terminology is chosen because ISO/IEC 7498-3 does not permit the use of the term DLSAP-address to designate more than a single DLSAP at a single DLS-user.

3.3.4

(individual) DLSAP-address

DL-address that designates only one DLSAP within the extended link

NOTE A single DL-entity may have multiple DLSAP-addresses associated with a single DLSAP.

3.3.5

extended link

DL-subnetwork, consisting of the maximal set of links interconnected by DL-relays, sharing a single DL-name (DL-address) space, in which any of the connected DL-entities may communicate, one with another, either directly or with the assistance of one or more of those intervening DL-relay entities

NOTE An extended link may be composed of just a single link.

3.3.6

frame

denigrated synonym for DLPDU