



Standard Guide for Conducting Corrosion Coupon Tests in Field Applications¹

This standard is issued under the fixed designation G 4; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This guide covers procedures for conducting corrosion coupon tests in plant equipment under operating conditions to evaluate the corrosive attack upon engineering materials. It does not cover electrochemical methods for determining corrosion rates.

1.1.1 While intended primarily for immersion tests, general guidelines provided can be applicable for exposure of test coupons in plant atmospheres, provided that placement and orientation of the coupons is non-restrictive to air circulation.

1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* See also 10.4.2.

2. Referenced Documents

2.1 ASTM Standards:

- A 262 Practices for Detecting Susceptibility to Intergranular Attack in Austenitic Stainless Steels²
- E 3 Practice for Preparation of Metallographic Specimens³
- G 1 Practice for Preparing, Cleaning, and Evaluating Corrosion Test Specimens⁴
- G 15 Terminology Relating to Corrosion and Corrosion Testing⁴
- G 16 Guide for Applying Statistics to Analysis of Corrosion Data⁴
- G 30 Practice for Making and Using U-Bend Stress Corrosion Test Specimens⁴
- G 36 Practice for Performing Stress-Corrosion Cracking Tests in a Boiling Magnesium Chloride Solution⁴
- G 37 Practice for Use of Mattsson's Solution of pH 7.2 to Evaluate the Stress Corrosion Cracking Susceptibility of Copper-Zinc Alloys⁴

¹ This guide is under the jurisdiction of ASTM Committee G-1 on Corrosion of Metals and is the direct responsibility of Subcommittee G01.12 on In-Plant Corrosion Tests.

Current edition approved Jan. 15, 1995. Published March 1995. Originally issued as A224-39. Last previous edition G4-84.

² *Annual Book of ASTM Standards*, Vol 01.03.

³ *Annual Book of ASTM Standards*, Vol 03.01.

⁴ *Annual Book of ASTM Standards*, Vol 03.02.

- G 41 Practice for Determining Cracking Susceptibility of Metals Exposed Under Stress to a Hot Salt Environment⁴
- G 44 Practice for Evaluating Stress Corrosion Cracking Resistance of Metals and Alloys by Alternate Immersion in 3.5 % Sodium Chloride Solution⁴
- G 46 Practice for Examination and Evaluation of Pitting Corrosion⁴
- G 47 Test Method for Determining Susceptibility to Stress-Corrosion Cracking of High Strength Aluminum Alloy Products⁴
- G 58 Practice for Preparation of Stress-Corrosion Test Specimens for Weldments⁴
- G 78 Guide for Crevice Corrosion Testing of Iron-Base and Nickel-Base Stainless Alloys in Seawater and Other Chloride-Containing Aqueous Environments⁴

3. Significance and Use

3.1 Observations and data derived from coupon testing are used to determine the average rate of corrosion and the type of attack (see Terminology G 15) that occur during the exposure interval. The data may be used as part of an evaluation of potential materials of construction for use in similar service or for replacement materials in existing facilities.

3.2 The data developed from this guide may also be used as guide lines to the behavior of existing plant materials for the purpose of scheduling maintenance and repairs.

3.3 Corrosion rate data derived from a single exposure generally do not provide information on corrosion rate change versus time. Corrosion rates may increase, decrease, or remain constant, depending on the nature of the corrosion products and the effects of incubation time required at the onset of pitting or crevice corrosion.

4. Limitations

4.1 Metal specimens immersed in a specific liquid may not corrode at the same rate or in the same manner as in equipment in which the metal acts as a heat transfer medium in heating or cooling the liquid. In certain services, the corrosion of heat-exchanger tubes may be quite different from that of the shell or heads. This phenomenon also occurs on specimens exposed in gas streams from which water or other corrodents condense on cool surfaces. Such factors must be considered in both design and interpretation of plant tests.

4.2 Effects caused by high velocity, abrasive ingredients,

etc. (which may be emphasized in pipe elbows, pumps, etc.) may not be easily reproduced in coupon tests.

4.3 The behavior of certain metals and alloys may be profoundly influenced by the presence of dissolved oxygen. It is essential that the test coupons be placed in locations representative of the degree of aeration normally encountered in the process.

4.4 Corrosion products from the test specimens may have undesirable effects on the process stream and should be evaluated before the test.

4.5 Corrosion products from the plant equipment may influence the corrosion of one or more of the test metals. For example, when aluminum specimens are exposed in copper-containing systems, corroding copper will exert an adverse effect on the corrosion of the aluminum. On the contrary, stainless steel specimens may have their corrosion resistance enhanced by the presence of the oxidizing cupric ions.

4.6 The accumulation of corrosion products can sometimes have harmful effects. For example, copper corroding in intermediate strengths of sulfuric acid will have its corrosion rate increased as the cupric ion concentration in the acid increases.

4.7 Coupon corrosion testing is predominantly designed to investigate general corrosion; however, other forms of corrosion may be evaluated with coupons.

4.7.1 Galvanic corrosion may be investigated by special devices that couple one coupon to another in electrical contact. It should be observed, however, that galvanic corrosion can be greatly affected by the area ratios of the respective metals.

4.7.2 Crevice or concentration cell corrosion may occur when the metal surface is partially blocked from the bulk liquid, as under a spacer. An accumulation of bulky corrosion products between coupons can promote localized corrosion of some alloys or affect the general corrosion rates of others. Such accumulation should be reported.

4.7.3 Selective corrosion at the grain boundaries (for example, intergranular corrosion of sensitized austenitic stainless steels) will not be readily observable in mass loss measurements and often requires microscopic examination of the coupons after exposure.

4.7.4 Parting or dealloying is a condition in which one constituent is selectively removed from an alloy, as in the dezincification of brass or the graphitic corrosion of cast iron. Close attention and a more sophisticated evaluation than a simple mass loss measurement are required to detect this phenomenon.

4.7.5 Pitting corrosion cannot be evaluated by mass loss. It is possible to miss the phenomenon altogether when using small test specimens since the occurrence of pitting is often a statistical phenomenon and its incidence can be directly related to the area of metal exposed.

4.7.6 Stress-corrosion cracking (SCC) may occur under conditions of tensile stress and it may or may not be visible to the naked eye or on casual inspection. A metallographic examination (Practice E 3) will confirm this mechanism of attack. SCC usually occurs with no significant loss in mass of the test coupon, except in some refractory metals.

4.7.7 A number of reactive metals, most notably titanium and zirconium, develop strongly adherent corrosion product

films in corrosive environments. In many cases, there is no acceptable method to remove the film without removing significant uncorroded metal. In these cases, the extent of corrosion can best be measured as a mass gain rather than mass loss.

5. Test Coupon Design

5.1 Before the size, shape, and finish of test coupons are specified, the objectives of the test program should be determined, taking into consideration any restrictions that might dictate fabrication requirements. The duration, cost, confidence level, and expected results affect the choice of the shape, finish, and cost of the coupons.

5.1.1 Test coupons are generally fabricated into disks or rectangular shapes. Other shapes such as balls, cylinders, and tubes are used, but to a much lesser extent.

5.1.2 Disks are normally made by one of three methods: (1) by punching from sheet material, (2) by slicing from a bar, or (3) by trepanning by a lathe or mill. Punched disks are by far the least expensive and should be considered if material thickness is not a limitation. Some of the positive characteristics of disks are: (1) the surface area can be minimized where there is restricted space, such as in pipeline applications, (2) disks can be made inexpensively if a polished or machined surface finish is not required, and (3) edge effects are minimized for a given total surface area. Some negative characteristics are: (1) disks are very costly to fabricate if a ground finish and machined edges are required, (2) disks fabricated from sheet material result in a considerable amount of scrap material, and (3) disks sliced from a bar present a surface orientation that can result in extensive end-grain attack. Using a bar is undesirable unless end-grain effects are to be evaluated.

5.2 Rectangular coupons are fabricated by either punching, shearing, or saw cutting. Punched coupons are the most economical if the quantity is sufficiently high to justify the initial die cost. Fabrication is more cost-effective for rectangular coupons than for disks when ground finished and machined sides are required, and they can be made using very few shop tools. In some cases, rectangular coupons are more awkward to mount.

5.3 Material availability and machinability also affect the cost of producing all types of coupons. Before the shape and size are specified, the corrosion engineer should determine the characteristics of the proposed materials.

6. Test Specimens

6.1 The size and shape of test specimens are influenced by several factors and cannot be rigidly defined. Sufficient thickness should be employed to minimize the possibility of perforation of the specimen during the test exposure. The size of the specimen should be as large as can be conveniently handled, the limitation being imposed by the capacity of the available analytical balance and by the problem of effecting entry into operating equipment.

6.2 A convenient size for a standard corrosion coupon is 38 mm (1.5 in.) in diameter and 3 mm (0.125 in.) in thickness with an 11 mm (0.438 in.) hole in the center of the round coupon. This size was arrived at as being the maximum size that could easily effect entry through a normal 38 mm nozzle. However,

it is also convenient for larger size nozzle entries as well as for laboratory corrosion testing. A convenient standard coupon for spool-type racks measures 25 by 50 by 3 mm (1 by 2 by 0.125 in.) or 50 by 50 by 3 mm (2 by 2 by 0.125 in.). A round coupon of 53 by 3 mm (2 by 0.125 in.) or 55 by 1.5 mm (2 by 0.062 in.) is sometimes employed. These last three measure about 0.005 dm² in surface area.

6.3 Other sizes, shapes, and thicknesses of specimens can be used for special purposes or to comply with the design of a special type of corrosion rack. Special coupons should be reduced to a few in number in preliminary tests; special coupons should be employed to consider the effect of such factors of equipment construction and assembly as heat treatment, welding, soldering, and cold-working or other mechanical stressing.

6.4 Since welding is a principal method of fabricating equipment, welded coupons should be included as much as possible in the test programs.

6.4.1 Aside from the effects of residual stresses, the main items of interest in a welded coupon are the corrosion resistance of the weld bead and the heat affected zone. Galvanic effects between weld metal and base metal can also be evaluated. The weld and heat affected zone regions are relatively small; therefore, welded coupons should be made slightly larger than the normal size coupon when possible, for example, 50 mm by 75 mm (2 in. by 3 in.). The optimum method of welding coupons is to join the two halves using a single vee or double vee groove with full penetration and multiple passes. Double vee joint preparation is used for very thick samples. Machining the weld flush is optional, depending on how closely the sample will be examined afterward (see practice G58).

6.4.2 The welding process and number of passes influence the heat input and, consequently, the width and location of the heat affected zone. For example, gas tungsten arc welding has lower heat input than oxygen fuel welding and causes a narrower heat affected zone, which is also closer to the weld bead.

7. Preparation of Test Specimens

7.1 Controversy exists as to whether the test coupon edges should be machined. The cold-worked area caused by shearing or punching coupons can provide valuable information on alloy susceptibility to stress corrosion cracking. Also, the ability to compare information among coupons of different materials can be affected by the amount of cold work performed on the material. Therefore, the decision to machine test coupons and to test coupons with/without the residual stresses associated with cold work should be made on a case-to-case basis.

7.1.1 The depth of cold work associated with punching and shearing operations typically extends back from the cut edge to a distance equal to the coupon thickness. Removal of the cold worked areas can be performed by grinding or careful machining the coupon edges.

7.1.2 Ideally, the surface finish of the test coupon should be identical with the surface finish of the material to be used for equipment fabrication. However, this is often difficult because the finish on materials varies between mills, between sheet and plate and even between heat treatments. The mill scale and the

amount of oxides on the surface can vary as well. Also, surface finishes are difficult to apply to edges that have been distorted by punching or shearing. Since the primary requirement is usually to determine the corrosion resistance of the material itself, a clean metal surface is most often used. The purpose of the test dictates the required finish of the coupon. For instance, for water treating applications, relative changes of weights of coupons are usually compared to optimize inhibitor additions. The coupon are generally punched or sheared and finished by blasts with glass beads. This is one of the most economical ways of preparing coupons. Manufacturing variables in coupon preparation that can be removed reasonably should be eliminated. A standard surface finish facilitates the comparison of results among test samples.

7.2 Some of the available finishes are:

7.2.1 Mill finish (pickled, bright annealed, or shot blasted),

7.2.2 Electrolytic polished, (Note that electrolytic polishing can produce a surface layer enriched in some alloying elements while depleted in others. For example, chromium is enriched on stainless surfaces and sulfur is depleted.)

7.2.3 Blasted with sand or steel shot, (Note that blasting many metals with sand can cause embedded sand particles and steel shot can cause surface contamination with iron or iron oxide. Glass beads are better, but not if broken pieces are allowed to be used in the blasting.)

7.2.4 Sanded with abrasive cloth or paper,

7.2.5 Machine finished, and

7.2.6 Passivation with nitric acid to remove surface iron contamination and other chemical cleaning methods used, for example, after welding.

7.3 The surface finish most widely used is produced by sanding with an abrasive cloth or paper. Sanding removes the mill scale and oxides as well as other defects in the material such as scratches, pits, etc., that can produce misleading results when the data are being analyzed.

7.3.1 A 120 grit finish is generally acceptable and is readily produced without the need for specialized equipment. Other surface finishes may be obtained through the appropriate use of abrasive papers and cloth. In order to prevent metallurgical changes that could affect the corrosion resistance, the test sample should be cooled during fabrication. Wet sanding is one method of preventing specimens from heating up. In many cases, it is necessary to begin sanding with coarse abrasives and progressively move to finer abrasives.

7.3.2 Clean polishing belts should be used to avoid contamination of the metal surface, particularly when widely dissimilar metals are being finished. For example, a belt used to sand brass should not be used to sand aluminum. Particles of one metal could become imbedded in the other, resulting in erroneous data.

7.4 Test specimens should be cleaned and the initial mass determined (see Practice G 1).

7.5 A pre-exposure inspection of test specimens should be conducted in order to identify any pits, mechanical scratches, or residual surface treatment artifacts that could influence the corrosion behavior of the specimen.

8. Number of Test Specimens

8.1 In general, at least duplicate specimens should be tested.

If possible, in cases in which confidence limits are required for corrosion rate measurement, then somewhere between 5 and 10 replicates should be run, depending on the scope of the program. The confidence level can be established by the procedures shown in Guide G 16. The duplicate samples should be widely separated on the test rack rather than adjacent to one another. The results for the samples should also be reported separately.

9. Identification of Test Specimens

9.1 Although it may be necessary in special instances to notch the edge of the specimens for identification, it is preferable that they be stamped with a code number. The stamped number has an additional advantage in that, should a specimen show a preferential attack at the stamped area, a warning is given that the material is susceptible to corrosion when cold worked. It is also possible in some instances to detect stress-corrosion cracking emanating from the stamped areas. Note, however, that although the presence of such localized attacks is a positive indication, absence of attack is not a guarantee of immunity from attack in operating equipment.

10. Test Rack Design and Test Location

10.1 The purpose of the rack is to support test coupons in the process environment at the proper location and orientation. To accomplish this, the corrosion engineer should first determine the number, size, and spacing of the coupons to be tested and then establish the proper location and orientation of the rack. With this accomplished, the type of rack can be selected.

10.1.1 Coupons are usually electrically isolated from one another and the rack unless special effects, such as galvanic corrosion, are under study. Insulation is achieved by sleeving all metal parts in contact with the coupons and separating the coupons with washers. The sleeves and washers should be made from a nonconductive material such as polytetrafluoroethylene (PTFE) fluorocarbon or ceramic material.

10.2 The rack should be as simple as possible, but it also should be sturdy and constructed of materials resistant to the test environment. Bolts should be spot welded or double nuts used to prevent loosening during exposure. Occasionally an insulated bolt is all that is necessary to suspend the test specimens. Handling this assembly requires a few more precautions than some other mounting systems but is cost effective in many instances. Another method is to suspend the test coupons by an insulated wire. This system can be used in a storage tank or other nonagitated vessels; for example, as used in chemical cleaning operations.

10.2.1 A flat bar rack is usually made of rigid material, such as 6 mm (.0250 in.) thick plate, and is approximately 25 mm (1 in.) wide by 305 mm (12 in.) long. With a few mounting holes at one end, a flat bar rack is capable of supporting several specimens. The other end is attached in the process location either by welding, bolting, or clamping. See Fig. 1.

10.2.2 A spool rack, with adjustable end plates, can be used to mount up to 36 coupons. Typical racks are approximately 305 mm (12 in.) long with 15 mm (0.625 in.) spacing between coupons. With the support bars on the sides, the rack can be handled without touching the coupons. The rack can be easily mounted by strips that are attached to the top and bottom. These strips can be welded, bolted, or clamped in place. See Fig. 2.

10.2.3 A pipeline rack is designed to fit between the flanges in a pipeline. It can also be used at a nozzle. Because of the cantilever support and pipe diameter, the number of coupons that can be mounted on this system is restricted. Design modification can be made in order to increase the number of coupons. A potential problem with the pipeline rack is the flow restriction in the pipeline. See Fig. 3.

10.3 One of the most common reasons for the failure of test racks is selecting fasteners that do not resist the environment. Since the bolting hardware is usually highly stressed and contains crevices, corrosive attack on fasteners can occur rapidly. Another common reason for failure is defective welding of the test rack components or of the test rack to the vessel. Full-penetration welds should be used, and the area to be welded should be thoroughly cleaned. Fatigue failures caused by equipment vibration or high flow rates is another leading cause of rack failures. With proper design, a rack can be built that will eliminate these failures.

10.3.1 Problems caused by failure of a mounting system also should be considered in designing the test rack. In many cases, such as with agitated vessels, pumps, etc., a loose test rack could do extensive damage. (Test racks should be inserted after the pumps to prevent damage to the impeller in case of rack failure.)

10.4 Retractable coupon holders overcome the greatest limitation of most forms of coupon testing, which is the need to shut down in order to remove the test rack from the process. The arrangement consists of a 50 mm (2 in.) or larger nozzle that is fitted with a fully opening gate or plug valve. The rod-shaped coupon holder is contained in a retraction chamber, which is flanged to the valve, and is fitted additionally with a drain valve (see Fig. 3). The other end of the retraction chamber contains a packing gland through which the coupon

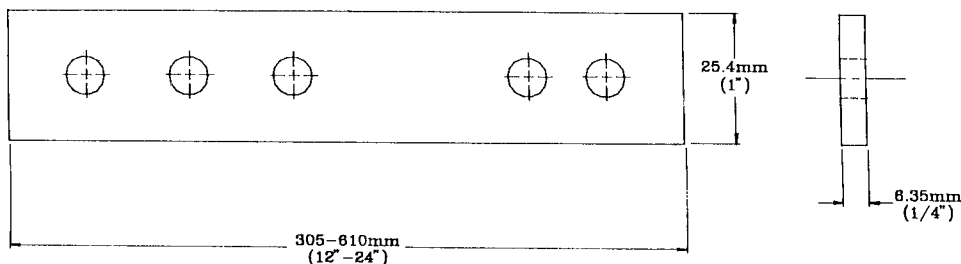


FIG. 1 Flat Bar Rack