

INTERNATIONAL  
STANDARD

**ISO**  
**8668-3**

First edition  
1994-12-01

---

---

**Aircraft — Terminal junction systems —**

**Part 3:**

Detail specification for type 1 system

iTeh STANDARD PREVIEW

(standards.iteh.ai)

*Aéronefs — Systèmes de raccordement à modules amovibles —*

*Partie 3: Spécification détaillée pour le système du type 1*

<https://standards.iteh.ai/catalog/standards/sist/455c5f7c-adfc-4f03-899f-04e2f8f5520d/iso-8668-3-1994>

INTERNATIONAL

ISO



Reference number  
ISO 8668-3:1994(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8668-3 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 1, *Aerospace electrical requirements*.

ISO 8668 consists of the following parts, under the general title *Aircraft — Terminal junction systems*:

- Part 1: *Characteristics*
- Part 2: *Tests*
- Part 3: *Detail specification for type 1 system*
- Part 4: *Detail specification for type 2 system*
- Part 5: *Detail specification for type 3 system*
- Part 6: *Detail specification for type 4 system*

© ISO 1994

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

# Aircraft — Terminal junction systems —

## Part 3:

### Detail specification for type 1 system

#### 1 Scope

**1.1** This part of ISO 8668 specifies the particular characteristics of a terminal junction system (TJS), designated as type 1 and intended for use at temperatures between  $-55\text{ °C}$  and  $+155\text{ °C}$ .

**1.2** The junction systems covered by this part of ISO 8668 comprise:

- a) feedback modules in four sizes;
- b) feedthrough modules in four sizes;
- c) frames adapted to these modules: standard frame P1, perforated frame P2 or frame P3 for feedback modules; solid frame P4 for feedthrough modules;
- d) module clamps and inserts;
- e) removable identification tags;
- f) removable male crimp contacts of sizes 22, 20, 16 and 12;
- g) sealing plugs.

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 8668. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 8668 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 8668-1:1986, *Aircraft — Terminal junction systems — Part 1: Characteristics*.

ISO 8668-2:1986, *Aircraft — Terminal junction systems — Part 2: Tests*.

MIL-I-81969:1982, *Connector and electrical contact — General specification for installing and removal tools*.

#### 3 Definitions

For the purposes of this part of ISO 8668, the definitions given in ISO 8668-1 apply. See also IEC 50(581):1978, *International Electrotechnical Vocabulary — Chapter 581: Electromechanical components for electronic equipment*.

## 4 Designation

### 4.1 Modules

The modules shall be designated as follows:

- a) reference to this part of ISO 8668;
- b) separated by a space, a figure indicating the type of module:
  - 1 = feedback module,
  - 2 = feedthrough module;
- c) a letter indicating the size of module: A, B, C or D (see figures 1 and 2);
- d) three figures indicating the interconnection diagram (see 5.2);
- e) a letter defining resistance to fluids (see table 1).

**Table 1 — Code for resistance to fluids**

Fluids	Code
Synthetic oil for turbine aero engines Mineral oil for turbine aero engines Kerosene for turbine aero engines	A

#### EXAMPLE

The designation of a size A feedback module with 21 contacts of size 22, arranged according to interconnection diagram 101 and resistant to fluids defined by code A is as follows:

**Feedback module ISO 8668-3 1 A 101 A**

[ISO 8668-3:1994](https://standards.iteh.ai/catalog/standards/sist/455c5f7c-adfc-4f03-899f-04e2f8f5520d/iso-8668-3-1994)

<https://standards.iteh.ai/catalog/standards/sist/455c5f7c-adfc-4f03-899f-04e2f8f5520d/iso-8668-3-1994>

### 4.2 Frames

The frames shall be designated as follows:

- a) reference to this part of ISO 8668;
- b) separated by a space, a figure indicating the type of module for which the frame is designated:
  - 1 = feedback modules,
  - 2 = feedthrough modules;
- c) a letter indicating the type of frame:
  - P1 = standard solid frame for feedback modules;
  - P2 = perforated frame for feedback modules;
  - P3 = reinforced frame for feedback modules;
  - P4 = full frame for feedthrough modules.
- d) three-figure code indicating the length of the frame, in millimetres;
- e) separated by a hyphen, a figure indicating the nature of the protection of the frame (see table 2).

**Table 2 — Coding of the protection of frames**

Protection	Code
White cadmium plating	1
Colourless anodic oxidation	2
Black anodic oxidation	3
Yellow anodic oxidation	4
Stainless steel	5

## EXAMPLE

The designation of a perforated frame for 100 mm long feedback modules, protected by black anodic oxidation, is as follows:

**Perforated frame ISO 8668-3 1 P2 100 - 3**

### 4.3 Module clamps and inserts

Module clamps and inserts shall be designated as follows:

- a) reference to this part of ISO 8668;
- b) separated by a space, two letters and one figure indicating the type of module clamp or insert:
  - SR1 and SR2 for feedback modules;
  - ST1 and ST2 for feedthrough modules.

## EXAMPLE

The designation of a module clamp for a feedback module is as follows:

**Module clamp ISO 8668-3 SR1**

### 4.4 Contacts

The contacts shall be designated as follows:

- a) reference to this part of ISO 8668;
- b) separated by a space, the two-figure code 22, 20, 16 or 12 indicating the size of contact.

## EXAMPLE

The designation of a contact of size 22 is as follows:

**Contact ISO 8668-3 22**

### 4.5 Sealing plugs

Sealing plugs shall be designated as follows:

- a) reference to this part of ISO 8668;
- b) separated by a space, a two-figure code: 01, 02, 03 or 04 (see table 9).

## EXAMPLE

The designation of a sealing plug for size 22 contact cavities is as follows:

**Sealing plug ISO 8668-3 01**

## 5 Characteristics

### 5.1 Dimensional characteristics

The dimensions are given in millimetres. In the figures and in certain tables, values in inches are given in parentheses. Drawings are shown in the first angle.

5.1.1 Feedback modules (code 1)

See figure 1 and table 3.

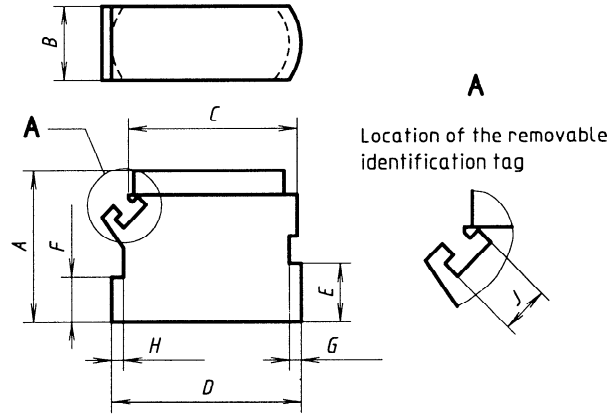


Figure 1 — Feedback module

Table 3 — Feedback modules

Dimensions in millimetres									
Size of module	A max.	B ± 0,1	C $\begin{matrix} 0 \\ -0,3 \end{matrix}$	D $\begin{matrix} +0,1 \\ -0,2 \end{matrix}$	E $\begin{matrix} 0 \\ -0,2 \end{matrix}$	F $\begin{matrix} 0 \\ -0,2 \end{matrix}$	G	H	J $\begin{matrix} +0,2 \\ 0 \end{matrix}$
A	21,6	10	21,8	24,8	8	6	1,5	1,5	3
B	20	10	21,8	24,8	8	6	1,5	1,5	3
C	25	12	23	24,8	8	6	1,5	1,5	3
D	25	15	24	24,8	8	6	1,5	1,5	3
Dimensions in inches									
Size of module	A max.	B ± 0,004	C $\begin{matrix} 0 \\ -0,011 \end{matrix}$	D $\begin{matrix} +0,004 \\ -0,008 \end{matrix}$	E $\begin{matrix} 0 \\ -0,008 \end{matrix}$	F $\begin{matrix} 0 \\ -0,008 \end{matrix}$	G	H	J $\begin{matrix} +0,008 \\ 0 \end{matrix}$
A	0,85	0,393	0,858	0,976	0,314	0,236	0,059	0,059	0,118
B	0,787	0,393	0,858	0,976	0,314	0,236	0,059	0,059	0,118
C	0,984	0,472	0,905	0,976	0,314	0,236	0,059	0,059	0,118
D	0,984	0,59	0,944	0,976	0,314	0,236	0,059	0,059	0,118

5.1.2 Feedthrough modules (code 2)

See figure 2 and table 4.

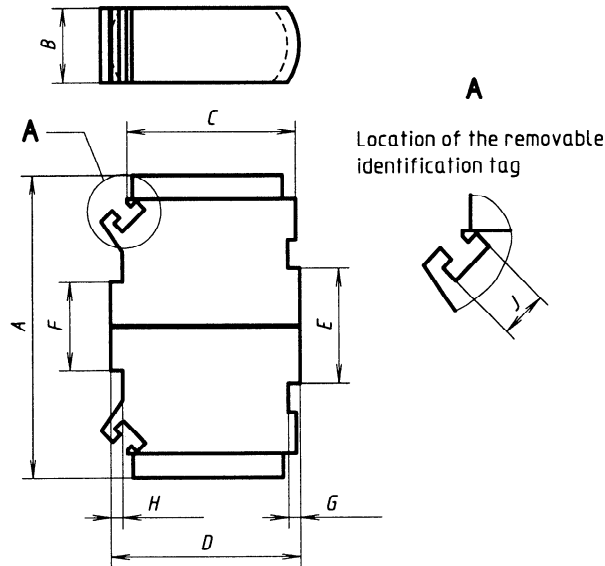


Figure 2 — Feedthrough module  
(standards.iteh.ai)


Table 4 — Feedthrough modules

Dimensions in millimetres									
Size of module	A max.	B ± 0,1	C <sup>0</sup> / <sub>-0,3</sub>	D <sup>+0,1</sup> / <sub>-0,2</sub>	E <sup>0</sup> / <sub>-0,2</sub>	F <sup>0</sup> / <sub>-0,2</sub>	G	H	J <sup>+0,2</sup> / <sub>0</sub>
A	43,5	10	21,8	24,8	16,5	12,5	1,5	1,5	3
B	40	10	21,8	24,8	16,5	12,5	1,5	1,5	3
C	50	12	23	24,8	16,5	12,5	1,5	1,5	3
D	50	15	24	24,8	16,5	12,5	1,5	1,5	3
Dimensions in inches									
Size of module	A max.	B ± 0,004	C <sup>0</sup> / <sub>-0,011</sub>	D <sup>+0,004</sup> / <sub>-0,008</sub>	E <sup>0</sup> / <sub>-0,008</sub>	F <sup>0</sup> / <sub>-0,008</sub>	G	H	J <sup>+0,008</sup> / <sub>0</sub>
A	1,712	0,393	0,858	0,976	0,649	0,492	0,059	0,059	0,118
B	1,574	0,393	0,858	0,976	0,649	0,492	0,059	0,059	0,118
C	1,968	0,472	0,905	0,976	0,649	0,492	0,059	0,059	0,118
D	1,968	0,59	0,944	0,976	0,649	0,492	0,059	0,059	0,118

5.1.3 Frames

See figures 3 to 5 and tables 5 and 6 for dimensions of frames for feedback modules.


See figure 6 and table 7 for dimensions of frames for feedthrough modules.

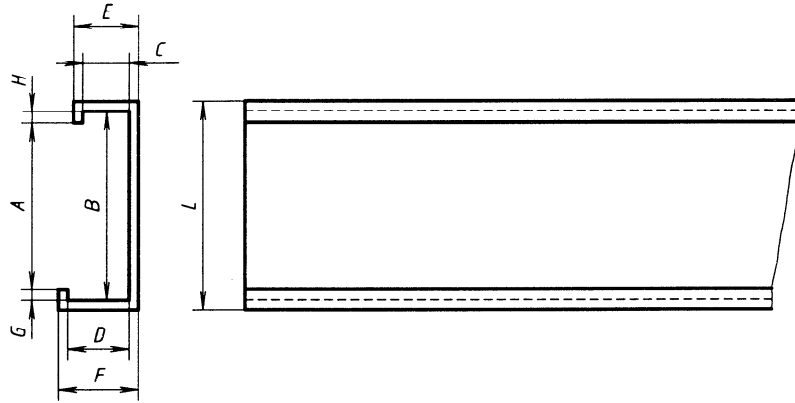

NOTE — Dimensions are given in table 5.

Figure 3 — Frame for feedback module: Standard frame P1

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

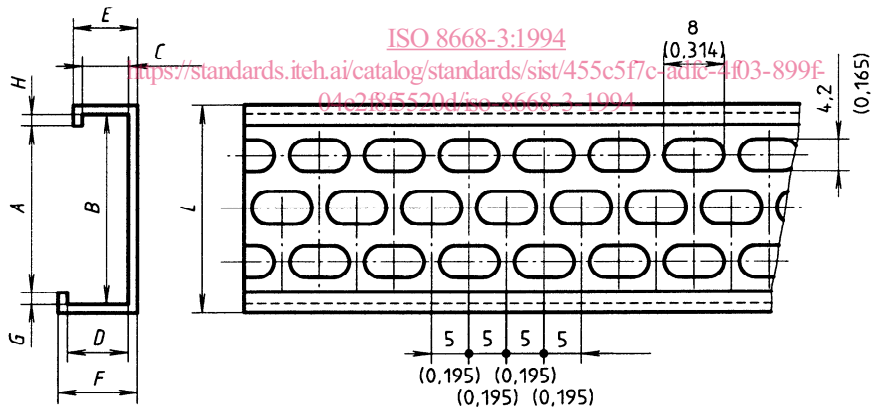


NOTE — Dimensions are given in table 5.

Figure 4 — Frame for feedback module: Perforated frame P2



**Table 5 — Frames for feedback modules (types P1 and P2)**

Dimensions in millimetres								
A	B	C	D	E	F	G	H	L
+0,3 -0,1	+0,5 -0,05	+0,3 0	+0,3 0					
22	25	6,05	8,05	8,6	10,6	1,5	1,5	27,5
Dimensions in inches								
A	B	C	D	E	F	G	H	L
+0,011 -0,004	+0,019 -0,002	+0,011 0	+0,011 0					
0,866	0,984	0,238	0,317	0,338	0,417	0,059	0,059	1,082

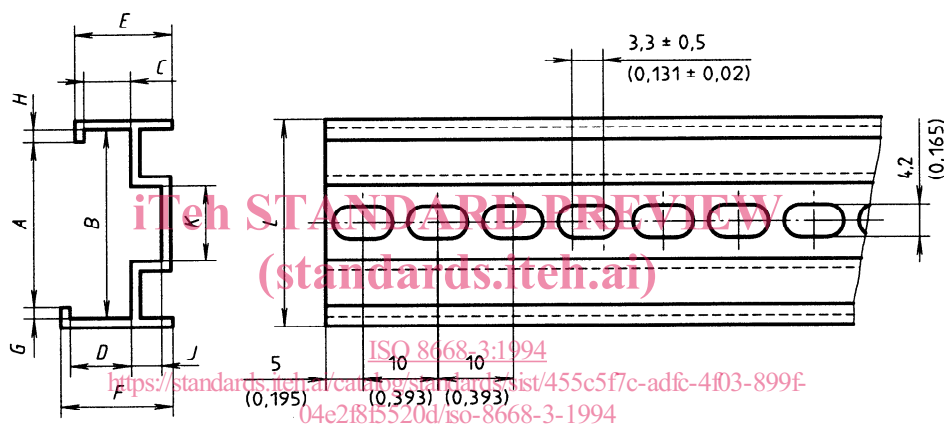

**Figure 5 — Frame for feedback module: Reinforced frame P3**

**Table 6 — Frames for feedback modules (type P3)**

Dimensions in millimetres										
A	B	C	D	E	F	G	H	J	K	L
+0,3 -0,1	+0,5 -0,05	+0,3 0	+0,3 0					+0,5 0	+0,5 0	
22	25	6,05	8,05	13	15	1,5	1,5	4	10	27,5
Dimensions in inches										
A	B	C	D	E	F	G	H	J	K	L
+0,011 -0,004	+0,019 -0,002	+0,011 0	+0,011 0					+0,019 0	+0,019 0	
0,866	0,984	0,238	0,317	0,511	0,59	0,059	0,059	0,157	0,393	1,082

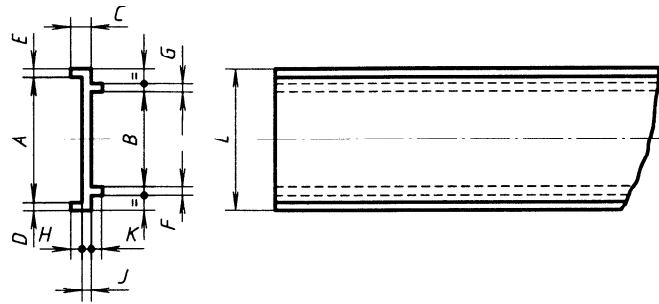


Figure 6 — Frame for feedthrough module: P4

Table 7 — Frames for feedthrough modules (type P4)

Dimensions in millimetres										
A	B	C	D	E	F	G	H	J	K	L
$\begin{matrix} +0,3 \\ 0 \end{matrix}$	$\begin{matrix} +0,3 \\ 0 \end{matrix}$		$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	
16,5	12,5	4,3	1,2	1,2	1,2	1,2	1,5	1,3	1,5	18,9
Dimensions in inches										
A	B	C	D	E	F	G	H	J	K	L
$\begin{matrix} +0,011 \\ 0 \end{matrix}$	$\begin{matrix} +0,011 \\ 0 \end{matrix}$		$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	$\begin{matrix} +0,008 \\ 0 \end{matrix}$	
0,649	0,492	0,169	0,047	0,047	0,047	0,047	0,059	0,051	0,059	0,744

iTech STANDARD PREVIEW  
(standards.iteh.ai)  
ISO 8668-3:1994  
<https://standards.iteh.ai/catalog/standards/sis/455c517c-ad1c-4103-899f-04e2f8f5520d/iso-8668-3-1994>

5.1.4 Module clamps and insert

See figures 7 and 8 for the dimensions of module clamps and inserts.



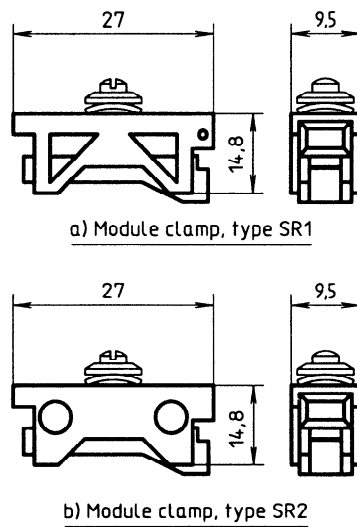


Figure 7 — Module clamps for feedback modules (code 1)

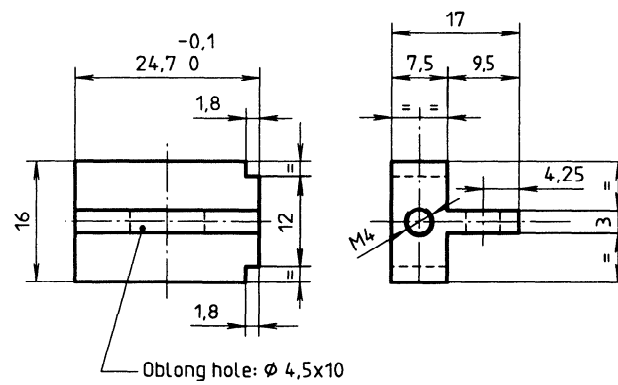

a) Module clamp, type ST1

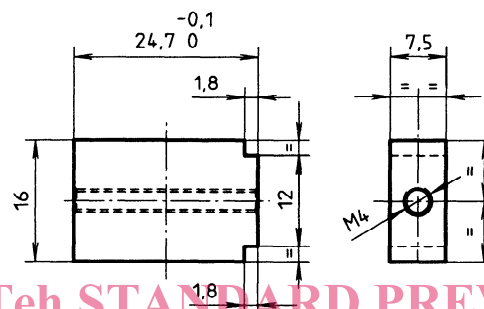

b) Inserts, type ST2

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

Figure 8 — Module clamps and inserts for feedthrough modules (code 2)

ISO 8668-3:1994  
<https://standards.iteh.ai/catalog/standards/sist/455c5f7c-adfc-4f03-899f-04e2f8f5520d/iso-8668-3-1994>

### 5.1.5 Removable identification tags

Removable identification tags shall be 5 mm × 2,8 mm × 0,5 mm. They shall have a white background and all numbers shall be printed in red.