

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Field device tool (FDT) interface specification –
Part 302: Communication profile integration – IEC 61784 CPF 2**

**Spécification des interfaces des outils des dispositifs de terrain (FDT) –
Partie 302: Intégration des profils de communication – CEI 61784 CPF 2**

<https://standards.ieh.ch/catalogue/standards/sst/2289648d-5b8e-4fbd-95d4-d2ac55fc45b1/iec-62453-302-2009>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.
Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc / iec-csc@iec.ch

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Field device tool (FDT) interface specification –
Part 302: Communication profile integration – IEC 61784 CPF 2**

**Spécification des interfaces des outils des dispositifs de terrain (FDT) –
Partie 302: Intégration des profils de communication – CEI 61784 CPF 2**

<https://standards.iec.ch/catalog/standards/sist/2880648d-5b8e-4fbd-95d4-d2ac55fc45b1/iec-62453-302-2009>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX



ICS 25.040.40; 35.100.05; 35.110

ISBN 978-2-8322-0993-6

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms, definitions, symbols, abbreviated terms and conventions	8
3.1 Terms and definitions	8
3.2 Symbols and abbreviated terms.....	8
3.3 Conventions	8
3.3.1 Data type names and references to data types	8
3.3.2 Vocabulary for requirements.....	9
4 Bus category	9
5 Access to instance and device data	9
6 Protocol specific behavior.....	9
7 Protocol specific usage of general data types	9
8 Protocol specific common data types.....	10
9 Network management data types	14
9.1 General	14
9.2 Node address	14
9.3 Scanner/master – Bus parameter set (CIP)	14
10 Communication data types	22
11 Channel parameter data types.....	24
12 Device identification	26
12.1 Device type identification data types	26
12.2 Topology scan data types	27
12.3 Scan identification data types.....	27
12.4 Device type identification data types	28
Annex A (informative) Implementation hints	30
Bibliography.....	32
Figure 1 – Part 302 of the IEC 62453 series	6
Figure A.1 – Examples of DTM naming for CompoNet.....	31
Table 1 – Protocol identifiers	9
Table 2 – Protocol specific usage of general data types.....	10
Table 3 – Simple protocol specific common data types	10
Table 4 – Structured protocol specific common data types	12
Table 5 – Simple fieldbus configuration data types	14
Table 6 – Structured fieldbus configuration data types	16
Table 7 – Simple communication data types	22
Table 8 – Structured communication data types.....	23
Table 9 – Simple channel parameter data types.....	25
Table 10 – Structured channel parameter data types	25
Table 11 – Identification data types with protocol specific mapping.....	27

Table 12 – Simple identification data types with protocol independent semantics 27

Table 13 – Structured identification data types with protocol independent semantics 27

Table 14 – Simple scan identification data types 28

Table 15 – Structured scan identification data types 28

Table 16 – Structured device type identification data types 29

Table A.1 – CompoNet relationship between Device Category, Node Address, MAC ID 30



iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/2280648d-5b8e-4fbd-95d4-d2ac55fc45b1/iec-62453-302-2009>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

**Part 302: Communication profile integration –
IEC 61784 CPF 2**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62453-302 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation.

This part, in conjunction with the other parts of the first edition of the IEC 62453 series cancels and replaces IEC/PAS 62453-1, IEC/PAS 62453-2, IEC/PAS 62453-3, IEC/PAS 62453-4 and IEC/PAS 62453-5 published in 2006, and constitutes a technical revision.

Each part of the IEC 62453-3xy series is intended to be read in conjunction with IEC 62453-2.

This bilingual version (2013-07) corresponds to the monolingual English version, published in 2009-06.

The text of this standard is based on the following documents:

FDIS	Report on voting
65E/126/FDIS	65E/139/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62453 series, under the general title *Field Device Tool (FDT) interface specification*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.


INTRODUCTION

This part of IEC 62453 is an interface specification for developers of FDT (Field Device Tool) components for function control and data access within a client/server architecture. The specification is a result of an analysis and design process to develop standard interfaces to facilitate the development of servers and clients by multiple vendors that need to interoperate seamlessly.

With the integration of fieldbuses into control systems, there are a few other tasks which need to be performed. In addition to fieldbus- and device-specific tools, there is a need to integrate these tools into higher-level system-wide planning- or engineering tools. In particular, for use in extensive and heterogeneous control systems, typically in the area of the process industry, the unambiguous definition of engineering interfaces that are easy to use for all those involved is of great importance.

A device-specific software component, called DTM (Device Type Manager), is supplied by the field device manufacturer with its device. The DTM is integrated into engineering tools via the FDT interfaces defined in this specification. The approach to integration is in general open for all kinds of fieldbuses and thus meets the requirements for integrating different kinds of devices into heterogeneous control systems.

Figure 1 shows how IEC 62453-302 is aligned in the structure of the IEC 62453 series.

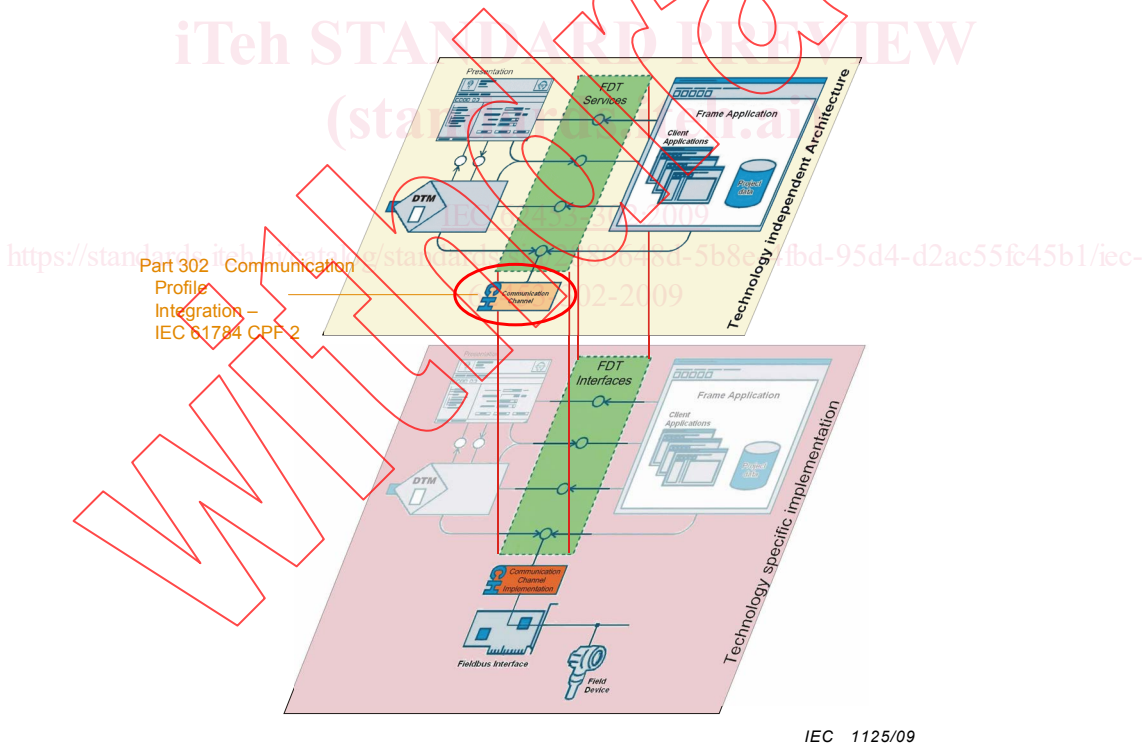

IEC 1125/09

Figure 1 – Part 302 of the IEC 62453 series

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

Part 302: Communication profile integration – IEC 61784 CPF 2

1 Scope

Communication Profile Family 2 (commonly known as CIP™¹) defines communication profiles based on IEC 61158-2 Type 2, IEC 61158-3-2, IEC 61158-4-2, IEC 61158-5-2, IEC 61158-6-2, and IEC 62026-3. The basic profiles CP 2/1 (ControlNet™²), CP 2/2 (EtherNet/IP™³), and CP 2/3 (DeviceNet™¹) are defined in IEC 61784-1 and IEC 61784-2. An additional communication profile (CompoNet™¹), also based on CIP™, is defined in [14].

This part of IEC 62453 provides information for integrating the CIP™ technology into the FDT interface specification (IEC 62453-2).

This part of IEC 62453 specifies communication and other services.

This specification neither contains the FDT specification nor modifies it.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-3-2, *Industrial communication networks – Fieldbus specifications – Part 3-2: Data-link layer service definition – Type 2 elements*

IEC 61158-4-2, *Industrial communication networks – Fieldbus specifications – Part 4-2: Data-link layer protocol specification – Type 2 elements*

IEC 61158-5-2:2007, *Industrial communication networks – Fieldbus specifications – Part 5-2: Application layer service definition – Type 2 elements*

¹ CIP™ (Common Industrial Protocol), DeviceNet™ and CompoNet™ are trade names of Open DeviceNet Vendor Association, Inc (ODVA). This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this standard does not require use of the trade names CIP™, DeviceNet™ or CompoNet™. Use of the trade names CIP™, DeviceNet™ or CompoNet™ requires permission of Open DeviceNet Vendor Association, Inc.

² ControlNet™ is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet™. Use of the trade name ControlNet™ requires permission of ControlNet International, Ltd.

³ EtherNet/IP™ is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP™. Use of the trade name EtherNet/IP™ requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.

IEC 61158-6-2:2007, *Industrial communication networks – Fieldbus specifications – Part 6-2: Application layer protocol specification – Type 2 elements*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 61784-3-2:2007, *Industrial communication networks – Profiles – Part 3-2: Functional safety fieldbuses – Additional specifications for CPF 2*

IEC 62026-3, *Low-voltage switchgear and controlgear – Controller-device interfaces (CDIs) – Part 3: DeviceNet*

IEC 62453-1:2009, *Field Device Tool (FDT) interface specification – Part 1: Overview and guidance*

IEC 62453-2:2009, *Field Device Tool (FDT) interface specification – Part 2: Concepts and detailed description*

ISO/IEC 19501:2005, *Information technology – Open Distributed Processing – Unified Modeling Language (UML) Version 1.4.2*

ISO 15745-2:2003, *Industrial automation systems and integration – Open systems application integration framework – Part 2: Reference description for ISO 11898-based control systems*

ISO 15745-3:2003, *Industrial automation systems and integration – Open systems application integration framework – Part 3: Reference description for IEC 61158-based control systems*

3 Terms, definitions, symbols, abbreviated terms and conventions

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62453-1 and IEC 62453-2 apply.

3.2 Symbols and abbreviated terms

For the purposes of this document, the symbols and abbreviations given in IEC 62453-1, IEC 62453-2 and the following apply.

CIP™	Common Industrial Protocol	
CP	Communication Profile	[IEC 61784-1]
CPF	Communication Profile Family	[IEC 61784-1]
EDS	Electronic Data Sheet	[ISO 15745]
UML	Unified Modelling Language	[ISO/IEC 19501]

3.3 Conventions

3.3.1 Data type names and references to data types

The conventions for naming and referencing of data types are explained in IEC 62453-2 Clause A.1

3.3.2 Vocabulary for requirements

The following expressions are used when specifying requirements.

Usage of “shall” or “mandatory”	No exceptions allowed.
Usage of “should” or “recommended”	Strong recommendation. It may make sense in special exceptional cases to differ from the described behavior.
Usage of “can” or “optional”	Function or behavior may be provided, depending on defined conditions.

4 Bus category

IEC 61784 CPF 2 protocol is identified in the protocolId element of the structured data type 'fdt:BusCategory' by the following unique identifiers, as specified in Table 1.

Table 1 – Protocol identifiers

Identifier value	ProtocolId name	Description
19B91472-EDB9-4e8c-BB61-516EEC79C1C0	'CIP DeviceNet'	Support for CP 2/3 (DeviceNet)
6CD80F51-019D-4e60-AEAC-B10144943B4B	'CIP EthernetIP'	Support for CP 2/2 (EtherNet/IP)
C290CE23-62EA-478c-97F2-97EFEC602E05	'CIP ControlNet'	Support for CP 2/1 (ControlNet)
089BB2BC-B75A-11DB-8314-0800200C9A66	'CIP CompoNet'	Support for CompoNet

5 Access to instance and device data

The services InstanceDataInformation and DeviceDataInformation shall provide access at least to all parameters defined in the Params section of the EDS.

6 Protocol specific behavior

IEC 61784 CPF 2 protocol has specific requirements related to configuration of fieldbus masters.

It is very important to keep both data provider and consumer synchronized. Therefore data provider shall be informed if the provided data has been modified. For instance, in case the provided data is modified by the scanner/master DTM, then the slave/adaptor DTM shall be provided with the new data set.

NOTE For a description of data exchange between DTMs, see 6.3 of IEC 62453-2 (Configuration of fieldbus master or communication scheduler).

7 Protocol specific usage of general data types

Table 2 shows how general data types, defined in IEC 62453-2 within the namespace 'fdt', are used with IEC 61784 CPF 2 devices.

According to IEC 62453-2, at least one set of semantic information (one per supported fieldbus protocol) shall be provided for each accessible data object, using the 'SemanticInformation' general data type. The corresponding data type 'applicationDomain' shall have the value "FDT_CIP" and the data type 'semanticId' shall have an appropriate value, as specified in Table 2).

Table 2 – Protocol specific usage of general data types

Data type	Description for use
fdt:address	The "address" data type is not mandatory for the exposed parameters in the DTMs. But if the address will be used, the string shall be constructed according to the rules of the semanticId. That means the data type "semanticId" is always the same as the data type "address"
fdt:protocolId	See Clause 4.
fdt:deviceTypeId	As defined in Identity object (see 6.2.1.2.2 of IEC 61158-5-2)
fdt:deviceTypeInfo	A CIP DTM shall provide the path to the device specific EDS file with this data type. For DTM certification, the path to the certified EDS file shall be provided here. NOTE The EDS information is accessible via • IDtmParameter::GetParameters() • IDtmInformation::GetInformation()
fdt:deviceTypeInfoPath	Path to the EDS file which is also provided via the attribute 'deviceTypeInfo' The attribute contains full path to the EDS file including the file name in URL notation. For CIP devices, it is mandatory to provide information for this data type. This attribute is specific to FDT 1.2.1(see IEC 62453-2 and [8]), therefore it shall not be provided if DTM is running in FDT 1.2 (see [7]) based Frame Applications
fdt:manufacturerId	As defined in Identity object (see 6.2.1.2.2 of IEC 61158-5-2)
fdt:semanticId fdt:applicationDomain	The applicationDomain is: FDT_CIP. The data that is contained in the objects are addressable via classId, instanceId and attributeId. This data may be variables or composed blocks of data. The semanticId is directly based on the CIP address information: The semanticId is: CLASSxx.INSTANCEyy.ATTRIBUTEzz xx classId yy instanceId zz attributeId xx, yy, zz are based on decimal format without leading '0'. Since 'ATTRIBUTE' is conditional in CIP in certain cases, it can be left out. In this case, the semanticId is: CLASSxx.INSTANCEyy
fdt:tag	CIP assembly, parameter name or name of a I/O connection (in the context of channel data)

8 Protocol specific common data types

Table 3 and Table 4 specify the protocol specific common data types, which are used in the definition of other data types.

The data types described in this clause are defined for following namespace:
Namespace: cip

Table 3 – Simple protocol specific common data types

Data type	Definition	Description
attributeId	USINT	CIP attribute identifier
bitOffset	UDINT	Bit offset of a parameter in an assembly
cipStatus	UINT	cipStatus represents the Status (attribute 5) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2

Data type	Definition	Description
classId	UINT	CIP class identifier
constValue	UDINT	Represents the constant value used in the data type Constant
dataType	enumeration (byte float double int unsigned enumerator bitEnumerator index ascii password bitString hexString date time dateAndTime duration binary structured dtmSpecific)	Defines the different enumerations of the CIP data types
deviceType	UINT	Represents the DeviceType (attribute 2) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2
ePath	ARRAY OF USINT	CIP EPATH, see 4.1.9 of IEC 61158-6-2
extendedIdentifier	STRING	Represents the address of the CIP device in the CIPNodeID if the address used on this CIP network is a name or IP-address. The extendedIdentifier shall be used for CompoNet networks to cover the CompoNet MAC ID. See also shortIdentifier
instanceId	UINT	CIP object instance identifier
majorRevision	USINT	Represents the Major Revision (attribute 4.1) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2
minorRevision	USINT	Represents the Minor Revision (attribute 4.2) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2
portNumber	UINT	Represents the portnumber within a CIP bridging or routing device to route a message to another segment
productCode	UINT	Represents the Product code (attribute 3) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2
productName	STRING	Represents the Product name (attribute 7) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2
serialNumber	ARRAY OF USINT	Represents the Serialnumber (attribute 6) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2. If the serialNumber is not known because of offline configuration then a 0 should be returned
serviceCode	USINT	CIP service code. This is a function, or method, supported by a CIP object or attribute
serviceName	STRING	CIP service name. This is a function, or method, supported by a CIP object or attribute. This attribute provides additional human readable information about the related service code
shortIdentifier	USINT	Represents the address of the CIP device in the CIPNodeID if the address used on this CIP-network is a simple address. See also extendedIdentifier
symbolicAddress	STRING	Represents a name of a component inside the device
vendorID	UINT	Represents the Vendor ID (attribute 1) of the Identity object. See 6.2.1.2.2 of IEC 61158-5-2

Table 4 – Structured protocol specific common data types

Data type	Definition			Description
	Elementary data type	Usage	Multiplicity	
CIPDevice	STRUCT			Specifies a CIP device. CIPDevice contains manufacturer and device information (the Identity Object), which is present in every CIP node
	cipStatus	M	[1..1]	
	CIPPath	M	[1..1]	
	CIPDeviceIdentity	M	[1..1]	
CIPDeviceIdentity	STRUCT			Represents the static part of the Identity object of the CIP device. See 6.2.1.2.2 of IEC 61158-5-2
	vendorID	M	[1..1]	
	deviceType	M	[1..1]	
	productCode	M	[1..1]	
	majorRevision	M	[1..1]	
	minorRevision	M	[1..1]	
	serialNumber	M	[1..1]	
	productName	M	[1..1]	
CIPNodeID	STRUCT			Identifier used to identify a particular node (device) on a CIP network, e.g. CIP MAC (Media Access Control) ID (1 byte) for DeviceNet and ControlNet; IP address for EtherNet/IP. Since the size differs from protocol to protocol, structure is used which contains 2 attributes: extended identifier (n bytes string) and short identifier (1 byte unsigned integer) and only one of them shall be used
	choice of	M	[1..1]	
	ExtendedIdentifier	S	[1..1]	
	ShortIdentifier	S	[1..1]	
CIPObjectAddress	STRUCT			CIP object address as CIPObjectID, CIPSymbolicAddress or HexAddress
	choice of	M	[1..1]	
	CIPObjectID	S	[1..1]	
	CIPSymbolicAddress	S	[1..1]	
CIPObjectID	STRUCT			The CIP classID, instanceID and (conditional) attributeID 'address' information for a CIP object and attribute. If used in a Process Channel this is likely to be either an Assembly object or a Parameter object
	classID	M	[1..1]	
	instanceID	M	[1..1]	
	attributeID	O	[0..1]	

Data type	Definition			Description
	Elementary data type	Usage	Multiplicity	
CIPPath	STRUCT			The full 'address' of the CIP node (device). In general this consists of the Node ID stored in the CIPNodeID element. The RoutingPath element is used to transfer additional routing information that can be used by the CIP FDT communication component
	RoutingPath	O	[0..1]	
	CIPNodeID	M	[1..1]	
CIPSymbolicAddress	STRUCT			classId, instanceId and attributeId does not necessarily be known, a symbolic address could also be used. CIPSymbolicAddress, HexAddress or CIPObjectID could be used for DataExchangeRequest
	symbolicAddress	M	[1..1]	
Constant	STRUCT			A constant value
	constValue	M	[1..1]	
ExtendedIdentifier	STRUCT			See attribute extendedIdentifier
	extendedIdentifier	M	[1..1]	
HexAddress	STRUCT			CIP object address as ePath
	ePath	O	[0..1]	
LinkAddress	STRUCT			Represents the CIPNodeID within a Segment
	CIPNodeID	M	[1..1]	
ParameterReference	STRUCT			Reference to a description of a parameter
	fdt:idref	M	[1..1]	
	bitOffset	O	[0..1]	
ReservedBits	STRUCT			Used wherever reserved bits are needed
RoutingPath	STRUCT			Any additional CIP network routing information, which can be understood by the Communication Channel
	Segment	M	[1..1]	
Segment	STRUCT			Represents the path a message shall follow to reach the addressed CIP device
	portNumber	M	[1..1]	
	LinkAddress	M	[1..1]	
	Segment	O	[0..1]	
Service	STRUCT			CIP service identified by serviceCode and serviceName. CIP service code. This is a function, or method, supported by a CIP object or attribute
	serviceCode	M	[1..1]	
	serviceName	O	[0..1]	
ShortIdentifier	STRUCT			See attribute shortIdentifier
	shortIdentifier	M	[1..1]	