

INTERNATIONAL STANDARD

**ISO
8821**

First edition
1989-06-01

Mechanical vibration — Balancing — Shaft and fitment key convention

*Vibrations mécaniques — Équilibrage — Convention relative aux clavettes d'arbres
et aux éléments rapportés*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8821:1989

<https://standards.iteh.ai/catalog/standards/sist/8d1897ed-2dd4-4185-afd4-527d6322f481/iso-8821-1989>



Reference number
ISO 8821 : 1989 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 8821 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration and shock*.

Annexes A, B, C, D and E of this International Standard are for information only.

© ISO 1989

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

There are currently three methods or “conventions” for balancing shafts or rotors and their fitments coupled together with keys:

- full-key convention;
- half-key convention;
- no-key convention.

It is often impossible or economically unreasonable to balance rotors and fitments after they have been assembled; they are, therefore, balanced separately. An appropriate balance tolerance is applied to each so that, when rotor and fitment are coupled together with the appropriate key, the assembly will meet the required balance tolerance and vibration severity level. However, if a different key convention has been used when balancing the shaft or rotor than the one used for balancing the fitment, it is quite likely that the assembly will have balancing errors exceeding the permissible residual unbalance.

ISO 8821:1989

This International Standard is intended to unify the key conventions used throughout the world. When consistently used, it will result in compatibility of shafts or rotors and fitments so that they can be balanced by different suppliers and, after being assembled, will meet balance and/or vibration tolerance levels for that assembly.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

[ISO 8821:1989](#)

<https://standards.iteh.ai/catalog/standards/sist/8d1897ed-2dd4-4185-afd4-527d6322f481/iso-8821-1989>

Mechanical vibration — Balancing — Shaft and fitment key convention

1 Scope

1.1 This International Standard specifies a single convention for balancing the individual components (shafts or rotors, and fitments) of a keyed assembly. It is intended to provide compatibility of all balanced components so that when they are assembled they will meet the overall balance and/or vibration tolerance levels for that assembly.

1.2 This International Standard requires that half keys be used when balancing the individual components of a keyed assembly to avoid the balancing errors created if full keys or no keys were used.

1.3 This International Standard applies to rotors balanced in balancing machines, in their own housings, or *in situ*. This key convention should also be applied when measuring residual unbalance and vibration severity of rotors utilizing keyways but to which the fitments have not yet been assembled.

1.4 Although the figures in this International Standard show keys of constant rectangular or square cross-section, mounted parallel to the shaft axis, this International Standard applies also to keys mounted on tapered shaft surfaces, to woodruff, gib, dowel and other special keys. The principle of the half-key convention as outlined in the definition and elsewhere is then applied as is appropriate to the particular shape and location of the special key.

1.5 This International Standard includes instructions for the implementation (see annex A) and for the transition period that will occur as the half-key convention is adopted (see annex B).

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1925 : 1981, *Balancing — Vocabulary*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 1925, together with the following, apply.

3.1 fitment: Component without its own shaft which has to be mounted on a shaft or mandrel before its unbalance can be determined.

Examples include couplings, pulleys, pump impellers, blower fans and grinding wheels.

NOTE — A fitment becomes a rotor when it is placed on a shaft with journals (see also the definition of “rotor” in ISO 1925). This could not only be a balancing mandrel but also the shaft extension of an armature, which by itself already is a rotor. To avoid confusion between fitment and rotor, this International Standard hereafter uses only the terms fitment and shaft, whereby the latter may be any kind of shaft, for example a balancing mandrel, an armature shaft, turbine shaft, pump shaft, etc.

3.2 key; full key: Locking device used to prevent rotation between a fitment and its mating component, usually a shaft.

NOTES

- 1 Since the full key is used in the final assembly, it is often also called the final assembly key.
- 2 Figure 1 shows various types of key and keyway configurations.

3.3 half key: Key used in balancing, having the unbalance value of that portion of the final (full) key which will occupy either the shaft keyway or the fitment keyway in the final assembly.

NOTES

- 1 The unbalance value of the half key for a given shaft may differ from that needed for the mating fitment (of equal keyway length) due to differences in distance from the shaft centreline, depth of keyways, and clearances.
- 2 The required unbalance value for a half key may be calculated by assuming that the full key is separated into two half keys along the contoured parting line between shaft and fitment, taking half the height clearances of key and keyway in each of the key halves into consideration (see figure 2).

4 Half-key convention

4.1 Description

The half-key convention requires that a half key be used in the shaft keyway while balancing the shaft without its fitment. A

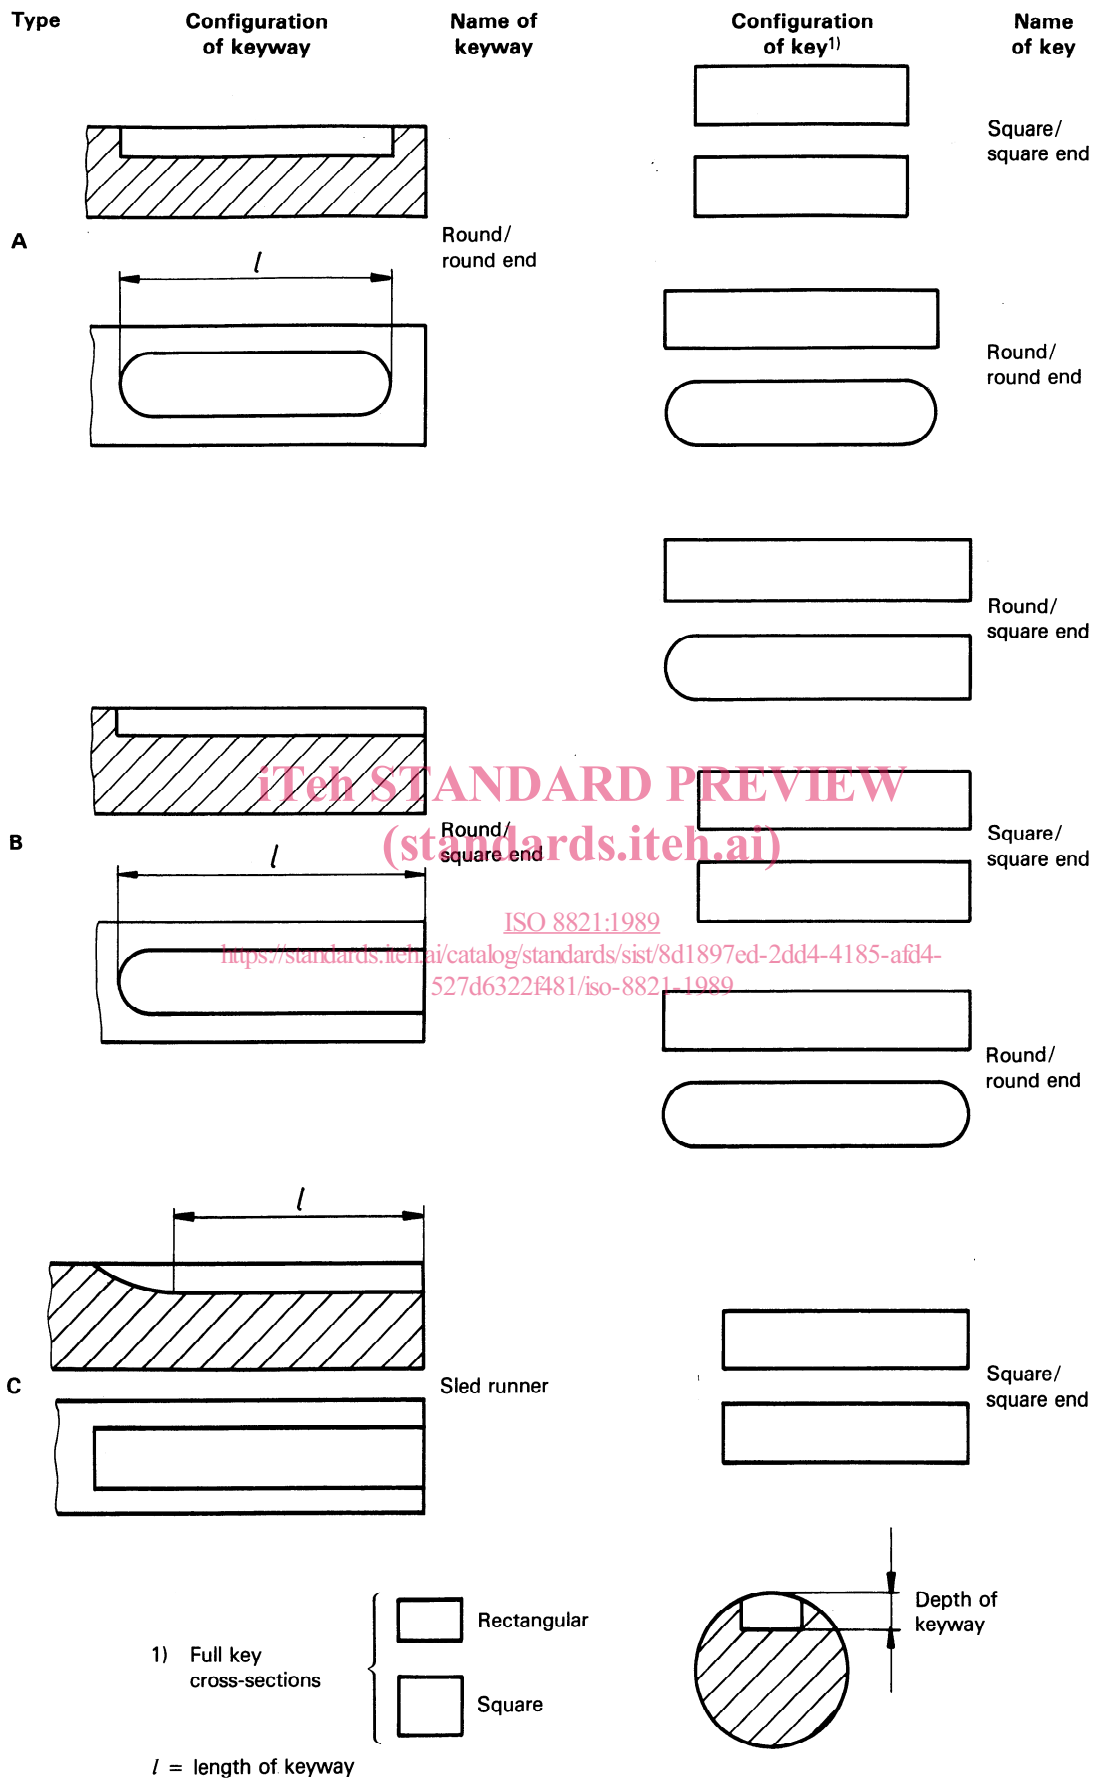


Figure 1 — Major types of shaft keyways and keys (see also ISO/R 773 and ISO/R 775)

complementary half-key is used while balancing the fitment on a balancing mandrel, provided it has no keyways. If the mandrel has keyways, see the alternative methods specified in A.2.2. The axial location of the centre of gravity of the half key should be the same as that of the full key in the final assembly (see figure C.2).

The use of the half-key convention will provide a uniform method for balancing shafts and fitments joined together by keys. It will eliminate balancing errors and therefore excessive residual unbalance (and/or machine vibration) caused by the use of different key conventions, and avoid the creation of internal bending moments in assemblies (as would be caused by the use of full keys during balancing).

4.2 Marking

4.2.1 After balancing, the end of the shaft adjacent to the keyway shall be permanently marked with the letter H to indicate that balancing was performed using the half-key convention. Permanent marking using metal stamps or vibratory engravers is recommended, but a permanent or indelible ink may be used.

If the shaft face is too small for marking, the bottom of the keyway may be used.

4.2.2 After balancing, the face of the fitment adjacent to the keyway shall be permanently marked with the letter H to indicate that balancing was performed using the half-key convention. This letter should be readily visible when the fitment is joined to the shaft. Permanent marking using metal stamps or vibratory engravers is recommended, but a permanent or indelible ink may be used.

4.2.3 When balancing a replacement shaft or fitment the known mating part of which has not been balanced using a half key, it is permissible to balance the particular component with the corresponding key convention. In this special case, both components shall be permanently marked with an identification letter corresponding to the key convention used, as follows:

- a) components balanced using the full-key convention shall be marked with the letter F adjacent to the keyway:
- b) components balanced using the no-key convention shall be marked with the letter N adjacent to the keyway.

4.2.4 The marking of the shaft and the fitment with the letter H may be omitted if confusion as to which key convention was used is unlikely.

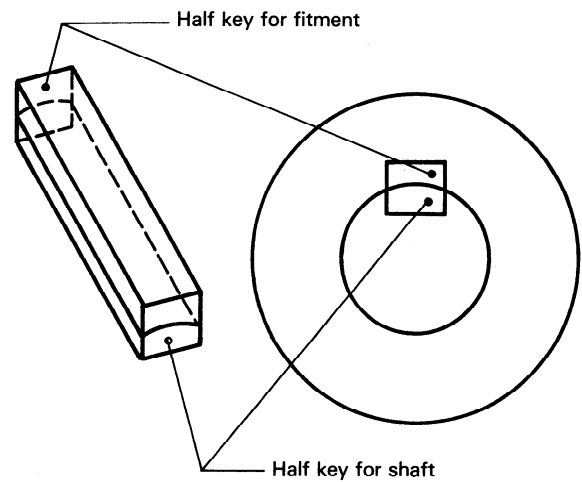


Figure 2 — Contoured half-key set

5 Implementation

All manufacturers of original parts and processed components shall comply with the half-key convention of balancing and mark each newly manufactured rotor and fitment with the letter H.

Change-over of equipment in service to the half-key convention with proper identification of the shaft and fitment during the first repair balancing operation is encouraged; in any case, the marking shall be added.

Annex B gives a transition strategy.

Annex A (informative)

Recommendations for the implementation of the half-key convention

A.1 Implementation date

To avoid undue confusion between manufacturers and users as to the key convention used, it is recommended that implementation of the half-key convention be accomplished by 1 January 1990.

A.2 Half-key requirements

A.2.1 A half-key is required for the shaft keyway.

A.2.2 For a fitment with a single keyway, one of the following requirements is to be met:

- a) when the mandrel has no keyway: use one half key;
- b) when the mandrel has two identical keyways 180° opposite each other: use one full key and one half key of equal length;
- c) when the mandrel has a single keyway: use one half key (for balancing the mandrel) and one full key (for balancing the mandrel/fitment assembly).

NOTES

1 Mandrel construction using requirement a) or b) are preferred because they are inherently balanced.

2 The balancing mandrel should have the same diametral tolerances as the shaft it is intended to simulate. The mandrel should also have correction planes on it to allow for unbalance correction, index balancing, and biasing.

A.2.3 Special keys such as woodruff, gib or tapered keys require individual consideration.

A.2.4 If a full key is shipped with the shaft, its length is obvious and therefore permits determination of the proper half key for the fitment (see also clause C.4). If no key is shipped with the shaft, the length of the half-key used originally for balancing the shaft is assumed to be the same as the length of the shaft keyway (see also figure 1, dimension *l*).

A.2.5 Half keys used for balancing should always be made of material having the same specific weight as the final key. Unless specifically stated otherwise, it is to be assumed that final keys are made of steel. Therefore, half keys should also be made of steel.

A.2.6 The half key should be held in place on the shaft by means that introduce negligible unbalance, for example fibreglass tape, but will prevent the half key from accidentally separating from the keyway.

A.3 Exceptions

A.3.1 If a shaft or fitment is provided with two equal keyways 180° opposite each other and two keys are used in the final assembly, it is permissible to balance without keys. This fulfils the requirement of the half-key convention. If the two keyways are not equal or are positioned other than 180° opposite each other, two half keys are required for balancing the shaft and two more for the fitment.

A.3.2 If the vibration tolerance levels of certain assemblies are generous enough to be not exceeded by the change in key convention, or if a manufacturer has a limited number of users who require no shaft repair by or replacement from alternative sources, it may be acceptable to retain a key convention other than the half-key convention; however, all shafts should be marked accordingly.

A.3.3 A half key is not used in certain couplings because they are balanced by the manufacturer without a keyway being machined into the bore. The user of the coupling generally enlarges the bore and machines the keyway to his requirements without rebalancing. This method basically complies with the half-key convention, provided the final key has approximately the same length as the keyway.

A.4 Past key convention practice

After implementation of the half-key convention, there will be in existence for many years shafts and fitments which were manufactured prior to the issue of this International Standard. When such an older (unmarked) shaft or fitment needs to be rebalanced without its mating component being also available for rebalancing, it will be necessary to know to what key convention the other (unavailable) component was balanced. The on-hand component must then be rebalanced to the same convention (and marked), otherwise the rebalancing work will most probably produce unsatisfactory results.

To help determine the key convention to which the other (unavailable) component probably was balanced, table A.1 lists the key conventions used in the ISO Participating and Observer Countries in the past.

Table A.1 — Worldwide past usage of key conventions

Country (Organization)	Shaft key method used
Australia (SAA)	Not available (N/A)
Austria (ON)	N/A
Belgium (IBN)	N/A
Canada (SCC)	Half key
China (CSBS)	N/A
Czechoslovakia (CSN)	Full key
Denmark (DS)	N/A
Egypt (EOS)	N/A
France (AFNOR)	Full key
Germany (DIN)	Full key since approximately 1965
Hungary (MSZH)	N/A
Italy (UNI)	N/A
Japan (JISC)	Half key
Mexico (DGN)	N/A
Netherlands (NNI)	N/A
Romania (IRS)	N/A
South Africa (SABS)	N/A
Sweden (SIS)	Full key on most electrical motors since 1978-01-01. Other rotating machinery indeterminate.
Switzerland (SNV)	N/A
United Kingdom (BSI)	Half key prior to 1978-01-01, then full key.
USA (ANSI)	Half key
<p>NOTES</p> <p>1 Where no starting date is shown, it is assumed that no convention other than that listed was used previously.</p> <p>2 Due to European harmonization efforts, it can be assumed that many European countries have used the full-key convention since 1978-01-01.</p>	