

TECHNICAL SPECIFICATION

SPÉCIFICATION TECHNIQUE



**Rotating electrical machines –
Part 31: Selection of energy-efficient motors including variable speed
applications – Application guide**

**Machines électriques tournantes –
Partie 31: Choix des moteurs éconergétiques incluant les applications à vitesse
variable – Guide d'application**

<https://standards.iteh.ai/catalog/standards/iec/3709/256-3875-4a1e-8e1d-4b98055187ec/iec-ts-60034-31-2010>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

A propos de la CEI

La Commission Electrotechnique internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: www.iec.ch/searchpub/cur_fut-f.htm

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: www.iec.ch/online_news/justpub

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: www.iec.ch/webstore/custserv/custserv_entry-f.htm

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: csc@iec.ch

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00

TECHNICAL SPECIFICATION

SPÉCIFICATION TECHNIQUE



**Rotating electrical machines –
Part 31: Selection of energy-efficient motors including variable speed
applications – Application guide**

**Machines électriques tournantes –
Partie 31: Choix des moteurs éconergetiques incluant les applications à vitesse
variable – Guide d'application**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX



ICS 29.160

ISBN 978-2-88910-023-1

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Normative references.....	8
3 Terms, definitions and symbols.....	8
3.1 Terms and definitions.....	8
3.2 Symbols.....	8
4 General.....	9
5 Efficiency.....	10
5.1 General.....	10
5.2 Motor losses.....	11
5.3 Additional motor-losses when operated on a frequency converter.....	12
5.4 Motors for higher efficiency classes.....	12
5.5 Variations in motor losses.....	13
5.6 Part load efficiency.....	14
5.7 Efficiency testing methods.....	15
5.8 Power factor (see Figure 4).....	16
5.9 Matching motors and variable frequency converters.....	17
5.10 Motors rated for 50 Hz and 60 Hz.....	18
5.11 Motors rated for different voltages or a voltage range.....	20
5.12 Motors rated for operation at frequencies other than 50/60 Hz.....	20
5.13 Variable frequency converter efficiency.....	20
5.14 Frequency converter power factor.....	22
6 Environment.....	22
6.1 Starting performance.....	22
6.2 Operating speed and slip.....	23
6.3 Effects of power quality and variation in voltage and frequency.....	23
6.4 Effects of voltage unbalance.....	23
6.5 Effects of ambient temperature.....	24
7 Applications.....	24
7.1 General.....	24
7.2 Energy savings by speed control (variable speed drives, VSD).....	24
7.3 Correct sizing of the motor.....	24
7.4 Continuous duty application.....	25
7.5 Applications involving extended periods of light load operations.....	25
7.6 Applications involving overhauling loads.....	26
7.7 Applications where load-torque is increasing with speed (pumps, fans, compressors, etc.).....	26
7.8 Applications involving frequent starts and stops and/or mechanical braking.....	27
7.9 Applications involving explosive gas or dust atmospheres.....	27
8 Economy.....	28
8.1 Relevance to users.....	28
8.2 Initial purchase cost.....	28
8.3 Operating cost.....	29
8.4 Rewinding cost.....	30
8.5 Payback time.....	31

8.6 Life cycle cost	31
9 Maintenance.....	32
Annex A (informative) Super-premium efficiency (IE4)	34
Bibliography.....	40
Figure 1 – Overview of different areas for savings of electrical energy with drive systems	9
Figure 2 – Typical losses of energy-efficient motors, converters and electro-mechanical brakes	10
Figure 3 – Typical efficiency versus load curve bands for three-phase, cage-induction motors of different output power ranges (approximately 1,1 kW, 15 kW and 150 kW).....	14
Figure 4 – Typical power factor versus load curve bands for three-phase, cage-induction motors of different output power ranges (approximately 1,1 kW, 15 kW and 150 kW).....	16
Figure 5 – Typical reduction of energy efficiency in %-points for 4-pole, low-voltage motors between 50 Hz and 60 Hz when compared at the same torque (60 Hz power 20 % increased).....	19
Figure 6 – Typical reduction of energy efficiency in %-points for 4-pole, low-voltage motors between 50 Hz and 60 Hz when compared at the same output power (60 Hz torque 20 % reduced)	19
Figure 7 – Typical efficiency of indirect three-phase voltage source type converters with a passive front-end for typical load points of pumps, fans and compressors	20
Figure 8 – Typical efficiency of indirect three-phase voltage source type converters with a passive front-end for typical load points of constant torque	21
Figure 9 – Typical variations of current, speed, power factor and efficiency with voltage for constant output power	23
Figure 10 – Potential energy savings by improvement of efficiency classes for motors running at rated load	25
Figure 11 – Typical torque versus speed curves for 11 kW, 4-pole, three-phase, cage-induction motors and load versus speed curves for speed-square-loads	26
Figure 12 – 11 kW IE3 motor operated at full load, 4 000 operating hours per year, 15 years life cycle.....	28
Figure 13 – Example of a load factor graph: fraction of annual operating hours	29
Figure 14 – Life cycle cost analysis of an 11 kW motor operating at full load	32
Figure A.1 – IE4 efficiency limits	39
Table 1 – Loss distribution in three-phase, 4-pole, cage-induction electric motors	12
Table 2 – Exemplary efficiency calculation of a motor when operated at 50 Hz and 60 Hz with the same torque, using a 50 Hz motor rating as the basis.....	18
Table 3 – Loss distribution for low-voltage U-converters	21
Table 4 – Example of changing of efficiency, speed and torque demand with energy efficiency class of three 11 kW, 50 Hz motors in the same application	27
Table 5 – Average lifecycles for electric motors	30
Table A.1 – Interpolation coefficients	35
Table A.2 – Nominal limits (%) for super-premium efficiency (IE4)	35
Table A.3 – Standard power in kW associated with torque and speed for line-operated motors	36
Table A.4 – Nominal limits for super-premium efficiency (IE4) for 50 Hz line operated motors	37

Table A.5 – Nominal limits for super-premium efficiency (IE4) for 60 Hz line operated motors 38

Witholdawm

iTen Standards
(<https://standards.iteh.ai>)
Document Preview

<https://standards.iteh.ai/can/view/standard/iec/3709/1256-3875-4a1e-8e1d-4b98055187ec/iec-ts-60034-31-2010>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ROTATING ELECTRICAL MACHINES –

**Part 31: Selection of energy-efficient motors including
variable speed applications – Application guide**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC 60034-31, which is a technical specification, has been prepared by IEC technical committee 2: Rotating machinery.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
2/1575/DTS	2/1594/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60034 series, published under the general title *Rotating electrical machines*, can be found on the IEC website.

NOTE A table of cross-references of all IEC TC 2 publications can be found in the IEC TC 2 dashboard on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be be

- transformed into an International standard,
- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The present technical specification gives technical guidelines for the application of energy-efficient motors in constant-speed and variable speed applications. It does not cover aspects of a purely commercial nature.

Standards developed by IEC technical committee 2 do not deal with methods of how to obtain a high efficiency but with tests to verify the guaranteed value. IEC 60034-2-1 is the most important standard for this purpose.

For approximately 15 years regional agreements were negotiated in many areas of the world regarding efficiency classes of three-phase, cage-induction motors with outputs up to about 200 kW maximum, as motors of this size are installed in high quantities and are for the most part produced in series production. The design of these motors is often driven by the market demand for low investment cost, hence energy efficiency was not a top priority.

In IEC 60034-30, IE efficiency classes for single-speed cage-induction motors have been defined and test procedures specified:

IE1	Standard efficiency
IE2	High efficiency
IE3	Premium efficiency
IE4	Super-premium efficiency

Determination of efficiency for motors powered by a frequency converter will be included in IEC standard 60034-2-3.

However, for motors rated 1 MW and above, which are usually custom made, a high efficiency has always been one of the most important design goals. The full-load efficiency of these machines typically ranges between 95 % and 98 %. Efficiency is usually part of the purchase contract and is penalized if the guaranteed values are not met. Therefore, these higher ratings are of secondary importance when assigning efficiency classes.

With permission from the National Electrical Manufacturers Association (NEMA), some parts of this TS are based on NEMA MG 10, *Energy Management Guide For Selection and Use of Fixed Frequency Medium AC Squirrel-Cage Polyphase Induction Motors*.

ROTATING ELECTRICAL MACHINES –

Part 31: Selection of energy-efficient motors including variable speed applications – Application guide

1 Scope

This part of IEC 60034 provides a guideline of technical aspects for the application of energy-efficient, three-phase, electric motors. It not only applies to motor manufacturers, OEMs (original equipment manufacturers), end users, regulators and legislators but to all other interested parties.

This technical specification is applicable to all electrical machines covered by IEC 60034-30. Most of the information however is also relevant for cage-induction machines with output powers exceeding 375 kW.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60034-1, *Rotating electrical machines – Part 1: Rating and performance*

IEC 60034-30, *Rotating electrical machines – Part 30: Efficiency classes of single-speed three-phase, cage induction motors (IE-code)*

3 Terms, definitions and symbols

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60034-1 and in IEC 60034-30 apply.

3.2 Symbols

η_n is the nominal efficiency, %

η_N is the rated efficiency, %

f_N is the rated frequency, Hz

n_N is the rated speed, min^{-1}

P_N is the rated output power, kW

T_N is the rated output torque, Nm

U_N is the rated voltage, V

4 General

	Electrical components	Mechanical components	Application	Factory automation	Energy recovery
Proper and regular maintenance					
S1 Continuous duty	Energy efficiency motors	Energy efficient, gearboxes, bolts, ...	Variable speed drive systems	Most efficient power supply	
	Power factor correction devices	Energy efficient pumps, fans, compressors, ...	Reducing elect. transmission losses	Low-energy mode during standstill	
S2 Short-time	Use most economical components				
S3...S10 Intermittent duty	Soft-start with frequency control	Minimize rotating inertia	Variable speed drive systems	Most efficient power supply	Regenerative braking
			Optimized mass and flow	Low-energy mode during standstill	DC-link coupling
					Batteries, ultra-cap, fly-wheels etc...

IEC 700/10

Figure 1 – Overview of different areas for savings of electrical energy with drive systems

Energy can be saved in different areas of electrical drive systems depending on the duty type (continuous or intermittent).

In continuous duty applications, improved efficiency of the electrical motor is beneficial. An improved power factor (frequency converter, synchronous motor) can help reduce I²R losses in cables. Mechanical optimizations (gearbox, belts, pumps, fans, etc.) may lead to much greater savings than improvements of the electrical motor.

The application should also be regarded as well because, in many cases, the main part of the energy saving can be obtained by managing the application load from the system point of view. For that purpose, a demand-oriented speed control is often helpful.

Proper maintenance is usually beneficial. Many industrial plants have a high energy consumption within the low voltage control circuits (typically 24 V power supply). Therefore, high-efficiency low-voltage power supplies should be used. If possible, the factory should also be shut down during long standstill periods (weekends, holidays).

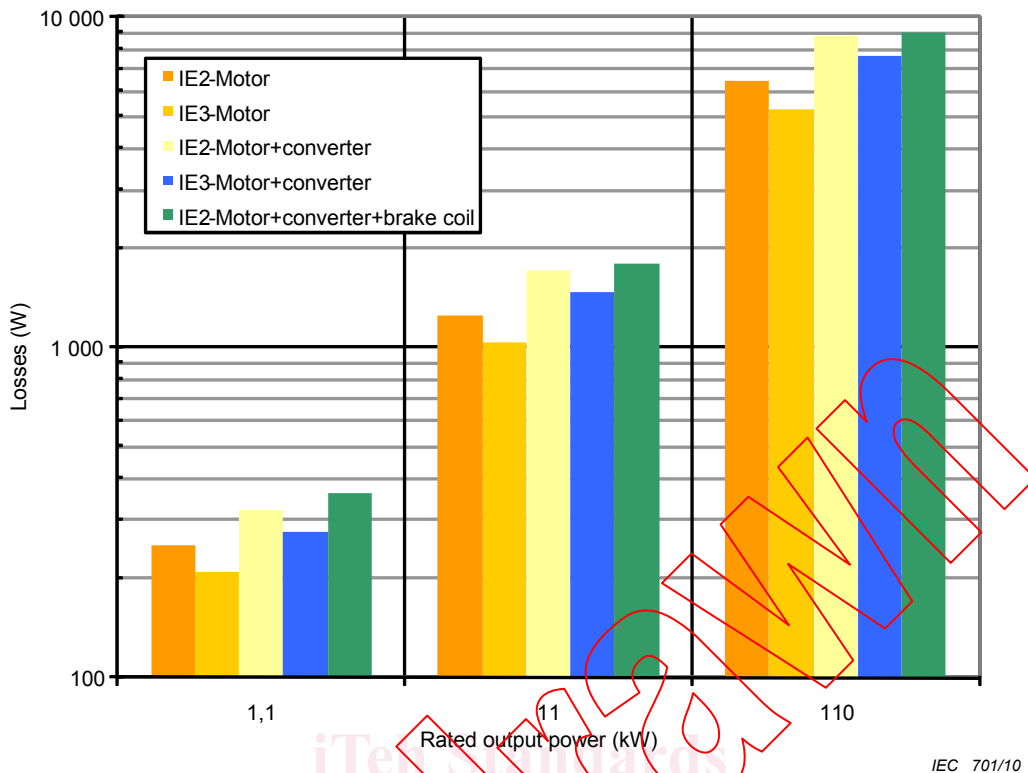


Figure 2 – Typical losses of energy-efficient motors, converters and electro-mechanical brakes

Figure 2 gives an overview of typical losses of energy-efficient motors and typical losses for the power drive system including motors with voltage-source frequency converters with and without brake coils of electro-mechanical motor brakes.

In intermittent duty applications, energy efficient motors are not very effective and may even use more energy due to their increased inertia and start-up currents. For these applications, the energy consumption during the starting phase can be reduced by ramping with a frequency converter. Intermediate energy storage may be beneficial when the operating cycle includes frequent regenerative braking phases (for example hoist drives, lifts, cranes etc.).

5 Efficiency

5.1 General

Motor efficiency is a measure of the effectiveness with which electrical energy is converted to mechanical energy, and is expressed as the ratio of power output to power input:

$$\text{Efficiency} = \frac{\text{OutputPower}}{\text{InputPower}} = \frac{\text{OutputPower}}{\text{OutputPower} + \text{losses}}$$

Motor efficiencies are usually given for rated load, although approximations for 3/4 load and 1/2 load may also be provided.

The efficiency of a motor is primarily a function of load, rated power, and speed, as indicated below.

- a) A change in efficiency as a function of load is an inherent characteristic of motors. Operation of the motor at loads substantially different from rated load may result in a change in motor efficiency (see Figure 3).
- b) Generally, the full-load efficiency of motors increases with physical size and rated output of motors.
- c) For the same power rating, motors with higher speeds generally, but not always, have a higher efficiency at rated load than motors with lower rated speeds. This does not imply, however, that all apparatus should be driven by high-speed motors. Where speed-changing mechanisms, such as pulleys or gears, are required to obtain the necessary lower speed, the additional power losses could reduce the efficiency of the system to a value lower than that provided by a direct drive lower speed motor.

A definite relationship exists between the rated speed (min^{-1}) and the efficiency of a cage-induction motor. That is, the lower the rated speed, the lower is the efficiency, for slip is a measure of the losses in the rotor winding (slip of an induction motor is the difference between synchronous speed and operating speed). Slip, expressed in %, is the difference in speeds divided by the synchronous speed and multiplied by 100. Therefore, Design N cage-induction motors having a slip at full-load of less than 5 % are more efficient than motors having a higher slip and should be used when permitted by the application.

For loads such as pumps, fans and air compressors, it may be possible to make a significant saving in energy by utilizing a multispeed motor or by using a variable speed drive (VSD). However, it should be noted that the efficiency of a multispeed motor at each operating speed is somewhat lower than that of a single-speed motor having a comparable rating. Single-winding (for example Dahlander winding), multispeed motors are generally more efficient than two-winding, multispeed motors.

Motors which operate continuously or for long periods of time provide a significant opportunity for reducing energy consumption. Examples of such applications are processing machinery, air moving equipment, pumps, and many types of industrial equipment.

While many motors are operated continuously, some motors are used for very short periods of time and for a very low total number of hours per year. Examples of such applications are valve motors, dam gate operators, industrial door openers, fire pumps and sewage pumps. In these instances, a change in motor efficiency would not substantially change the total energy cost since very little total energy is involved and may decrease the required performance.

A modest increase of a few percentage points in motor efficiency can represent a rather significant decrease in percentage of motor losses. For example, for the same output, an increase in efficiency from 75 % to 78,9 %, from 85 % to 87,6 %, or from 90 % to 91,8 % represents a 20 % decrease in losses in each case.

As efficiency typically increases with the size of the motor, high-voltage machines with output powers exceeding 1 MW usually have an efficiency above 95 %.

NOTE While an electric motor's output power increases with the square of its diameter the permissible heat dissipation increases almost linearly. Therefore, a higher efficiency is an inevitable precondition for the design of larger motors.

5.2 Motor losses

An electric motor converts electrical energy into mechanical energy and in so doing incurs losses which are generally described as follows:

- a) Electrical (stator and rotor) losses (vary with load) – Current flowing through stator and rotor windings produces losses which are proportional to the current squared times the winding resistance (I^2R). Rotor loss increases with slip.
- b) Iron (core) loss (essentially independent of load) – This loss is produced mainly in the laminated core of the stator and, to a lesser degree, in the rotor. The magnetic field,

essential to the production of torque in the motor, causes hysteresis and eddy current losses.

- c) Mechanical (friction and windage) losses (essentially independent of load) – Mechanical losses occur in the bearings, fans, and seals of the motor. These losses are generally small in IP2X, IP4X and IP5X slow-speed motors, but may be appreciable in large, high-speed or totally-enclosed IP6X motors.
- d) Additional load losses (stray load losses) – The additional fundamental and high frequency losses in the iron; conductor and circulating current losses in the stator winding; and harmonic losses in the rotor conductors under load. These losses are assumed to be proportional to the torque squared.

Listed below (Table 1) are the motor loss components, with the typical % of the total motor losses they represent, and the design and construction factors which influence their magnitude.

Table 1 – Loss distribution in three-phase, 4-pole, cage-induction electric motors

	Typical % of losses 4-pole motors	Factors affecting these losses
Stator loss	30 to 50	Stator conductor size and material.
Rotor loss	20 to 25	Rotor conductor size and material.
Core loss	20 to 25	Type and quantity of magnetic material.
Additional-load loss	5 to 15	Primarily manufacturing and design methods.
Friction and windage	5 to 10	Selection/design of fan and bearings.

In general, by increasing the active material in the motor, i.e., the type and volume of conductors and magnetic materials, losses can be reduced.

5.3 Additional motor-losses when operated on a frequency converter

Harmonics of voltage and current in a cage-induction motor supplied from a frequency-converter cause additional iron and I^2R winding losses in the stator and the rotor. The total value of these additional losses is essentially independent of load. These additional losses decrease with increasing switching frequency in the converter.

In adverse circumstances the additional losses in the motor caused by the frequency converter can increase the total motor losses up to 15 % to 20 % more than when operating on a sinusoidal power supply.

For details see IEC 60034-17 and IEC 60034-25.

5.4 Motors for higher efficiency classes

It is expected that advanced technologies will enable manufacturers to design motors for higher efficiencies than IE3 with mechanical dimensions (flanges, shaft heights etc.) compatible to existing motors of lower efficiency classes (for example EN 50347, NEMA MG1 and other local standards). These motors usually require power electronics (frequency converters) to operate.

Losses in the rotor are almost eliminated when using synchronous motors without a field winding.

In Annex A, this technical specification proposes a super-premium efficiency-class IE4 which is specifically targeted at such motors (although the efficiency class IE4 as such is not limited to specific motors).