
Aerospace series - Pipe coupling 8°30' in titanium alloy - Unions, reducer

Aerospace series - Pipe coupling 8°30' in titanium alloy - Unions, straight, reducer

Luft- und Raumfahrt - Rohrverschraubung 8°30' aus Titanlegierung - Gerade Reduzierschraubungen

Série aérospatiale - Systeme de raccordement 8°30' en alliagede titane - Raccords droits pour réduction

STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: EN 3245:2001

SIST EN 3245:2004
<https://standards.iteh.ai/catalog/standards/sist/91e8e2ea-cc5e-4236-bfe5-00c8fa47c061/sist-en-3245-2004>

ICS:

49.080

Številni sistemi za povezavo cevi
 za tekočine in pline

Aerospace fluid systems and components

SIST EN 3245:2004

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3245:2004

<https://standards.iteh.ai/catalog/standards/sist/91e8c2ea-cc5e-4236-bfe5-00c8fa47c061/sist-en-3245-2004>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3245

October 2001

ICS 49.080

English version

**Aerospace series - Pipe coupling 8°30' in titanium alloy -
Unions, reducer**

Série aérospatiale - Système de raccordement 8°30' en
alliage de titane - Raccords droits pour réduction

Luft- und Raumfahrt - Rohrverschraubung 8°30' aus
Titanlegierung - Gerade Reduzierschraubungen

This European Standard was approved by CEN on 6 January 2001.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/91e8c2ea-cc5e-4236-bfe5-00c8fa47c061/sist-en-3245-2004>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2002, and conflicting national standards shall be withdrawn at the latest by April 2002.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/91e8c2ea-cc5e-4236-bfe5-00c8fa47c061/sist-en-3245-2004>

1 Scope

This standard specifies the characteristics of straight unions reducer, for pipe couplings 8°30', in titanium alloy, for aerospace applications.

Nominal pressure: up 28 000 kPa

Temperature range: – 55 °C to 135 °C

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies (including amendments).

ISO 5855-3	Aerospace – MJ threads – Part 3: Limit dimensions for fittings for fluid systems
EN 2424	Aerospace series – Marking of aerospace products
EN 2491	Aerospace series – Molybdenum disulphide dry lubricants – Coating methods
EN 3274	Aerospace series – Pipe coupling 8°30' – Thread end – Geometric configuration
EN 3275	Aerospace series – Pipe coupling 8°30' up to 28 000 kPa – Dynamic beam seal – Metric series – Technical specification
EN 3311	Aerospace series – Titanium alloy TI-P64001 – Annealed – Bar for machining – $D \leq 150 \text{ mm}^1$
EN 3314	Aerospace series – Titanium alloy TI-P64001 – Solution treated and aged – Bar for machining – $D \leq 75 \text{ mm}^1$

¹⁾ Published as AECMA Prestandard at the date of publication of this standard

3 Required characteristics

3.1 Configuration – Dimensions – Mass

According to figure 1 and table 1. The values apply before lubricating.

Dimensions not specified are at the manufacturer's option provided that the qualification and acceptance requirements of EN 3275, type II are met.

3.2 Surface roughness

According to figure 1, unless otherwise specified in the design documentation

3.3 Materials

According to EN 3311 or EN 3314

3.4 Surface treatment

Lubrication: according to EN 2491, on threads and sealing faces.


Prior to application of the lubricant the surface shall be abrasive blasted using non-metallic grit.

Film thickness: 0,005 mm to 0,013 mm

iTech STANDARD PREVIEW
(standards.itech.ai)

SIST EN 3245:2004
<https://standards.itech.ai/catalog/standards/sist/91e8c2ea-cc5e-4236-bfe5-00c8f247c061/sist-en-3245-2004>

Dimensions in millimetres

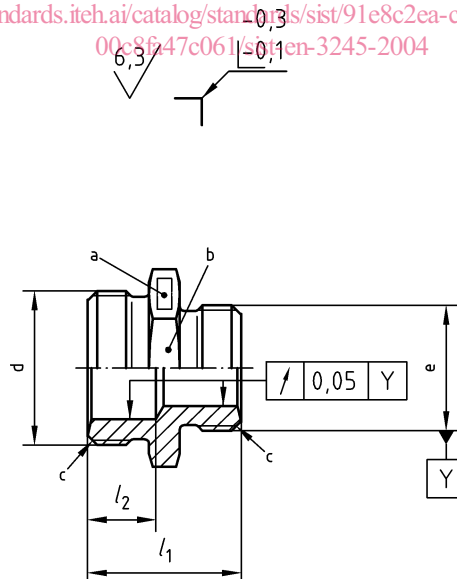

- a Area for marking
- b Across flats s
- c According to EN 3274, form B
- d Thread 1
- e Thread 2

Figure 1

Table 1

Dimensions in millimetres

Code ^a	Thread 1 ^b		Thread 2 ^b		l_1	l_2	s	Mass
	4g6g	Code ^c	4g6g	Code ^d	$\pm 0,3$	$\pm 0,5$	h13	g/piece max.
0605	MJ12×1,25	06	MJ10×1	05	21	10	13	7,21
0806	MJ14×1,5	08	MJ12×1,25	06	24,5	11	16	11,24
1008	MJ16×1,5	10	MJ14×1,5	08	27	12	17	14,71
1210	MJ18×1,5	12	MJ16×1,5	10	27	12	19	17,48
1612	MJ22×1,5	16	MJ18×1,5	12	27	12	24	25,30
2016	MJ27×1,5	20	MJ22×1,5	16	27	12	30	36,95
2520	MJ33×1,5	25	MJ27×1,5	20	27	12	34	48,87
3225	MJ39×1,5	32	MJ33×1,5	25	28	13	41	69,64

^a Corresponds to the pipe nominal outside diameter for thread 1 and thread 2

^b According to ISO 5855-3

^c Corresponds to the pipe nominal outside diameter

^d Corresponds to the pipe reduced outside diameter

4 Designation

EXAMPLE:

Description block

Identity block

UNION, REDUCER

EN3245-0806

Number of this standard

Code (see table 1)

NOTE: If necessary, the code I9005 shall be placed between the description block and the identity block.

5 Marking

According to EN 2424, style A and figure 1

6 Technical specification

According to EN 3275, type II