
Aerospace series - Pipe coupling 8°30' in titanium alloy - Thrust wire nuts

Aerospace series - Pipe coupling 8°30' in titanium alloy - Thrust wire nuts

Luft- und Raumfahrt - Rohrverschraubung 8°30' aus Titanlegierung - Muttern mit Schubdraht

Série aérospatiale - Systeme de raccordement 8°30' en alliage de titane - Écrous a jonc

(standards.iteh.ai)**Ta slovenski standard je istoveten z: EN 3264:2001**

SIST EN 3264:2004
<https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004>

ICS:

49.030.30 Matice Nuts

SIST EN 3264:2004 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3264:2004

<https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3264

October 2001

ICS 49.030.30

English version

Aerospace series - Pipe coupling 8°30' in titanium alloy - Thrust wire nut

Série aérospatiale - Système de raccordement 8°30' en alliage de titane - Ecrou à jonc

Luft- und Raumfahrt - Rohrverschraubung 8°30' aus Titanlegierung - Mutter mit Schubdraht

This European Standard was approved by CEN on 6 January 2001.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 3264:2004](https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004)

<https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2002, and conflicting national standards shall be withdrawn at the latest by April 2002.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004>

1 Scope

This standard specifies the characteristics of thrust wire nuts for pipe couplings 8°30', in titanium alloy, for aerospace applications.

Nominal pressure: up to 28 000 kPa

Temperature range: – 55 °C to 135 °C

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

ISO 5855-3	Aerospace – MJ threads – Part 3: Limit dimensions for fittings for fluid systems
ISO 8788	Aerospace – Nuts, metric – Tolerances of form and position
EN 2424	Aerospace series – Marking of aerospace products
EN 2491	Aerospace series – Molybdenum disulphide dry lubricants – Coating methods
EN 3275	Aerospace series – Pipe coupling 8°30' up to 28 000 kPa – Dynamic beam seal – Metric series – Technical specification
EN 3311	Aerospace series – Titanium alloy TI-P64001 – Annealed – Bar for machining – $D \leq 150 \text{ mm}^1$)
EN 3314	Aerospace series – Titanium alloy TI-P64001 – Solution treated and aged – Bar for machining – $D \leq 75 \text{ mm}^1$)
EN 4032	Aerospace series – Pipe coupling 8° 30' in titanium alloy – Thrust wires

1) Published as AECMA Prestandard at the date of publication of this standard

EN 3264:2001 (E)

3 Required characteristics

3.1 Configuration – Dimensions – Mass

According to figure 1 and table 1. The values apply before lubricating.

3.2 Surface roughness

According to figure 1

3.3 Material


According to EN 3311 or EN 3314

3.4 Surface treatment

Lubrication: according to EN 2491, on the bottom of the groove only.

Prior to application of the lubricant the surface shall be abrasive blasted using non-metallic grit.

Film thickness: 0,005 mm to 0,013 mm

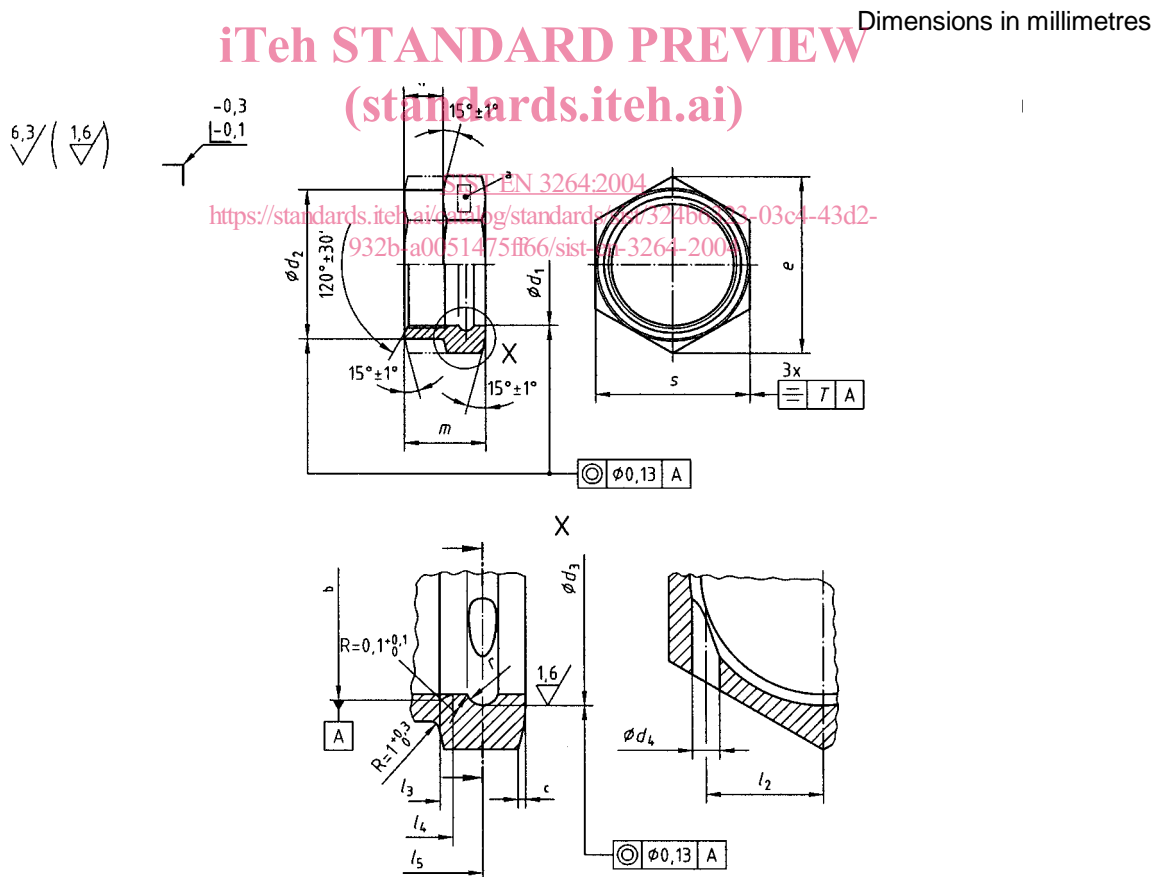

- a Area for marking
- b Thread
- c 0,3 to 0,5 applicable to both faces

Figure 1

Table 1

Dimensions in millimetres

Code ^a	Thread ^b 4H5H	d_1 $\pm 0,1$	d_2 0 -0,2	d_3 +0,1 0	d_4 ^c +0,1 0	e min.	l_1 $\pm 0,4$	l_2 $\pm 0,1$	l_3 ^d	l_4 max.	l_5 $\pm 0,1$	m h11	r +0,1 0	s h13	T ^e	Mass g/piece max.
05	MJ10 × 1	9,1	—	11,0	2,2	15,51	—	4,2	7,2	8,4	10,0	13,0	1,3	14	0,36	5,52
06	MJ12 × 1,25	10,8	—	12,6		17,77	—	5,2	8,0	9,2	11,0	14,0		16	0,43	7,36
08	MJ14 × 1,5	12,6	17,0	14,6		20,03	11,0	6,2	8,5	11,0	13,0	16,0		18		7,59
10	MJ16 × 1,5	14,6	19,0	16,6		23,36	7,2	16,5			21	9,00				
12	MJ18 × 1,5	16,6	21,0	19,2	2,7	24,49	10,5	8,2	9,5	12,0	14,0	17,5	1,6	22	10,64	
14	MJ20 × 1,5	18,6	23,0	21,2		26,75	9,2	18,0			24	11,56				
16	MJ22 × 1,5	20,6	26,0	23,2		30,14	10,2	27			17,50					
18	MJ24 × 1,5	22,6	28,0	25,2		33,53	11,2	30			23,66					
20	MJ27 × 1,5	25,6	31,0	28,2	3,2	35,72	10,0	12,5	14,5	19,0	19,0	1,9	32	23,23		
22	MJ30 × 1,5	28,6	35,0	31,2		39,98		13,7					36	27,72		
25	MJ33 × 1,5	31,6	38,0	34,2		45,63		15,5					41	36,63		
28	MJ36 × 1,5	34,6	41,0	37,2		51,28		9,5					17,2	46	42,00	
32	MJ39 × 1,5	37,6	45,0	40,2	55,80	18,6	20,0	50	51,45							

^a Corresponds to the pipe nominal outside diameter

^b According to ISO 5855-3

^c Corresponding wire diameter according to EN 4032

^d Minimum usable thread length

^e According to ISO 8788

<https://standards.iteh.ai/catalog/standards/sist/324b6323-03c4-43d2-932b-a0051475ff66/sist-en-3264-2004>

4 Designation

EXAMPLE:

Description block

Identity block

THRUST WIRE NUT

EN3264-05

Number of this standard

Code (see table 1)

NOTE: If necessary, the code I9005 shall be placed between the description block and the identity block.

5 Marking

According to EN 2424, style A and figure 1

6 Technical specification

According to EN 3275, type II