

**SLOVENSKI STANDARD  
SIST EN 3286:2001****01-januar-2001**

---

**Aerospace series - Bearings, airframe rolling - Rigid single row ball bearings in corrosion resisting steel - Diameter series 0 and 2 - Normal clearance category - Dimensions and loads**

Aerospace series - Bearings, airframe rolling - Rigid single row ball bearings in corrosion resisting steel - Diameter series 0 and 2 - Normal clearance category - Dimensions and loads

Luft- und Raumfahrt - Flugwerkklager - Einreihige Rillenkugellager aus korrosionsbeständigem Stahl - Durchmesserreihen 0 und 2 - Normale Lagerluft - Maße und Belastungen

Série aérospatiale - Roulements pour structures d'aéronefs - Roulements en acier, résistant a la corrosion, rigides, a une rangée de billes - Séries de diametres 0 et 2 - Catégorie a jeux normaux - Dimensions et charges

**Ta slovenski standard je istoveten z: EN 3286:1994**

---

**ICS:**

49.035	Sestavni deli za letalsko in vesoljsko gradnjo	Components for aerospace construction
--------	--	---------------------------------------

**SIST EN 3286:2001****en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3286:2001

<https://standards.iteh.ai/catalog/standards/sist/1023db06-17ea-42d4-a223-f0a3906847d4/sist-en-3286-2001>

EUROPEAN STANDARD

EN 3286

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 1994

UDC 621.822.74.004.1:669.14:018.89

Descriptors: Aircraft industry, airframe bearings, ball bearings, corrosion resisting steel, dimensions, static loads

English version

**Aerospace series - Bearings, airframe rolling -  
Rigid single row ball bearings in corrosion resisting  
steel - Diameter series 0 and 2 - Normal clearance  
category - Dimensions and loads**

Série aérospatiale - Roulements pour structures  
d'aéronefs - Roulements en acier, résistant à  
la corrosion, rigides, à une rangée de billes  
- Séries de diamètres 0 et 2 - Catégorie à jeux  
normaux - Dimensions et charges

Luft- und Raumfahrt - Flugwerk-lager -  
Einreihige Rillenkugellager aus  
korrosionsbeständigem Stahl - Durchmesserreihen  
0 und 2 - Normale Lagerluft - Maße und  
Belastungen

SIST EN 3286:2001

<https://standards.iteh.ai/catalog/standards/sist/1023db06-17ea-42d4-a223-f0a3906847d4/sist-en-3286-2001>

This European Standard was approved by CEN on 1994-06-07. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

## CEN

European Committee for Standardization  
Comité Européen de Normalisation  
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

**Foreword**

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has successively received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This standard was submitted for Formal Vote, and the result was positive.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1994, and conflicting national standards shall be withdrawn at the latest by December 1994.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

SIST:EN 3286:2001  
<https://standards.iteh.ai/catalog/standards/sist/1973-d86c-17ea-42d4-a223-1994/en-3286-1994>  
This document is a preview of the standard.  
For more information, please contact the publisher.  
.....T010  
PUBLIC INFORMATION

## 1 Scope

This standard specifies the characteristics of rigid single row ball bearings in corrosion resisting steel of diameter series 0 and 2 <sup>1)</sup> designed to withstand only slow rotations and oscillations under load.

They are intended for use between fixed and moving parts of the aircraft structure and their control mechanisms.

The airframe rolling bearings defined in this standard are used from - 54 °C to + 150 °C.

However, being lubricated with the following greases :

- very high pressure grease, ester type (code A), operational range - 73 °C to + 121 °C or
- very high pressure grease, synthetic hydrocarbons, general purpose (code B), operational range - 54 °C to + 177 °C (see EN 3280),

their field of application when lubricated with code A grease is limited to + 121 °C.

## 2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 15	Rolling bearings - Radial bearings - Boundary dimensions - General plan
ISO 1132	Rolling bearings - Tolerances - Definitions
EN 2030	Steel FE-PM43 - Hardened and tempered - Bars $D \leq 150$ mm - Aerospace series 2)
EN 2226	Steel FE-PM43 - Hardened and tempered - Hand and die forgings $D_e \leq 150$ mm - Aerospace series 2)
EN 3280	Aerospace series - Bearings, airframe rolling, rigid or self-aligning - Technical specification

## 3 Definition

For the purposes of this standard, the following definition applies :

**Bearing** : full complement of balls (without cage), with filling slot.

<https://standards.iteh.ai/catalog/standards/sist/1023db06-17ea-42d4-a223-f0a3906847d4/sist-en-3286-2001>

## 4 Symbols

The definitions of tolerances and clearances are given in ISO 1132.

$\Delta_{dmp}$	= single plane mean bore diameter deviation
$\Delta_{Dmp}$	= single plane mean outside diameter deviation
$\Delta_{ds}$	= deviation of a single bore diameter
$\Delta_{Ds}$	= deviation of a single outside diameter
$G_a$	= axial internal clearance
$G_r$	= radial internal clearance
$S_{ia}$	= assembled bearing inner ring face runout with raceway
$S_{ea}$	= assembled bearing outer ring face runout with raceway
$K_{ia}$	= radial runout of assembled bearing inner ring
$K_{ea}$	= radial runout of assembled bearing outer ring
$F_a \text{ max.}$	= permissible static axial load
$C_s$	= permissible static radial load.

1) See ISO 15

2) Published as AECMA Standard at the date of publication of this standard

## 5 Required characteristics

### 5.1 Dimensions - Tolerances - Clearances - Loads - Mass

Configuration : see figure 1 ; the bearings are fitted with either seals or shields.  
Values : see table 1.

### 5.2 Surface roughness

Raceways and rolling elements :  $R_a = 0,2 \mu\text{m}$

Bore, side faces and cylindrical outer surface :  $R_a = 0,8 \mu\text{m}$ .

### 5.3 Materials


Inner ring : EN 2030 or EN 2226,  $\geq 58$  HRC

Outer ring : EN 2030 or EN 2226,  $\geq 58$  HRC

Balls : EN 2030,  $\geq 58$  HRC

Shields : Corrosion resisting material

Seals : Polytetrafluoroethylene (PTFE) or polytetrafluoroethylene (PTFE) reinforced with fibreglass.

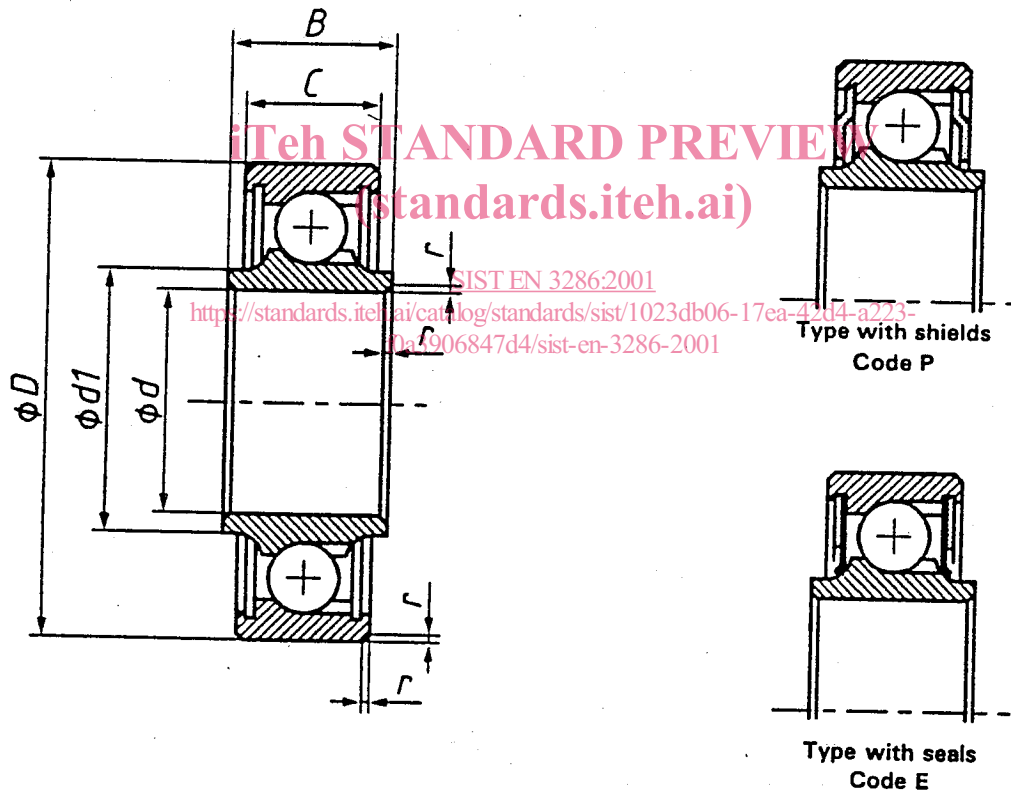

NOTE 1 : The installation of seals and shields is at the manufacturer's option.

NOTE 2 : The shields shall not extend beyond « C ».

Figure 1

Table 1

Dimensions in millimetres

d		B	C	D	d1	Tolerances $\mu\text{m}$				r	Mass kg/1000 parts $\approx$	
Code	Nominal	0 - 0,12	0 - 0,12		min.	$\Delta_{dmp}$	$\Delta_{Dmp}$	$\Delta_{ds}$	$\Delta_{Ds}$			
05	5	7	5	16	7,6	0 - 8	0 - 8	+ 2 - 10	+ 2 - 10	0,3 to 0,8	4	
06	6	8	6	19	8,6		0 - 9		+ 2 - 10		+ 2 - 11	9
08	8	9	7	22	10,6							0 - 9
10	10	10	8	26	12,6		0 - 9	+ 2 - 10	+ 2 - 11		21	
12	12			28	14,7						0 - 9	+ 2 - 10
15	15	11	9	32	17,7		0 - 9	+ 2 - 10	+ 2 - 11			
17	17	12	10	35	20,2						0 - 9	+ 2 - 10
20	20	14	12	42	23,5	0 - 9	+ 2 - 10	+ 2 - 11	72			
25	25			47	28,6				0 - 9		+ 2 - 10	+ 2 - 11
30	30	15	13	55	34,1	0 - 10	0 - 13	+ 3 - 13				


ITeH STANDARD PREVIEW  
(standards.iteh.ai)

d Code	Internal clearances $\mu\text{m}$		Runout tolerances max. $\mu\text{m}$				Starting torque <sup>1)</sup> in mN.m		Permissible static loads <sup>2)</sup> kN					
	Axial max. $G_a$	Radial $G_r$	Axial		Radial		Code P	Code E	Axial $F_a$ max.	Radial $C_s$				
			$S_{ia}$	$S_{ea}$	$K_{ia}$	$K_{ea}$								
05	100	2 to 13	40	40	25	40	2	4	3,1	6,8				
06							2,5	5	4,2	9,2				
08							3	6,5	5,4	11,8				
10							4	7,5	7,7	17				
12	120	3 to 18					40	40	25	40	5	8,5	8,9	19,5
15											6	10	10,6	23,3
17											8	12	12,2	26,9
20											10,5	15	18,7	41,2
25											13,5	18	21,2	46,6
30											150	5 to 20	19	25

1) Definition, see EN 3280.  
2) Axial and radial loads may be applied simultaneously.  
For ultimate static loads, see EN 3280.

## 6 Designation

EXAMPLE :

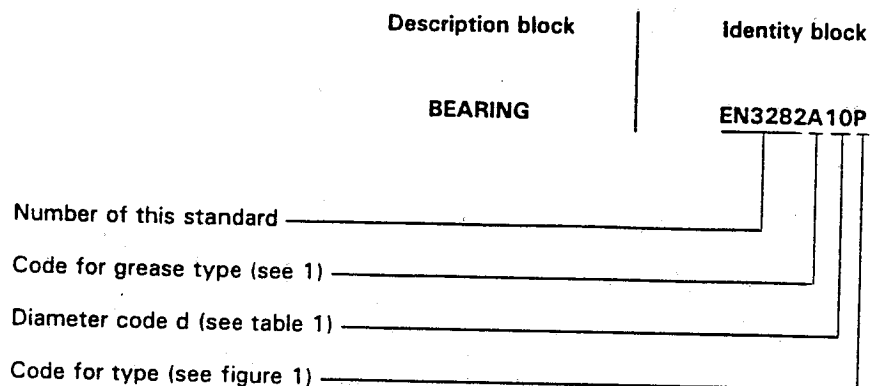

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

## 7 Marking

In addition to the manufacturer's own marking, each bearing shall be marked, on one side face only, using the identity block, see 6.

Marking position and method are at the manufacturer's option.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

## 8 Technical specification

See EN 3280.

SIST EN 3286:2001

<https://standards.iteh.ai/catalog/standards/sist/1023db06-17ea-42d4-a223-f0a3906847d4/sist-en-3286-2001>