

SLOVENSKI STANDARD

SIST EN 3287:2001

01-januar-2001

Aerospace series - Bearings, airframe rolling - Double row self-aligning ball bearings in steel - Diameter series 2 - Dimensions and loads

Aerospace series - Bearings, airframe rolling - Double row self-aligning ball bearings in steel - Diameter series 2 - Dimensions and loads

Luft- und Raumfahrt - Zweireihige Pendelkugellager aus Stahl - Durchmesserreihe 2 - Maße und Belastungen

Série aérospatiale - Roulements pour structures d'aéronefs - Roulements en acier, à rotule, sur deux rangées de billes - Série de diamètres 2 - Dimensions et charges

<https://standards.iteh.ai/catalog/standards/sist/de498321-13b9-4f17-8101-f60d3c74beed/sist-en-3287-2001>

Ta slovenski standard je istoveten z: EN 3287:1994

ICS:

49.035

Sestavni deli za letalsko in
vesoljsko gradnjo

Components for aerospace
construction

SIST EN 3287:2001

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3287:2001

<https://standards.iteh.ai/catalog/standards/sist/de498321-13b9-4f17-8101-f60d3c74beed/sist-en-3287-2001>

EUROPEAN STANDARD

EN 3287

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 1994

UDC 629.7.02:681.822.7.004.1:681.828:669.14

Descriptors: Aircraft industry, airframe bearings, self-aligning bearings, ball bearings, steel, dimensions, static loads

English version

**Aerospace series - Bearings, airframe rolling -
Double row self-aligning ball bearings in steel -
Diameter series 2 - Dimensions and loads**

Série aérospatiale - Roulements pour structures
d'aéronefs - Roulements en acier, à rotule, sur
deux rangées de billes - Série de diamètres 2
- Dimensions et charges

Luft- und Raumfahrt - Flugwerkklager -
Zweireihige Pendelkugellager aus Stahl -
Durchmesserreihe 2 - Maße und Belastungen

<https://standards.iteh.ai/catalog/standards/sist/de498321-13b9-4f17-8101-f60d3c74beed/sist-en-3287-2001>

This European Standard was approved by CEN on 1994-06-07. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has successively received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This standard was submitted for Formal Vote, and the result was positive.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1994, and conflicting national standards shall be withdrawn at the latest by December 1994.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

SIST EN 3287:2001

<https://standards.itech.ai/catalog/standards/sist/de498321-13b9-4f17-8101-100d187f0e01/sist-en-3287-2001>

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 01-10-2001 BY 1045
EXCEPT WHERE SHOWN
OTHERWISE

.....
EVISAJRSHI MOOTUM ON TEKVANG

1 Scope

This standard specifies the characteristics of double row self-aligning ball bearings in steel 1) of diameter series 2 2) designed to withstand only slow rotations, oscillations and/or swivelling under load.

They are intended for use between fixed and moving parts of the aircraft structure and their control mechanisms.

The airframe rolling bearings defined in this standard are used from $-54\text{ }^{\circ}\text{C}$ to $+150\text{ }^{\circ}\text{C}$.

However, being lubricated with the following greases :

- very high pressure grease, ester type (code A), operational range $-73\text{ }^{\circ}\text{C}$ to $+121\text{ }^{\circ}\text{C}$ or
- very high pressure grease, synthetic hydrocarbons, general purpose (code B), operational range $-54\text{ }^{\circ}\text{C}$ to $+177\text{ }^{\circ}\text{C}$ (see EN 3280),

their field of application when lubricated with code A grease is limited to $+121\text{ }^{\circ}\text{C}$.

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 15	Rolling bearings - Radial bearings - Boundary dimensions - General plan
ISO 1132	Rolling bearings - Tolerances - Definitions
EN 2031	Steel FE-PL31 - Hardened and tempered - Bars - Aerospace series 3)
EN 2221	Steel FE-PL31 - Hardened and tempered - Hollow bars $3,5\text{ mm} \leq a \leq 55\text{ mm}$ - Aerospace series 3)
EN 2222	Steel FE-PL31 - Hardened and tempered - Hand and die forgings - Aerospace series 3)
EN 3280	Aerospace series - Bearings, airframe rolling, rigid or self-aligning - Technical specification
EN 3289	Aerospace series - Bearings, airframe rolling - Double row self-aligning ball bearings in corrosion resisting steel - Diameter series 2 - Dimensions and loads

3 Definition

For the purposes of this standard, the following definition applies :

Bearing : full complement of balls (without cage).

4 Symbols

The definitions of tolerances and clearances are given in ISO 1132.

Δ_{dmp}	= single plane mean bore diameter deviation
Δ_{Dmp}	= single plane mean outside diameter deviation
Δ_{ds}	= deviation of a single bore diameter
Δ_{Ds}	= deviation of a single outside diameter
G_{a}	= axial internal clearance
G_{r}	= radial internal clearance
K_{ia}	= radial runout of assembled bearing inner ring
K_{ea}	= radial runout of assembled bearing outer ring
$F_{\text{a max.}}$	= permissible static axial load
C_{s}	= permissible static radial load
P_{or}	= static equivalent radial load
F_{a}	= bearing axial load, axial component of actual bearing load
F_{r}	= bearing radial load, radial component of actual bearing load.

1) For new design, use preferably bearings in corrosion resisting steel, see EN 3289.

2) See ISO 15.

3) Published as AECMA Standard at the date of publication of this standard.

5 Required characteristics

5.1 Dimensions - Tolerances - Clearances - Loads - Mass

Configuration : see figure 1 ; the bearings are fitted with either seals or shields.
Values : see table 1.

5.2 Surface roughness

Raceways and rolling elements : $R_a = 0,2 \mu\text{m}$

Bore, side faces and cylindrical outer surface : $R_a = 0,8 \mu\text{m}$.

5.3 Materials


Inner ring : EN 2031 or EN 2221 or EN 2222, 59 HRC to 64 HRC

Outer ring : EN 2031 or EN 2221 or EN 2222, 59 HRC to 64 HRC

Balls : EN 2031, 59 HRC to 64 HRC

Shields : Corrosion resisting material

Seals : Polytetrafluoroethylene (PTFE) or polytetrafluoroethylene (PTFE) reinforced with fibreglass.

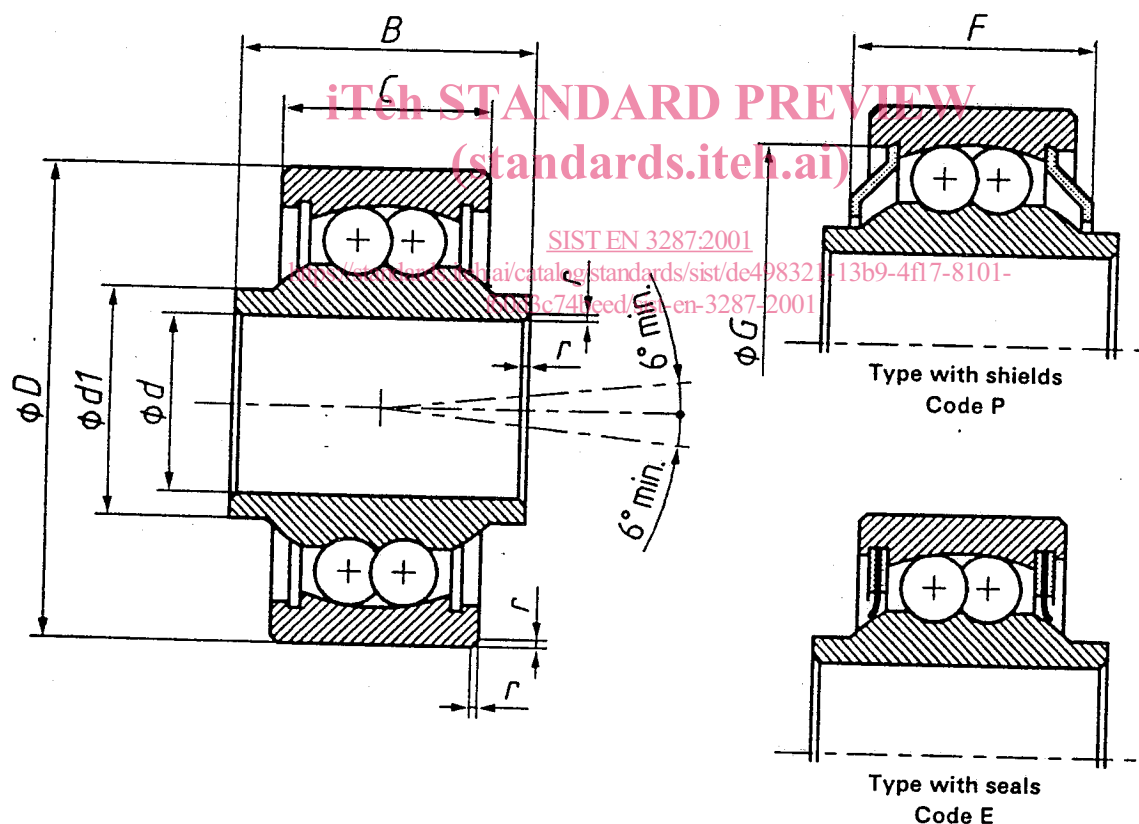

NOTE : The installation of seals and shields is at the manufacturer's option.

Figure 1

Table 1

Dimensions in millimetres

Dimensions in millimetres

d		B 0 - 0,12	C 0 - 0,12	D	d1 min.	F max. 1)	G max. 1)	Tolerances μm				r	Mass kg/1000 parts ≈		
Code	Nominal							Δ _{dmp}	Δ _{Dmp}	Δ _{ds}	Δ _{Ds}				
05	5	12	8	16	7,6	10	12	0 - 8	0 - 8	+ 2 - 10	+ 2 - 11	0,3 to 0,8	9		
06	6	14	10	19	8,6	12	14,4		0 - 9				+ 3 - 11	+ 3 - 14	14
08	8	15		24	11,1	13	19,8			0 - 11	+ 3 - 13				30
10	10	20	14	30	13,6	17	24		62						
12	12			32	15,4		26,5						75		
15	15			35	18,5		30							110	
17	17	22	16	40	21,2	19	34								170
20	20	24	18	47	23,6	20	39,7								

iTeh STANDARD PREVIEW
(standards.iteh.ai)

(standards.itech.ai)

d Code	Internal clearances µm						Runout tolerances		Starting torque 2)		Permissible static loads 3)	
	Axial max. G _a			Radial G _r			radial max. µm		in mN.m		kN	
	Special group Code R	Normal group Code N	Group 3 Code L	Special group Code R	Normal group Code N	Group 3 Code L	K _{ia}	K _{ea}	Code P	Code E	Axial F _a max.	Radial C _s
05	70	100		2 to 6	2 to 13	10 to 20	25	40	4	8	1,2	3,7
06				2 to 7					4,5	9	1,8	5,7
08	80	120				3 to 9			3 to 18	13 to 23	5,5	10
10				160							5 to 10	5 to 20
12		180				23			35	9		
15				12	18					5,9	18,8	
17		180		23	35	18			25	7,6	24,3	
20						180			23	35	23	35

1) Dimensions of the shields are at the manufacturer's option within the limits of F and G.


2) Definition, see EN 3280.

3) $F_r + 3,2 F_a = P_{or}$; P_{or} shall be $\leq C_s$.

For ultimate static loads, see EN 3280.

6 Designation

EXAMPLE :

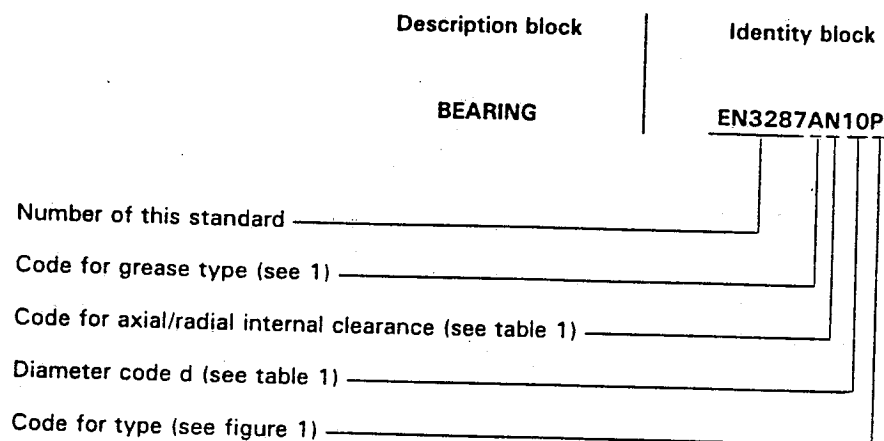

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

7 Marking

In addition to the manufacturer's own marking, each bearing shall be marked, on one side face only, using the identity block, see 6.

Marking position and method are at the manufacturer's option.

SIST EN 3287:2001

<https://standards.iteh.ai/catalog/standards/sist/de498321-13b9-4f17-8101-f60d3c74beed/sist-en-3287-2001>

8 Technical specification

See EN 3280.