

**SLOVENSKI STANDARD  
SIST EN 3289:2001****01-januar-2001**

---

**Aerospace series - Bearings, airframe rolling - Double row self-aligning ball bearings in corrosion resisting steel - Diameter series 2 - Dimensions and loads**

Aerospace series - Bearings, airframe rolling - Double row self-aligning ball bearings in corrosion resisting steel - Diameter series 2 - Dimensions and loads

Luft- und Raumfahrt - Flugwerklager - Zweireihige Pendelkugellager aus korrosionsbeständigem Stahl - Durchmesserreihe 2 - Maße und Belastungen

Série aérospatiale - Roulements pour structures d'aéronefs - Roulements en acier résistant a la corrosion, a rotule, sur deux rangées de billes - Série de diametres 2 - Dimensions et charges

<https://standards.iteh.ai/catalog/standards/sist/bec6ff10-218a-4355-8162-b485868474f6/sist-en-3289-2001>

**Ta slovenski standard je istoveten z: EN 3289:1994****ICS:**

49.035	Sestavni deli za letalsko in vesoljsko gradnjo	Components for aerospace construction
--------	--	---------------------------------------

**SIST EN 3289:2001****en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 3289:2001

<https://standards.iteh.ai/catalog/standards/sist/beccff0-218a-4355-8162-b485868474f6/sist-en-3289-2001>

EUROPEAN STANDARD

EN 3289

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 1994

UDC 629.7.02:681.822.7.004.1:681.828:669.14.018.89

Descriptors: Aircraft industry, airframe bearings, self-aligning bearings, ball bearings, corrosion resisting steel, dimensions, static loads

English version

**Aerospace series - Bearings, airframe rolling -  
Double row self-aligning ball bearings in corrosion  
resisting steel - Diameter series 2 - Dimensions  
and loads**

Série aérospatiale - Roulements pour structures  
d'aéronefs - Roulements en acier résistant à la  
corrosion, à rotule, sur deux rangées de billes  
- Série de diamètres 2 - Dimensions et charges

Luft- und Raumfahrt - Flugwerklager -  
Zweireihige Pendelkugellager aus  
korrosionsbeständigem Stahl - Durchmesserreihe  
2 - Maße und Belastungen

(standards.iteh.ai)

SIST EN 3289:2001

<https://standards.iteh.ai/catalog/standards/sist/beccff0-218a-4355-8162-b485868474f6/sist-en-3289-2001>

This European Standard was approved by CEN on 1994-06-07. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

**CEN**

European Committee for Standardization  
Comité Européen de Normalisation  
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

**Foreword**

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has successively received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This standard was submitted for Formal Vote, and the result was positive.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1994, and conflicting national standards shall be withdrawn at the latest by December 1994.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

ALI NE VOTI E ST AN D O U S E R
   
 T R E E M T O W N S O U T S I D E A S C U T E N T I O N A L
   
 https://standards.iteh.ai/catalog/standards/sist/3289-2001/en-3289-1994
   
 AN AL J S D U L L
   
 ..... T O I P
   
 P R O C E E D I N G S O F T H E C E N / C E N E L E C

## 1 Scope

This standard specifies the characteristics of double row self-aligning ball bearings in corrosion resisting steel of diameter series 2<sup>1)</sup> designed to withstand only slow rotations, oscillations and/or swivelling under load.

They are intended for use between fixed and moving parts of the aircraft structure and their control mechanisms.

The airframe rolling bearings defined in this standard are used from - 54 °C to + 150 °C.

However, being lubricated with the following greases :

- very high pressure grease, ester type (code A), operational range - 73 °C to + 121 °C or
- very high pressure grease, synthetic hydrocarbons, general purpose (code B), operational range - 54 °C to + 177 °C (see EN 3280),

their field of application when lubricated with code A grease is limited to + 121 °C.

## 2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 15	Rolling bearings - Radial bearings - Boundary dimensions - General plan
ISO 1132	Rolling bearings - Tolerances - Definitions
EN 2030	Steel FE-PM43 - Hardened and tempered - Bars $D \leq 150$ mm - Aerospace series 2)
EN 2226	Steel FE-PM43 - Hardened and tempered - Hand and die forgings $D_e \leq 150$ mm - Aerospace series 2)
EN 3280	Aerospace series - Bearings, airframe rolling, rigid or self-aligning - Technical specification

**iTeh STANDARD PREVIEW**

(standards.iteh.ai)

## 3 Definition

For the purposes of this standard, the following definition applies :

**Bearing** : full complement of balls (without cage).

[SIST EN 3289:2001](https://standards.iteh.ai/catalog/standards/sist/beccfff0-218a-4355-8162-b485868474f6/sist-en-3289-2001)

<https://standards.iteh.ai/catalog/standards/sist/beccfff0-218a-4355-8162-b485868474f6/sist-en-3289-2001>

## 4 Symbols

The definitions of tolerances and clearances are given in ISO 1132.

$\Delta_{dmp}$	= single plane mean bore diameter deviation
$\Delta_{Dmp}$	= single plane mean outside diameter deviation
$\Delta_{ds}$	= deviation of a single bore diameter
$\Delta_{Ds}$	= deviation of a single outside diameter
$G_a$	= axial internal clearance
$G_r$	= radial internal clearance
$K_{ia}$	= radial runout of assembled bearing inner ring
$K_{ea}$	= radial runout of assembled bearing outer ring
$F_a$ max.	= permissible static axial load
$C_s$	= permissible static radial load
$P_{or}$	= static equivalent radial load
$F_a$	= bearing axial load, axial component of actual bearing load
$F_r$	= bearing radial load, radial component of actual bearing load.

1) See ISO 15

2) Published as AECMA Standard at the date of publication of this standard

## 5 Required characteristics

### 5.1 Dimensions - Tolerances - Clearances - Loads - Mass

Configuration : see figure 1 ; the bearings are fitted with either seals or shields.

Values : see table 1.

### 5.2 Surface roughness

Raceways and rolling elements :  $R_a = 0,2 \mu\text{m}$

Bore, side faces and cylindrical outer surface :  $R_a = 0,8 \mu\text{m}$ .

### 5.3 Materials


Inner ring : EN 2030 or EN 2226,  $\geq 58 \text{ HRC}$

Outer ring : EN 2030 or EN 2221 or EN 2222,  $\geq 58 \text{ HRC}$

Balls : EN 2030,  $\geq 58 \text{ HRC}$

Shields : Corrosion resisting material

Seals : Polytetrafluoroethylene (PTFE) or polytetrafluoroethylene (PTFE) reinforced with fibreglass.

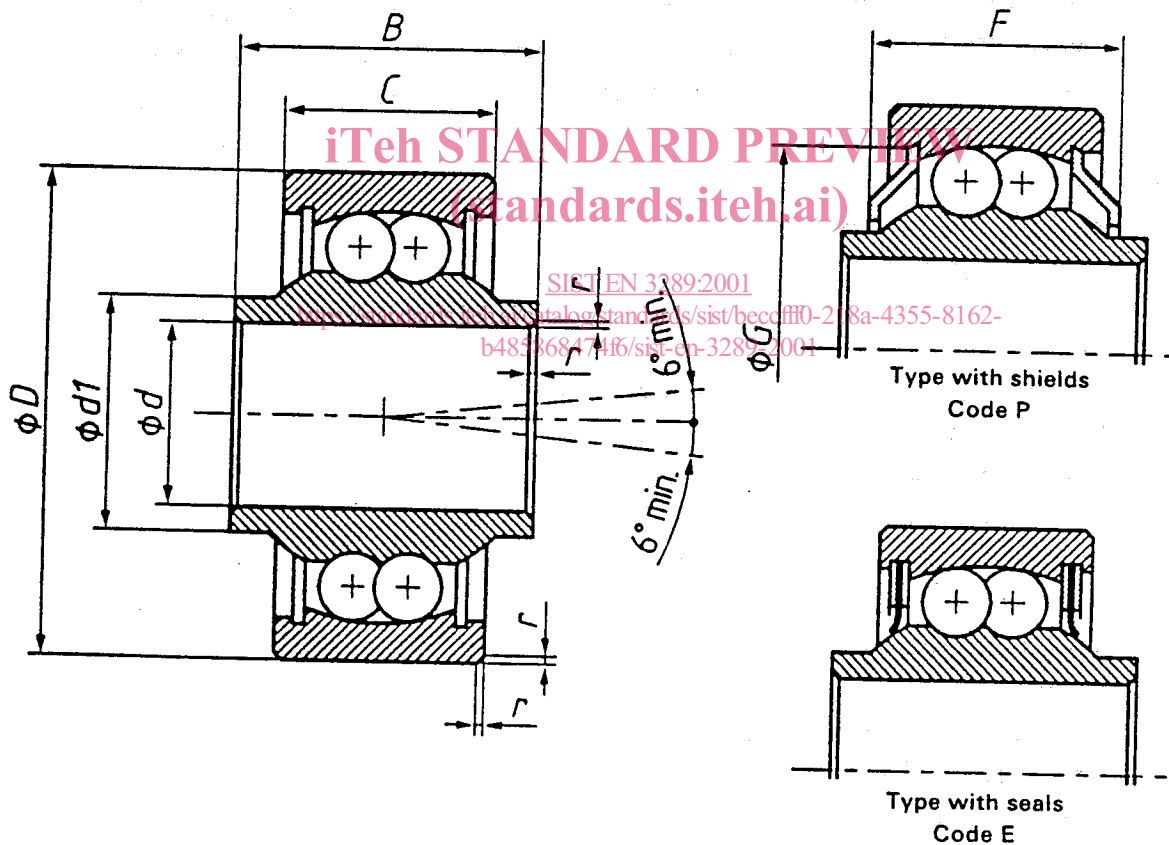

NOTE : The installation of seals and shields is at the manufacturer's option.

Figure 1

Table 1

Dimensions in millimetres

d		B	C	D	d1	F	G	Tolerances $\mu\text{m}$				r	Mass kg/1000 parts $\approx$
Code	Nominal	0 - 0,12	0 - 0,12		min.	max. 1)	max. 1)	$\Delta_{\text{dmp}}$	$\Delta_{\text{Dmp}}$	$\Delta_{\text{ds}}$	$\Delta_{\text{Ds}}$		
05	5	12	8	16	7,6	10	12	0 - 8	0 - 8	+ 2 - 10	0,3 to 0,8	9	
06	6	14	10	19	8,6	12	14,4		0 - 9			+ 2 - 10	+ 2 - 11
08	8	15		24	11,1	13	19,8			0 - 8			
10	10	20	14	30	13,6	17	24		0 - 11			+ 3 - 11	+ 3 - 14
12	12			32	15,4		26,5			62			
15	15			35	18,5		30			75			
17	17	22	16	40	21,2	19	34		0 - 11	+ 3 - 13			110
20	20	24	18	47	23,6	20	39,7						0 - 10

## iTeh STANDARD PREVIEW

d	Internal clearances $\mu\text{m}$						Runout tolerances radial max. $\mu\text{m}$		Starting torque 2) in mN.m		Permissible static loads 3) kN					
	Axial max. $G_a$			Radial $G_r$			$K_{ia}$	$K_{ea}$	Code P	Code E	Axial $F_a$ max.	Radial $C_s$				
	Special group Code R	Normal group Code N	Group 3 Code L	Special group Code R	Normal group Code N	Group 3 Code L										
05	70	100	2 to 6	2 to 13	10 to 20	25	40	4	8	1,2	3,7					
06												4,5	9	1,8	5,7	
08	80	120	2 to 7	3 to 9	3 to 18			13 to 23	5,5	10	2,8	9,1				
10													7,5	12	4,4	14,1
12													9	14	5	16,1
15	160	180	3 to 9	3 to 18	13 to 23			12	18	5,9	18,8					
17												18	25	7,6	24,3	
20	23	35	10,2	32,6												

1) Dimensions of the shields are at the manufacturer's option within the limits of F and G.


2) Definition, see EN 3280.

3)  $F_r + 3,2 F_a = P_{or}$ ;  $P_{or}$  shall be  $\leq C_s$ .

For ultimate static loads, see EN 3280.

## 6 Designation

EXAMPLE :

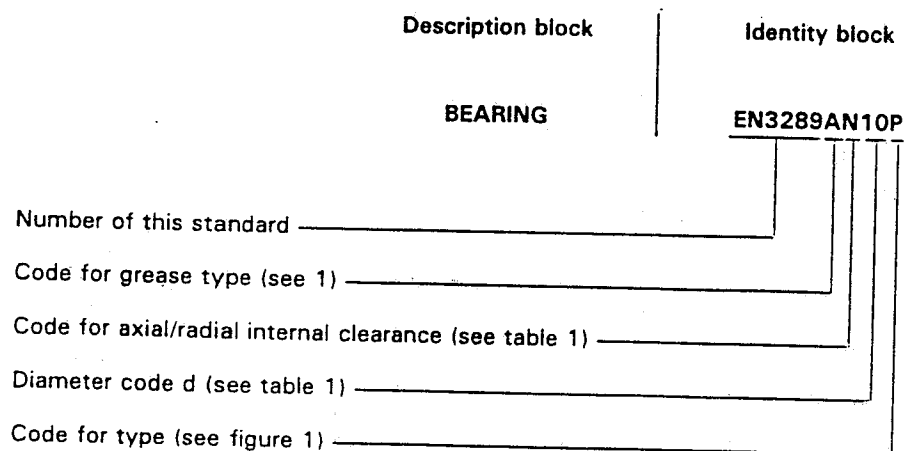

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

## 7 Marking

In addition to the manufacturer's own marking, each bearing shall be marked, on one side face only, using the identity block, see 6.

Marking position and method are at the manufacturer's option.

iteh STANDARD PREVIEW  
(standards.iteh.ai)

## 8 Technical specification

See EN 3280.

[SIST EN 3289:2001](https://standards.iteh.ai/catalog/standards/sist/beccff0-218a-4355-8162-b485868474f6/sist-en-3289-2001)

<https://standards.iteh.ai/catalog/standards/sist/beccff0-218a-4355-8162-b485868474f6/sist-en-3289-2001>