



SLOVENSKI STANDARD

SIST EN 2651:2001

01-januar-2001

Aerospace series - Screws, pan head, slotted, threaded to head, in brass, tin plated - Classification: 380 MPa (at ambient temperature)/80 °C

Aerospace series - Screws, pan head, slotted, threaded to head, in brass, tin plated - Classification: 380 MPa (at ambient temperature)/80 °C

Luft- und Raumfahrt - Flachkopfschrauben mit Schlitz, Gewinde annähernd bis Kopf, aus verzinntem Messing - Klasse: 380 MPa (bei Raumtemperatur)/80 °C

STANDARD PREVIEW

(standards.iteh.ai)

Série aérospatiale - Vis à tête cylindrique fendue, filetées jusqu'à proximité de la tête, en laiton, étamées - Classification: 380 MPa (à température ambiante)/80 °C

<https://standards.iteh.ai/catalog/standards/sist/1657c88f-c5ec-4444-9836-e9328429b7b0/sist-en-2651-2001>

Ta slovenski standard je istoveten z: EN 2651:1996

ICS:

49.030.20 Sorniki, vijaki, stebelni vijaki Bolts, screws, studs

SIST EN 2651:2001

en

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST EN 2651:2001

<https://standards.iteh.ai/catalog/standards/sist/1657c88f-c5cc-4444-9836-e9328429b7b0/sist-en-2651-2001>

EUROPEAN STANDARD

EN 2651

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 1996

ICS 49.040.20

Descriptors: aircraft industry, screw, cheese head screw, brass, specification, dimension, dimensional tolerance, surface treatment, designation, marking

English version

**Aerospace series - Screws, pan head, slotted,
threaded to head, in brass, tin plated -
Classification: 380 MPa (at ambient
temperature)/80 °C**

Série aérospatiale - Vis à tête cylindrique
fendue, filetées jusqu'à proximité de la tête,
en laiton, étamées - Classification: 380 MPa (à
température ambiante)/80 °C

iTeh STANDARD PREVIEW
[\(standards.iteh.ai\)](https://standards.iteh.ai/)

Luft- und Raumfahrt - Flachkopfschrauben mit
Schlitz, Gewinde annähernd bis Kopf, aus
verzinntem Messing - Klasse: 380 MPa (bei
Raumtemperatur)/80 °C

[SIST EN 2651:2001](#)

<https://standards.iteh.ai/catalog/standards/sist/1657c88f-c5ec-4444-9836-e9328429b7b0/sist-en-2651-2001>

This European Standard was approved by CEN on 1996-06-29. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Page 2
EN 2651:1996

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 1997, and conflicting national standards shall be withdrawn at the latest by February 1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 2651:2001

<https://standards.iteh.ai/catalog/standards/ist/1657c88f-c5ec-4444-9836-a01144444444>

TRÖGÖDÍKÍ TÖRTÉNETI KÖNYV SIST EN 2651:2001

Címkelés az eljárásról az EN 2651:2001

ELSZÁLLÍTHETŐ

FIZ - Rögzítve

FIZI

BUTIGA JAVÍTÁSI TÖRTÉNETI SIST EN 2651:2001

1 Scope

This standard specifies the characteristics of screws, pan head, slotted, threaded to head, in brass, tin plated.

Classification : 380 MPa ¹⁾ / 80 °C ²⁾

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 3353	Aerospace - Rolled threads for bolts - Lead and runout requirements
ISO 5855-2	Aerospace - MJ threads - Part 2 : Limit dimensions for bolts and nuts
ISO 7913	Aerospace - Bolts and screws, metric - Tolerances of form and position
EN 2000	Aerospace series - Quality assurance - EN aerospace products - Approval of the quality system of manufacturers iTeh STANDARD PREVIEW (standards.iteh.ai)
EN 2424	Aerospace series - Marking of aerospace products <small>SIST EN 2651:2001</small> https://standards.iteh.ai/catalog/standards/sist/1657c88f-c5ec-4444-9836-e9328429b7b0/sist-en-2651-2001

3 Required characteristics

3.1 Configuration - Dimensions - Masses

See figure 1 and table 1.

Dimensions and tolerances are expressed in millimetres and apply after surface treatment.

3.2 Tolerances of form and position

ISO 7913 and figure 1 and table 1

3.3 Materials

Brass : 63 % Cu, 37 % Zn ; $380 \text{ MPa} \leq R_m \leq 420 \text{ MPa}$

3.4 Surface treatment


Tin plating, 5 µm to 10 µm on all surfaces which can be contacted by a 20 mm diameter ball. On all other surfaces, a continuous deposit shall be present, but no value is specified.

1) Minimum tensile strength of the material at ambient temperature

2) Maximum temperature that the screw can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the surface treatment.

$\checkmark \quad [\checkmark]$ Values in micrometres apply prior to surface treatment.

Break sharp edges 0,1 to 0,4.

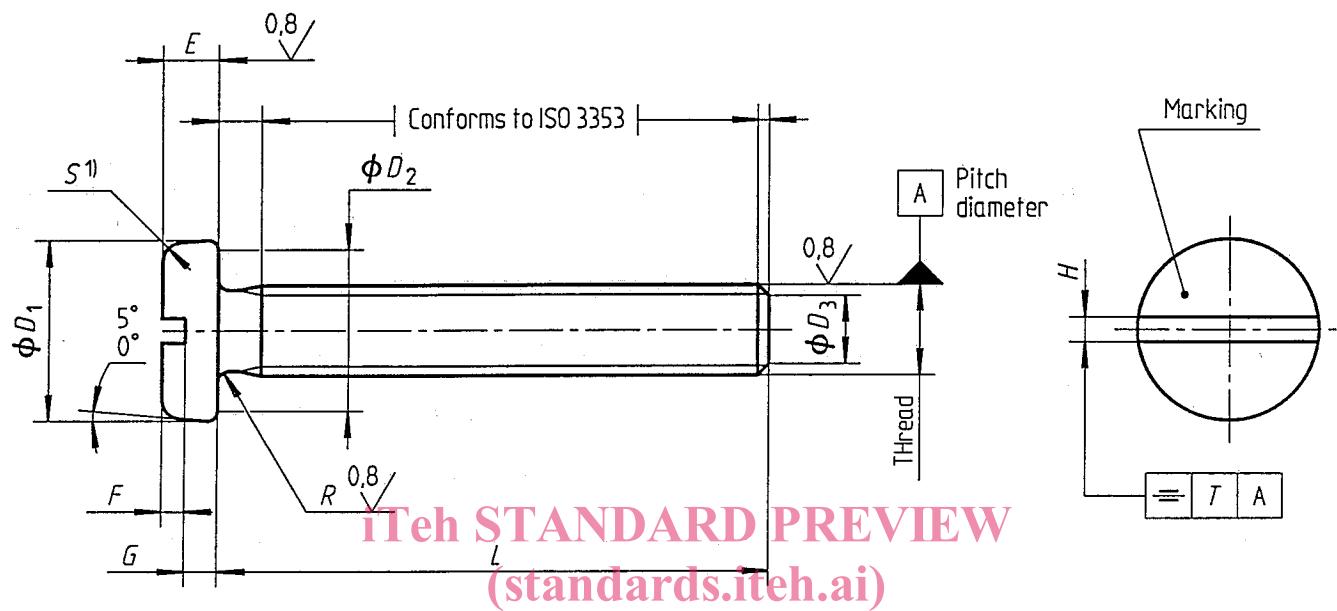

1) Shape optional

<https://standards.iteh.ai/catalog/standards/sist/1657c88f-c5ec-4444-9836-e9328429b7b0/sist-en-2651-2001>

Figure 1

Table 1

Diameter code	Thread ¹⁾	D_1 0 - 0,3	D_2 min.	D_3 nom.	Tol.	E nom.	Tol.	F min.	G min.	H nom.	Tol.
016	MJ1,6x0,35 - 4h6h	3,2	1,9	1,1	0 - 0,5	1	0 - 0,2	0,4	0,4	0,45	+ 0,15 0
020	MJ2x0,4 - 4h6h	4	2,7	1,4		1,2		0,5	0,5	0,55	
025	MJ2,5x0,45 - 4h6h	5	3,7	1,9		1,5		0,6	0,6	0,65	
030	MJ3x0,5 - 4h6h	6	4,7	2,3		1,8		0,7	0,7	0,85	
035	MJ3,5x0,6 - 4h6h	7	5,7	2,7		2,1		0,8	0,8	0,95	
040	MJ4x0,7 - 4h6h	8	6,7	3		2,4		1	1	1,05	
050	MJ5x0,8 - 4h6h	10	8,7	3,4		3		1,2	1,2	1,25	+ 0,25 0
060	MJ6x1 - 4h6h	12	10,7	4,2	$\pm 0,5$	3,6	0 $- 0,3$	1,5	1,5	1,65	

Diameter code	$L \pm 0,3$ ^{2) 3)}		R 0 - 0,2	S		T	Mass ⁴⁾	
	Code	nom.		max.	min.		5)	6)
016	004 to 022	4 to 22	0	0,7	0,2	0,08	0,107	0,025
020	004 to 028	4 to 28	$- 0,3$	0,8	0,2	0,1	0,188	0,04
025	004 to 036	4 to 36	$- 0,3$	1	0,3	0,12	0,343	0,064
030	004 to 042	4 to 42	$- 0,3$	1,2	0,3	0,15	0,561	0,094
035	006 to 050	6 to 50	$- 0,4$	1,4	0,4	0,17	0,974	0,128
040	006 to 056	6 to 56	$- 0,4$	1,6		0,236	1,38	0,166
050	008 to 070	8 to 70	$- 0,5$	2,0	0,5	0,25	2,79	0,265
060	010 to 084	10 to 84	0,7	2,4	0,6	0,3	4,86	0,378

1) In accordance with ISO 5855-2, rolled
 2) Increments :
 2 for $L \leq 100$
 4 for $L > 100$
 3) If greater lengths are required, they shall be chosen using the above increments. The length code corresponds to the length L , completed by one or two zeros to the left, where necessary, to obtain a three digit code.
 4) Approximate values (kg/1 000 pieces), calculated on the basis of 8,42 kg/dm³, given for information purposes only
 5) Value for head and first L
 6) Increase for each additional 2 mm of L .

4 Designation

EXAMPLE :

Description block	Identity block
SCREW	EN2651-020010
Number of this standard	
Diameter code (see table 1)	
Length code (see table 1)	

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

5 Marking

See table 2, plus MJ, and figure 1.

ITEH STANDARD PREVIEW (standards.iteh.ai)

Tableau 2

SIST EN 2651:2001	
Diameter code	EN 2424 F-c5ec-4444-9836-e9328429b780/sist-en-2651-020010 Style01
016 to 035	G
040 to 060	F (indented)

6 Approval of manufacturers

EN 2000

7 Packaging and labelling**7.1 Packaging**

It shall prevent any damage or corrosion occurring during handling and transportation.

Each package shall only contain screws of the same identity block, taken from the same inspection batch.

7.2 Labelling

Each package shall bear a label on which the identity block, quantity, production batch number and inspector's stamp have been recorded.