

**SLOVENSKI STANDARD  
SIST EN 2653:2001****01-januar-2001**

---

**Aerospace series - Screws, 100° countersunk normal head, threaded to head, in corrosion resisting steel, passivated - Classification: 600 MPa (at ambient temperature)/425 °C**

Aerospace series - Screws, 100° countersunk normal head, threaded to head, in corrosion resisting steel, passivated - Classification: 600 MPa (at ambient temperature)/425 °C

Luft- und Raumfahrt - 100° Senkschrauben mit Schlitz, Gewinde annähernd bis Kopf, aus korrosionsbeständigem Stahl, passiviert - Klasse: 600 MPa (bei Raumtemperatur)/425°C

**iTeh STANDARD PREVIEW**  
(standard.iteh.ai)

[SIST EN 2653:2001](https://standards.iteh.ai/catalog/standards/sist/e04a45a0-6b7a-4ab7-9b79-393d266b2015/en)

<https://standards.iteh.ai/catalog/standards/sist/e04a45a0-6b7a-4ab7-9b79-393d266b2015/en>

Série aérospatiale - Vis à tête fraisée, 100° normale fendue, filetées jusqu'à proximité de la tête, en acier résistant à la corrosion, passivées - Classification: 600 MPa (à température ambiante)/425°C

**Ta slovenski standard je istoveten z: EN 2653:1996**

---

**ICS:**

49.030.20 Sorniki, vijaki, stebelni vijaki Bolts, screws, studs

**SIST EN 2653:2001****en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 2653:2001

<https://standards.iteh.ai/catalog/standards/sist/e04a45a0-6b7a-4ab7-9b79-9d438e21b6e0/sist-en-2653-2001>

EUROPEAN STANDARD

EN 2653

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 1996

ICS 49.040.20

Descriptors: aircraft industry, screw, countersunk head screw, heat resistant steel, corrosion resistant steel, specification, dimension, dimensional tolerance, designation, marking

English version

**Aerospace series - Screws, 100° countersunk  
normal head, slotted, threaded to head, in  
corrosion resisting steel, passivated -  
Classification : 600 MPa (at ambient  
temperature)/425 °C**

Série aérospatiale - Vis à tête fraisée 100°  
normale fendue, filetées jusqu'à proximité de  
la tête, en acier résistant à la corrosion,  
passivées - Classification : 600 MPa (à  
température ambiante)/425 °C

Luft- und Raumfahrt - 100° Senkschrauben mit  
Schlitz, Gewinde annähernd bis Kopf, aus  
korrosionsbeständigem Stahl, passiviert -  
Klasse: 600 MPa (bei Raumtemperatur)/425 °C

<https://standards.iteh.ai/catalog/standards/sist/e04a45a0-6b7a-4ab7-9b79-9d438e21b6e0/sist-en-2653-2001>

This European Standard was approved by CEN on 1996-06-29. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

**CEN**

European Committee for Standardization  
Comité Européen de Normalisation  
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Page 2  
EN 2653:1996

**Foreword**

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 1997, and conflicting national standards shall be withdrawn at the latest by February 1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 2653:2001

<https://standards.iteh.ai/catalog/standards/sist/c84445a0-6b7a-4ab7-9b79-7703-b143821b607a/standard-en-2653-2001>

Standardizacija  
SIST EN 2653:2001  
Standardizacija  
SIST EN 2653:2001

INTERNATIONAL CENTER OF STANDARDIZATION  
..... 1010



## 1 Scope

This standard specifies the characteristics of screws, 100° countersunk normal head, slotted, threaded to head, in corrosion resisting steel, passivated.

Classification : 600 MPa <sup>1)</sup> / 425 °C <sup>2)</sup>

## 2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

ISO 3353	Aerospace - Rolled threads for bolts - Lead and runout requirements
ISO 5855-2	Aerospace - MJ threads - Part 2 : Limit dimensions for bolts and nuts
ISO 7913	Aerospace - Bolts and screws, metric - Tolerances of form and position
EN 2000	Aerospace series - Quality assurance - EN aerospace products - Approval of the quality system of manufacturers
EN 2424	Aerospace series - Marking of aerospace products
EN 2516	Aerospace series - Passivation of corrosion resistant steels and decontamination of nickel base alloys <sup>3)</sup>
TR 3775	Aerospace series - Bolts and pins - National materials <sup>4)</sup>

SIST EN 2653:2001

## 3 Required characteristics

<http://standards.iteh.ai/catalog/standards/sist/e04a45a0-6b7a-4ab7-9b79-9d438e21b6e0/sist-en-2653-2001>

### 3.1 Configuration - Dimensions - Masses

See figure 1 and table 1.

Dimensions and tolerances are expressed in millimetres and apply after surface treatment.

### 3.2 Tolerances of form and position

ISO 7913 and figure 1 and table 1

### 3.3 Materials

TR 3775 (corrosion resisting steel, strength class : 600 MPa)

### 3.4 Surface treatment

EN 2516

1) Minimum tensile strength of the material at ambient temperature

2) Maximum temperature that the screw can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the material.

3) Published as AECMA Standard at the date of publication of this standard

4) Published as AECMA Technical Report at the date of publication of this standard



Values in micrometres apply prior to surface treatment.

Break sharp edges 0,1 to 0,4.

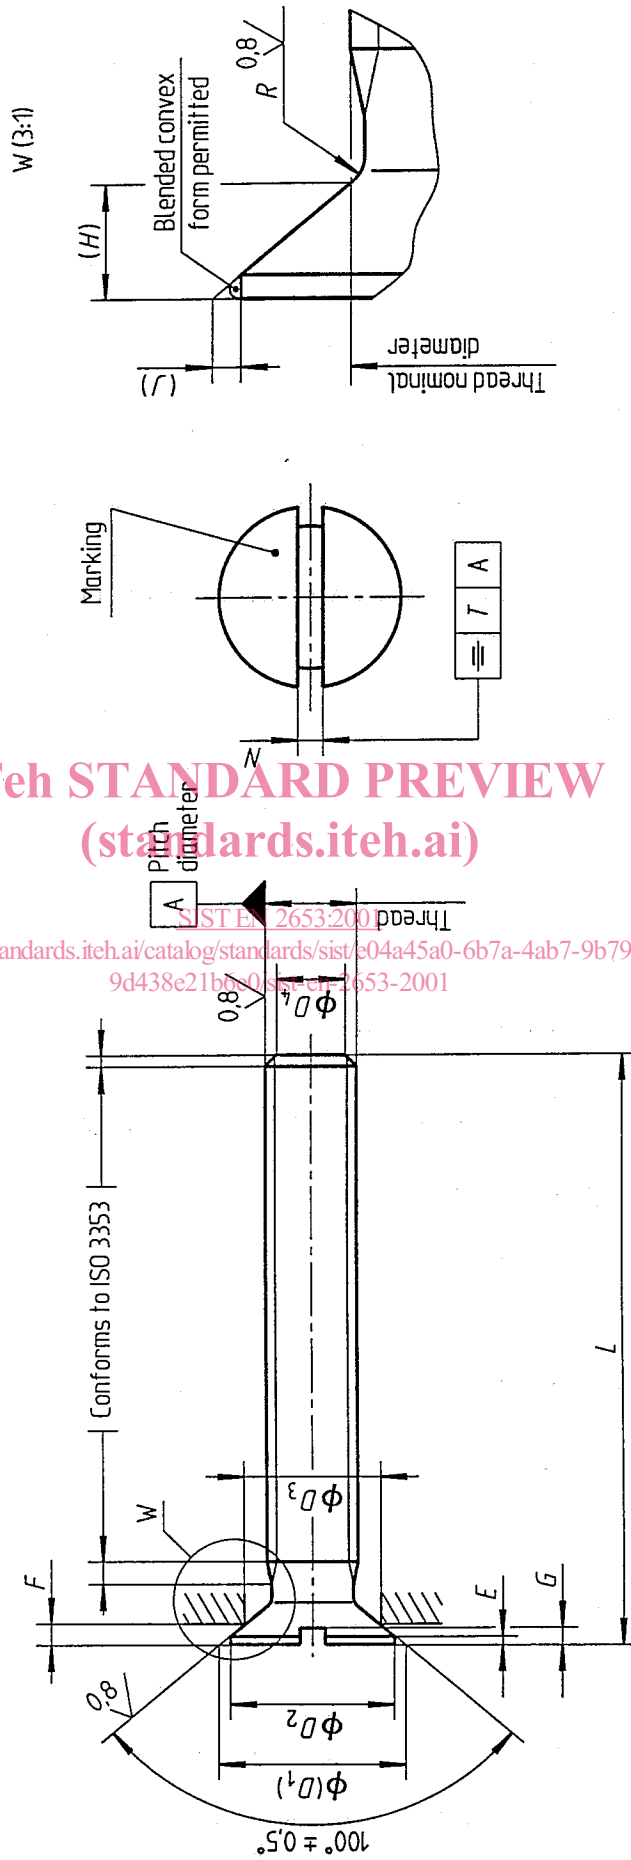


Figure 1

Table 1

Diameter code	Thread 1)	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>		E	F	G		H	L ± 0,3 2) 3)		N	R	T	Mass 4)	
		max.	min.	nom.	Tol.	min.			max.	Code		nom.	0				5) 6)	
016	MJ1,6x0,35 - 4h6h	3,2	2,9	2,25	1,1		0,03	0,4	0,5	0,3	0,69	0,16	004 to 022	4 to 22	0,45	0,08	0,05	0,023
020	MJ2x0,4 - 4h6h	4	3,6	2,89	1,4		0,04	0,46	0,55	0,35	0,85	0,2	004 to 028	4 to 28	0,55	0,1	0,085	0,037
025	MJ2,5x0,45 - 4h6h	5	4,5	3,86	1,9	0	0,05	0,48	0,7	0,5	1,07	0,25	006 to 036	6 to 36	0,65	0,12	0,202	0,06
030	MJ3x0,5 - 4h6h	6	5,4	4,5	2,3	- 0,5	0,06	0,63	0,85	0,6	1,27	0,3	006 to 042	6 to 42	0,85	0,15	0,301	0,088
035	MJ3,5x0,6 - 4h6h	7	6,3	5,14	2,7		0,07	0,78	0,95	0,7	1,48	0,35	008 to 050	8 to 50	0,95	0,17	0,54	0,119
040	MJ4x0,7 - 4h6h	8	7,2	5,78	3		0,08	0,93	1,1	0,8	1,69	0,4	008 to 056	8 to 56	1,05	0,2	0,72	0,155
050	MJ5x0,8 - 4h6h	10	9	7,71	3,4		0,1	0,96	1,35	1	2,12	0,5	010 to 068	10 to 68	1,25	0,25	1,44	0,248
060	MJ6x1 - 4h6h	12	10,8	9	4,2	± 0,5	0,1	1,26	1,6	1,2	2,54	0,6	012 to 084	12 to 84	1,65	0,7	0,3	0,353


1) In accordance with ISO 5855-2, rolled

2) Increments :

2 for  $L \leq 100$ 4 for  $L > 100$ 3) If greater lengths are required, they shall be chosen using the above increments. The length code corresponds to the length  $L$ , completed by one or two zeros to the left, where necessary, to obtain a three digit code.4) Approximate values (kg/1 000 pieces), calculated on the basis of 7,85 kg/dm<sup>3</sup>, given for information purposes only5) Value for first  $L$ 6) Increase for each additional 2 mm of  $L$

## 4 Designation

EXAMPLE :

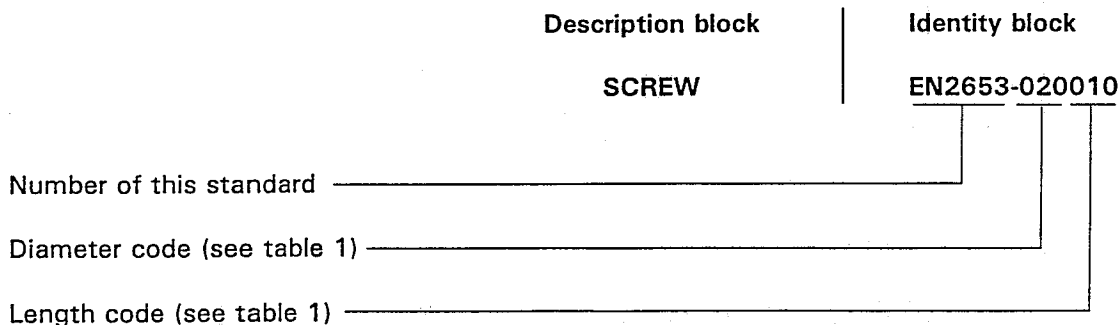

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

## 5 Marking

See table 2, plus MJ, and figure 1.

ITeCh STANDARD PREVIEW  
(standards.iteh.ai)

Table 2

Diameter code	EN 2424 Style
016 to 035	G
040 to 060	F (indented)

## 6 Approval of manufacturers

EN 2000

## 7 Packaging and labelling

### 7.1 Packaging

It shall prevent any damage or corrosion occurring during handling and transportation.

Each package shall only contain screws of the same identity block, taken from the same inspection batch.

### 7.2 Labelling

Each package shall bear a label on which the identity block, quantity, production batch number and inspector's stamp have been recorded.