



SLOVENSKI STANDARD
SIST EN 2754:2009

01-september-2009

5 YfcbUj h_U!`NU_cj bY'a UhWZgUa cj Ufcj UbYzXj cgfUbg_YzdfYa] bYzn`nj fhjbc
nUj U`UghY`j]U_Y!`?`Ug]z_UWU.`%\$\$`ADU#&`) š7

Aerospace series - Nuts, anchor, self locking, two lug, floating with counterbore -
Classification: 1100 MPa/235 °C

Luft- und Raumfahrt - Gehäuse-Anietmuttern, selbstsichernd, beweglich, beiderseitiger
Flansch mit zylindrischer Aussenkung - Klasse 1100 MPa/235 °C

Série aérospatiale - Écrous à river à freinage interne flottants, double patte avec
chambrage - Classification: 1100 MPa/235 °C

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>

Ta slovenski standard je istoveten z: EN 2754:2006

ICS:

49.030.30 Matice Nuts

SIST EN 2754:2009 en,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2754:2009

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>

EUROPEAN STANDARD

EN 2754

NORME EUROPÉENNE

EUROPÄISCHE NORM

April 2006

ICS 49.030.30

English Version

Aerospace series - Nuts, anchor, self locking, two lug, floating with counterbore - Classification: 1 100 MPa/235 °C

Série aérospatiale - Écrous à river à freinage interne
flottants, double patte avec chambrage - Classification : 1
100 MPa/235 °C

Luft- und Raumfahrt - Gehäuse-Annietmuttern,
selbstsichernd, beweglich, beiderseitiger Flansch mit
zylindrischer Aussenkung - Klasse: 1 100 MPa/235 °C

This European Standard was approved by CEN on 9 March 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 2754:2009](https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009)

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents		Page
Foreword		3
1 Scope		4
2 Normative references		4
3 Required characteristics		5
4 Designation		8
5 Marketing		8
6 Technical specification		8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 2754:2009](https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009)

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>

Foreword

This European Standard (EN 2754:2006) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2006, and conflicting national standards shall be withdrawn at the latest by October 2006.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITIH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2754:2009

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>

EN 2754:2006 (E)

1 Scope

This standard specifies the characteristics of two lug, counterbored, floating anchor nuts, with a self-locking feature achieved by forming the upper portion out-of-round, the dimensions of which are in conformity with ISO 3209.

These nuts are intended for use in aircraft assemblies, in which the fasteners are mainly subjected to shear loads. The counterbore of nuts with thread diameter equal to or greater than 4 mm is deep enough to accommodate a bolt shank in excess of assembly thickness, as well as the incomplete threads.

The 3 mm diameter nut has no counterbore.

They are intended to be used with threaded parts of 1 100 MPa ¹⁾ tensile strength classification.

The cadmium plating restricts the application to temperatures not exceeding 235 °C.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3209, *Aerospace — Nuts, anchor, self-locking, floating, two lug, with counterbore, with MJ threads, classifications: 1 100 MPa (at ambient temperature)/235 °C, 1 100 MPa (at ambient temperature)/315 °C and 1 100 MPa (at ambient temperature)/425 °C — Dimensions.*

ISO 5855-1, *Aerospace — MJ threads — (Part 1: General requirements.*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts.*

ISO 5858, *Aerospace — Nuts, self-locking with maximum operating temperature less than or equal to 425 °C — Procurement specification.*

ISO 8788, *Aerospace — Nuts, metric — Tolerances of form and position.*

EN 2133, *Aerospace series — Cadmium plating of steels with specified tensile strength $\leq 1\,450$ MPa, copper, copper alloys and nickel alloys.*

EN 2424, *Aerospace series — Marking of aerospace products.*

EN 2491, *Aerospace series — Molybdenum disulphide dry lubricants — Coating methods.*

EN 2542, *Aerospace series — Steel FE-PL43S — Annealed — Bar and wire — $D_e \leq 40$ mm — for prevailing torque nuts.* ²⁾

EN 2543, *Aerospace series — Steel FE-PL43S — Annealed — Sheet and strip — $0,3 \leq a \leq 2$ mm — for prevailing torque nuts.* ²⁾

EN 9100, *Aerospace series — Quality management systems — Requirements (based on ISO 9001:2000) and Quality systems — Model for quality assurance in design, development, production, installation and servicing (based on ISO 9001:1994).*

1) This strength class applies at room temperatures.

2) Published as AECMA Prestandard at the date of publication of this standard.

3 Required characteristics

3.1 Configuration – Dimensions – Tolerances

The configuration shall be in accordance with Figure 1; the dimensions and tolerances shall conform to the values shown in Figure 1 and Table 1, before cadmium plating and MoS₂ lubrication.

3.2 Surface roughness

See Figure 1. The values apply before cadmium plating and MoS₂ lubrication.

They do not apply to the thread, sheared-off edges and punched holes obtained by common manufacturing processes.

3.3 Materials

Steel EN 2542 or EN 2543.

3.4 Surface treatment

Cadmium plating EN 2133, 5 µm minimum on the threads and all areas which can be contacted by a 20 mm diameter ball. On all other areas, a continuous deposit shall be present, but no minimum value is specified.

Lubrication by MoS₂ EN 2491, mandatory on threads, optional on other surfaces.

ITEH STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 2754:2009

<https://standards.iteh.ai/catalog/standards/sist/3376838a-0d6d-4693-9cca-86b3028e518f/sist-en-2754-2009>


EN 2754:2006 (E)

6,3 / [0,8]

Break sharp edges 0,1 mm to 0,4 mm

Float included

Section Y-Y

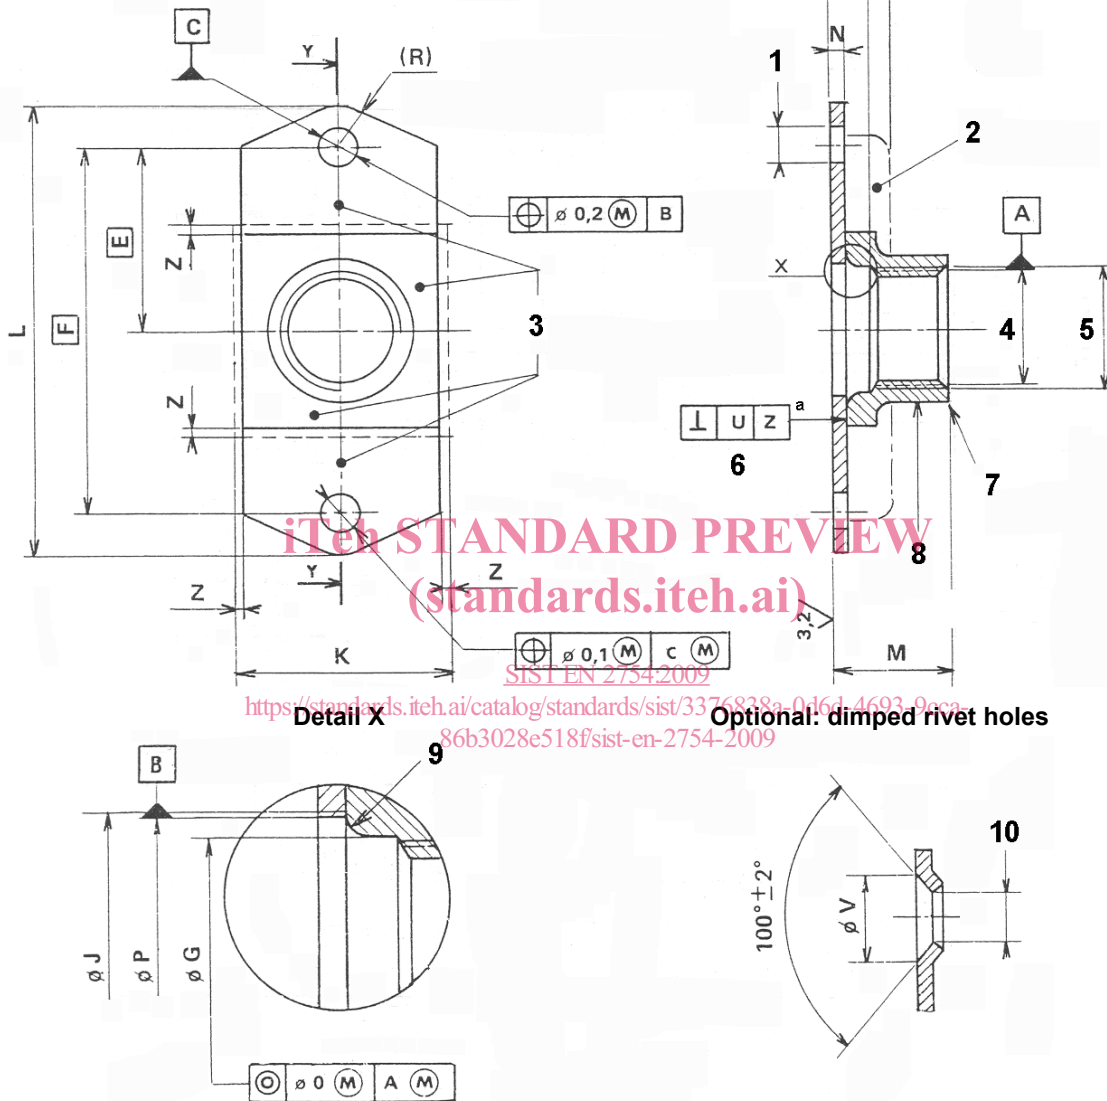

Optional: dimpled rivet holes

Key

- | | | | |
|---|-----------------------------------------------------------------------|----|--------------------------------------------------------------------------------------------------------|
| 1 | 2 holes $\varnothing S +0,2_0$; Plain rivet holes | 7 | Form out-of-round in this area to achieve the self-locking torque requirement (tool marks permissible) |
| 2 | Cage | 8 | Threaded element |
| 3 | Part marking in these areas | 9 | Radius or chamfer |
| 4 | Pitch \varnothing | 10 | 2 holes $\varnothing S +0,4_0$; Dimpled rivet holes |
| 5 | Threads | a | For inspection requirements, see Clause 6. |
| 6 | Applicable over a diameter equal to the width of the threaded element | | |

Details of form, not stated, are at the manufacturer's option.

Figure 1 — Configuration

Table 1 — Dimensions

Dimensions in millimetres

Diamètre code	Thread ^a	<i>E</i>	<i>F</i>	<i>G</i>	<i>H</i>	<i>J</i> ^b	<i>K</i>	<i>L</i>	<i>M</i>
				min.	min.	max.	max.	max.	max.
030	MJ 3 × 0,50 – 4H 6H	8,5	17	c	c	4,6	11	23,2	4
040	MJ 4 × 0,70 – 4H 6H	8,5	17	4,4	2,2	6,2	11	23,2	5,8
050	MJ 5 × 0,80 – 4H 6H	9,5	19	5,5	2,4	7,3	12	25,2	6,9
060	MJ 6 × 1,00 – 4H 5H	11	22	6,5	2,7	8,7	13,5	29,2	8,1
080	MJ 8 × 1,00 – 4H 5H	11	22	8,5	2,7	10,9	16	29,2	9,9
100	MJ 10 × 1,25 – 4H 5H	13	26	10,5	3	12,9	18	35,2	12

Diamètre code	<i>N</i> ^d	<i>P</i>	<i>R</i> aux.	<i>S</i>	<i>T</i>	<i>U</i>	<i>V</i>	<i>Z</i> Radial float	Mass kg/1 000 pieces
	max.	min.			max.		± 0,25	min.	max.
030	0,9	4,5	3	2,5	4,5	0,15	4,8	0,5	1,8
040	0,9	5,5	3	2,5	4,5	0,15	4,8	0,5	2
050	0,9	6,5	3	2,5	4,5	0,18	4,8	0,7	2,3
060	0,9	7,5	3,5	2,5	4,6	0,18	4,8	0,7	3,8
080	1,1	9,5	3,5	3	5,5	0,20	5,7	0,75	7,3
100	1,1	11,5	4,5	3,5	6	0,23	6,6	0,75	10

Tolerances of form and position are in conformity with ISO 8788.

^a In conformity with ISO 5855 parts 1 and 2. In the self-locking zone, the tolerances apply before deformation.

^b $\varnothing J$ is to be measured at sharp corners (chamfered) or point of tangency (radiused)

^c The 3 mm diameter nut does not include a counterbore.

^d Dimension *N* is the lug thickness at the rivet hole location.