

SLOVENSKI STANDARD

SIST EN 2863:2010

01-april-2010

Aeronautika - Zakovne matice, samozapiralne, fiksne, rob 90°, z izvrtino za vijke, iz toplotnoodpornega jekla, mazane z MoS2 - Klasifikacija: 1100 MPa (pri temperaturi okolice)/315 °C

Aerospace series - Nuts, anchor, self-locking, fixed, 90° corner, with counterbore, in heat resisting steel, MoS2 lubricated - Classification: 1100 MPa (at ambient temperature)/315 °C

iTeh STANDARD PREVIEW

Luft- und Raumfahrt - Anniemuttern, selbstsichernd, 90° Eckflansch, mit zylindrischer Aussenkung, aus hochwarmfestem Stahl, MoS2-geschmiert - Klasse : 1 100 MPa (bei Raumtemperatur)/315 °C

[SIST EN 2863:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135->

Série aérospatiale - Ecrous à river, à freinage interne, fixes, d'angle 90°, avec chambrage, en acier résistant à chaud, lubrifiés MoS2 - Classification: 1100 MPa (à température ambiante)/315 °C

Ta slovenski standard je istoveten z: EN 2863:2010

ICS:

49.030.30 Matrice Nuts

SIST EN 2863:2010 **en,de**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 2863:2010](#)

[https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-
216a1012b8c4/sist-en-2863-2010](https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-216a1012b8c4/sist-en-2863-2010)

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 2863

February 2010

ICS 49.030.30

English Version

**Aerospace series - Nuts, anchor, self-locking, fixed, 90° corner,
with counterbore, in heat resisting steel, MoS₂ lubricated -
Classification: 1 100 MPa (at ambient temperature) / 315 °C**

Série aérospatiale - Écrous à river, à freinage interne, fixes,
d'angle 90°, avec chambrage, en acier résistant à chaud,
lubrifiés MoS₂ - Classification : 1 100 MPa (à température
ambiante) / 315 °C

Luft- und Raumfahrt - Anniemettern, selbstsichernd, 90°
Eckflansch, mit zylindrischer Aussenkung, aus
hochwarmfestem Stahl, MoS₂-geschmiert - Klasse: 1 100
MPa (bei Raumtemperatur) / 315 °C

This European Standard was approved by CEN on 17 October 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

**The STANDARD PREVIEW
(standardpreview)**

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

	Page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics.....	5
4 Designation	7
5 Marking	8
6 Technical specification	8

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 2863:2010

[https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-
216a1012b8c4/sist-en-2863-2010](https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-216a1012b8c4/sist-en-2863-2010)

Foreword

This document (EN 2863:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2010, and conflicting national standards shall be withdrawn at the latest by August 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

The STANDARD PREVIEW (standards.iteh.ai)

SIST EN 2863:2010

<https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-216a1012b8c4/sist-en-2863-2010>

1 Scope

This standard specifies the characteristics of 90° corner, counterbored fixed anchor nuts, with a self-locking feature achieved by forming the upper portion out-of-round, in heat resisting steel, MoS₂ lubricated.

Classification: 1 100 MPa ¹⁾ / 315 °C ²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2398, Aerospace series — Heat resisting steel FE-PA2601 (X6NiCrTiMoV26-15) — $R_m \geq 900 \text{ MPa}$ — Bars for machined bolts — $D \leq 25 \text{ mm}$

EN 2399, Aerospace series — Heat resisting steel FE-PA2601 (X4NiCrTiMoV26-15) — $R_m \geq 900 \text{ MPa}$ — Bars for forged bolts — $D \leq 25 \text{ mm}$

EN 2424, Aerospace series — Marking of aerospace products

EN 2491, Aerospace series — Molybdenum disulphide dry lubricants — Coating methods

EN 3638, Aerospace series — Heat resisting alloy FE-PA2601 (X6NiCrTiMoV26-15) — Consumable electrode remelted — Solution and precipitation treated — Sheet, strip and plate — $0.5 \text{ mm} \leq a \leq 10 \text{ mm}$
iTeh STANDARD PREVIEW
(standards.iteh.ai)

EN 3639, Aerospace series — Heat resisting alloy FE-PA2601 — Softened and cold worked — Wire for forged fasteners — $D \leq 15 \text{ mm}$ — $900 \text{ MPa} \leq R_m \leq 1 100 \text{ MPa}$ ³⁾ SIST EN 2863:2010
<https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135>

EN 9100, Quality Management Systems — Requirements for Aviation, Space and Defense Organizations

EN 9133, Aerospace series — Quality management systems — Qualification procedure for aerospace standard parts

ISO 3221, Aerospace — Nuts, anchor, self-locking, fixed, 90° corner, with counterbore, with MJ threads, classifications: 1 100 MPa (at ambient temperature)/235 °C, 1 100 MPa (at ambient temperature)/315 °C and 1 100 MPa (at ambient temperature)/425 °C — Dimensions

ISO 5855-2, Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts

ISO 5858, Aerospace — Nuts, self-locking, with maximum operating temperature less than or equal to 425 °C — Procurement specification

ISO 8788, Aerospace — Nuts, metric — Tolerances of form and position

TR 3791, Aerospace series — Materials for self-locking nuts, threaded inserts and screw thread inserts of temperature classes ≤ 425 °C ⁴⁾

1) Corresponds to strength class of the associated bolt, the 100 % load of which it is able to withstand, when tested at ambient temperature, without breaking or cracking.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the surface treatment.

3) Published as ASD-STAN Prestandard at the date of publication of this standard.

4) Published as ASD-STAN Technical Report at the date of publication of this standard.

3 Required characteristics

3.1 Configuration — Dimensions — Masses

See Figure 1 and Table 1.

Dimensions and tolerances are in conformity with ISO 3221, expressed in millimetres and apply before MoS₂ lubrication.

Form and position tolerances shall be in conformity with ISO 8788.

3.2 Materials

EN 2398, EN 2399, EN 3638, 3639 or TR 3791.

3.3 Surface treatment

EN 2491, thickness not specified.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2863:2010


<https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a4bd-4623-b135-216a1012b8c4/sist-en-2863-2010>

6,3 ✓ [3,2 ✓]

These values in micrometres apply before surface treatment. The values do not apply to threads and sheared edges the surface texture of which will be achieved by usual manufacturing methods.

Remove sharp edges 0,1 to 0,4.

Details of form, not stated, are at the manufacturer's option.

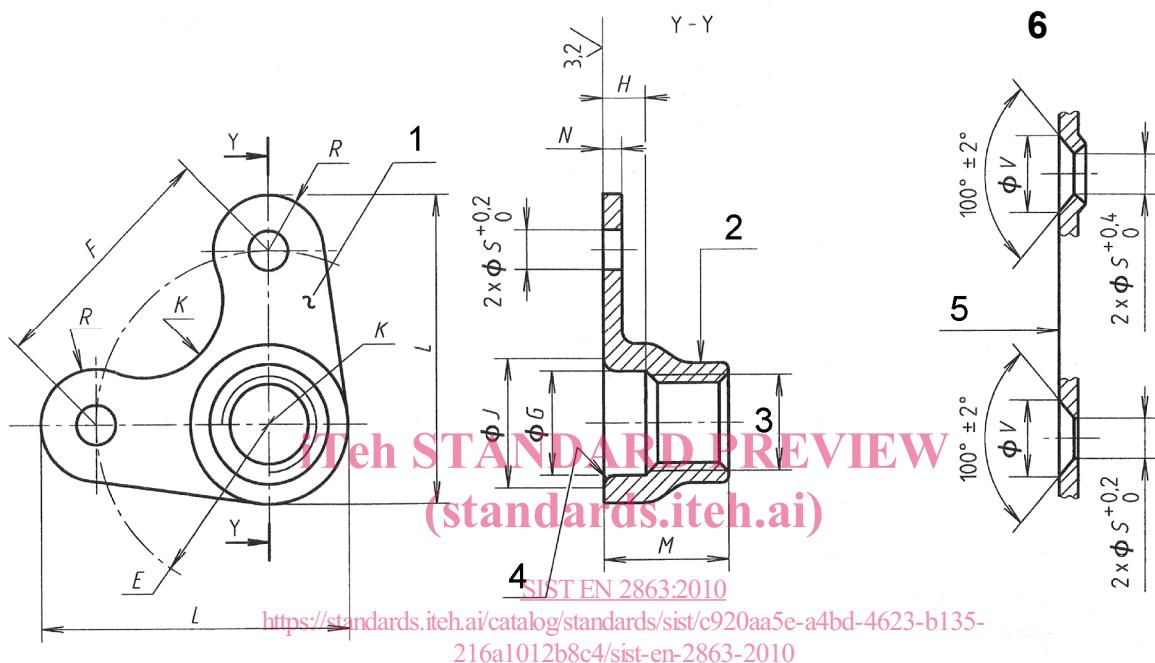

Key

- 1 Marking
- 2 Radius or chamfer
- 3 Thread
- 4 Form out-of-round in this area to achieve the self-locking. Tooling marks are permitted in this area.
- 5 Bearing face of the nut
- 6 Alternatives: countersunk rivet holes (when specified by purchaser) may be dimpled or cut countersunk (at manufacturer's option).

Figure 1

Table 1

Diameter code	Thread ^a	E	F	G min.	H min.	J ^b max.	K max.	L max.	M max.	N ^c max.	R	S	V	Mass kg/1 000 pieces approx.
030	MJ3×0,5-4H6H	6	8,5	d	d	4,6	3	11,7	3,2		2,5			0,5
040	MJ4×0,7-4H6H	8,5	12	4,4	2,2	6,2	4	15,7	5,8	1	3	2,5	4,8	1,1
050	MJ5×0,8-4H6H	9,5	13,4	5,5	2,4	7,3	4,5	17,2	6,9					1,4
060	MJ6×1-4H5H	11	15,6	6,5	2,7	8,7	5	19,7	8,1	1,2	3,5			2,2
080	MJ8×1-4H5H			8,5		10,9	6,5	21,2	9,9	1,5		3	5,7	4,6
100	MJ10×1,25-4H5H	13	18,4	10,5	3	12,9	8,1	25,8	12	1,6	4,5	3,5	6,6	7,8

^a In accordance with ISO 5855-2. In the self-locking zone, the tolerances apply before forming out-of-round.
^b Is to sharp corners (chamfered) or point of tangency (radiused).
^c Is applicable at the rivet hole location.
^d Diameter code 030 does not have a counterbore.

4 Designation

EXAMPLE

iTeh STANDARD PREVIEW

(standards.iteh.ai)

Description block

Identity block

SIST EN 2863:2010

NUT

EN2863-060

<https://standards.iteh.ai/catalog/standards/sist/c920aa5e-a40d-4623-9f15-216a1012b8c4/sist-en-2863-2010>

Number of this standard

Code (see Table 2)

Diameter code (see Table 1)

NOTE If necessary the originator code I9005 shall be placed between the description block and the identity block.

Table 2

Option	Code
Plain rivet holes	— (hyphen)
Dimpled or countersunk rivet holes	K