



SLOVENSKI STANDARD

SIST EN 2869:2010

01-januar-2010

5 YfcbUj h_U!`A UjWZyYgfcVYžn`nUFYnc# fcbg_Yžbcfa UbUj jý]bUžn`bcfa Ubja
nYj ca ` `1 Už]n`hcd`cHbccXdcfbY[U`U`UždUg]j jfUbY!`?`Ug]Z_UWYU.`%\$\$`ADUfdj]
hYa dYfUi f]c_c`jWt#) \$ š7

Aerospace series - Nuts, hexagonal, slotted/castellated, normal height, normal accross flats, in heat resisting steel, passivated - Classification: 1100 MPa (at ambient temperature)/650 °C

iTeh STANDARD PREVIEW
(standards.iteh.ie)

Luft- und Raumfahrt - Flache Kronenmuttern, normale Höhe, normale Schlüsselweite, aus hochwarmfestem Stahl, passiviert - Klasse: 1100 MPa (bei Raumtemperatur)/650 °C

Série aérospatiale - Écrous hexagonaux à créneaux, hauteur normale, surplats normaux, en acier résistant à chaud, passivés - Classification: 1100 MPa (à température ambiante)/650 °C

Ta slovenski standard je istoveten z: EN 2869:2009

ICS:

49.030.30 Matice Nuts

SIST EN 2869:2010 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2869:2010

<https://standards.iteh.ai/catalog/standards/sist/06df218e-69a2-4ade-bef2-39b6b915ea51/sist-en-2869-2010>

ICS 49.030.30

English Version

**Aerospace series - Nuts, hexagonal, slotted/castellated, normal height, normal accross flats, in heat resisting steel, passivated -
Classification: 1 100 MPa (at ambient temperature) / 650 °C**

Série aérospatiale - Écrous hexagonaux à créneaux, hauteur normale, surplats normaux, en acier résistant à chaud, passivés - Classification : 1 100 MPa (à température ambiante) / 650 °C

Luft- und Raumfahrt - Flache Kronenmuttern, normale Höhe, normale Schlüsselweite, aus hochwarmfestem Stahl, passiviert - Klasse: 1 100 MPa (bei Raumtemperatur) / 650 °C

This European Standard was approved by CEN on 17 October 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics.....	5
4 Designation	7
5 Marking	7
6 Technical specification	8
Bibliography.....	9

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2869:2010

<https://standards.iteh.ai/catalog/standards/sist/06df218e-69a2-4ade-bef2-39b6b915ea51/sist-en-2869-2010>

Foreword

This document (EN 2869:2009) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2010, and conflicting national standards shall be withdrawn at the latest by May 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2869:2010

<https://standards.iteh.ai/catalog/standards/sist/06df218e-69a2-4ade-bef2-39b6b915ea51/sist-en-2869-2010>

EN 2869:2009 (E)**1 Scope**

This European Standard specifies the characteristics of hexagonal slotted/castellated nuts, normal height, normal across flats, in heat resisting steel, passivated.

Classification: 1 100 MPa ¹⁾ / 650 °C ²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2398, *Aerospace series — Heat resisting steel FE-PA2601 (X6NiCrTiMoV26-15) — $R_m \geq 900$ MPa — Bars for machined bolts — $D \leq 25$ mm*

EN 2399, *Aerospace series — Heat resisting steel FE-PA2601 (X4NiCrTiMoV26-15) — $R_m \geq 900$ MPa — Bars for forged bolts — $D \leq 25$ mm*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2516, *Aerospace series — Passivation of corrosion resisting steels and decontamination of nickel base alloys*

EN 3639, *Aerospace series — Heat resisting alloy FE-PA2601 — Softened and cold worked — Wire for forged fasteners — $D \leq 15$ mm — $900 \text{ MPa} \leq R_m \leq 1,100 \text{ MPa}$ ³⁾*

EN 9100, *Quality Management Systems - Requirements for Aviation, Space and Defense Organizations*

ISO 4147, *Aerospace — Nuts, hexagonal, slotted (castellated), normal height, normal across flats, with MJ threads, classifications: 600 MPa (at ambient temperature)/120 °C, 600 MPa (at ambient temperature)/235 °C, 900 MPa (at ambient temperature)/425 °C, 1100 MPa (at ambient temperature)/235 °C, 1100 MPa (at ambient temperature)/315 °C, 1100 MPa (at ambient temperature)/650 °C, 1210 MPa (at ambient temperature)/730 °C, 1250 MPa (at ambient temperature)/235 °C and 1550 MPa (at ambient temperature)/600 °C — Dimensions*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 8788, *Aerospace — Nuts, metric — Tolerances of form and position*

ISO 9139, *Aerospace — Nuts, plain or slotted (castellated) — Procurement specification*

TR 3823, *Aerospace series — Materials for plain, slotted and self-locking by plastic ring hexagonal nuts* ⁴⁾

1) Corresponds to strength class of the associated bolt, the 100 % load of which it is able to withstand, when tested at ambient temperature, without breaking or cracking.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the material.

3) Published as ASD-STAN Prestandard at the date of publication of this standard.

4) Published as ASD-STAN Technical Report at the date of publication of this standard.

3 Required characteristics

3.1 Configuration — Dimensions — Masses

See Figure 1 and Table 1.

Dimensions and tolerances are in conformity with ISO 4147, expressed in millimetres and apply after surface treatment.

Form and position tolerances shall be in conformity with ISO 8788.

3.2 Materials

EN 2398, EN 2399, EN 3639 or TR 3823.

3.3 Surface treatment

EN 2516, process class appropriate to the material.


$6,3 \sqrt{\quad}$ $\left[\begin{array}{c} 1,6 \sqrt{\quad} \\ \quad \end{array} \right]$ These values in micrometres apply before surface treatment. The values do not apply to threads the surface texture of which will be achieved by usual manufacturing methods.

Remove sharp edges 0,1 to 0,4.

Details of form not stated are at the manufacturer's option.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2869:2010
<https://standards.iteh.ai/catalog/standards/sist/06df218e-69a2-4ade-bef2-39b6b915ea51/sist-en-2869-2010>

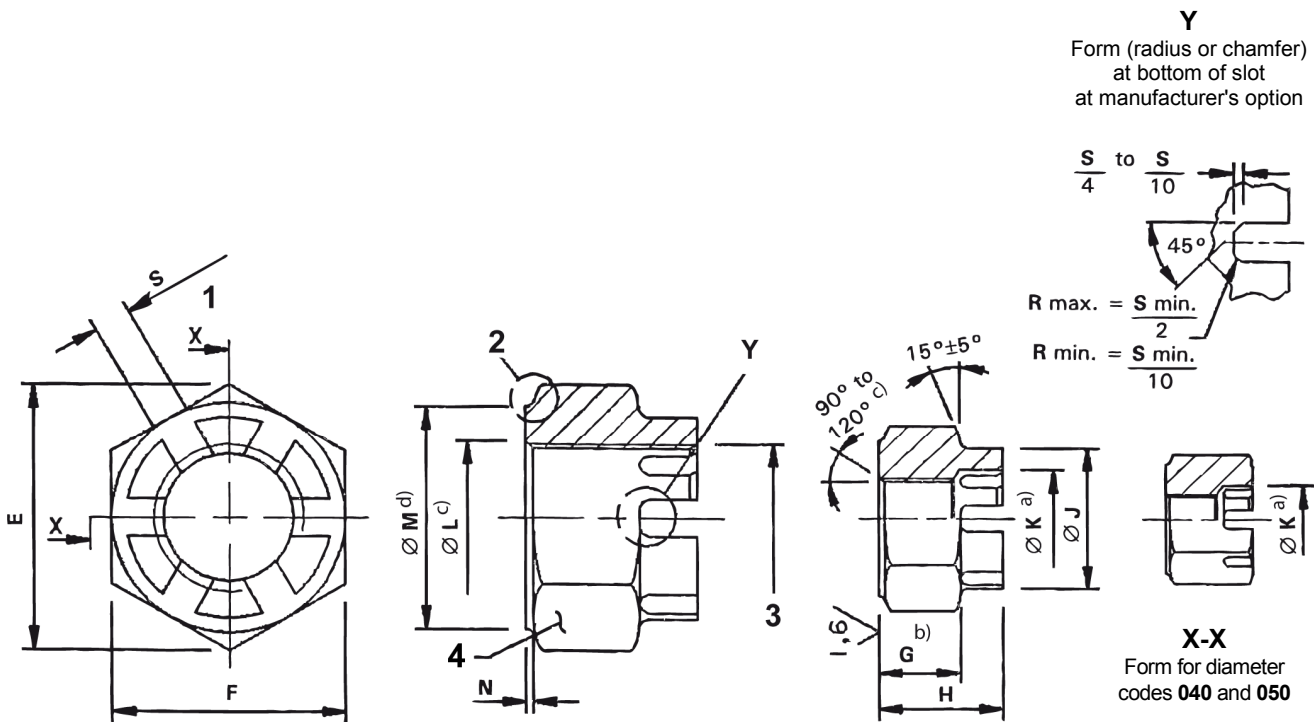

X-X
Form for diameter
codes **080** to **240**

X-X
Form for diameter
codes **060** and **070**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Key

- 1 6 Slots
- 2 Form of contour within limiting dimensions at manufacturer's option
- 3 Thread
- 4 Marking

a Tooling marks are permissible within counterbore.

b Dimension *G* applies to:

- height below slots (diameter codes 040 to 240);
- height of flats (diameter codes 060 to 240);
- bottom of counterbore (diameter 040 to 070).

c This dimension also applies to upper chamfer. All forms of entry (chamfer or radius) optional within these limiting dimensions.

d Diameter *M* may be tangential to, but shall not intrude on the flats.

Figure 1

Table 1

Diameter code	Thread ^a	E		F		G	H	J	K	L		M	N	S	Mass kg/1 000 pieces approx.	Split pin diameter ^b
		min.	Nom.	Tol.	± 0,25	± 0,25	± 0,25	H15	min.	Tol.	min.	0 - 0,3	H14			
040	MJ4×0,7 - 4H6H	7,6	7	h12	3	5	—	4	4,2	+ 0,6	6,4	0,5	1,3	1,3	1	
050	MJ5×0,8 - 4H6H	8,7	8		3,75	6,2	—	5	5,2		7,4		1,7	1,8		
060	MJ6×1 - 4H5H	10,9	10	4,5	6,9	9	6	6,3	9,3	2,1	2,8		1,8			
070	MJ7×- 4H5H	12	11	5,25	8,1	10	7	7,3	10,2	3,8						
080	MJ8×1 - 4H5H	14,3	13	6	8,8	11	—	8,3	12,2	5,6						
100	MJ10×1,25 - 4H5H	18,9	17	h13	7,5	11,1	13	—	10,3	16	0,6		2,6	11,5	2,3	
120	MJ12×1,25 - 4H5H	21,1	19		9	12,6	16	—	12,3	18			16			
140	MJ14×1,5 - 4H5H	24,5	22		10,5	14,9	18	—	14,4	21			3,2	24,5	2,9	
160	MJ16×1,5 - 4H5H	26,8	24		12	16,4	22	—	16,4	23			33,5			
180	MJ18×1,5 - 4H5H	30,2	27		13,5	18,7	25	—	18,4	26			4	48,5	3,7	
200	MJ20×1,5 - 4H5H	33,6	30		15	20,2	28	—	20,4	29		66				
220	MJ22×1,5 - 4H5H	35,8	32		16,5	21,7	30	—	22,4	30,9		78,9				
240	MJ24×2 - 4H5H	40,4	36		18	23,7	32	—	24,5	34,9		113,9				

^a In accordance with ISO 5855-2.

^b For information, in conformity with EN 2367.

(standards.iteh.ai)

4 Designation

SIST EN 2869:2010

<https://standards.iteh.ai/catalog/standards/sist/06df218e-69a2-4ade-bef2-39b6b915ea51/sist-en-2869-2010>

EXAMPLE

Description block

Identity block

NUT

EN2869-080

Number of this standard _____

Diameter code (see Table 1) _____

NOTE If necessary the originator code I9005 shall be placed between the description block and the identity block.

5 Marking

See Table 2.

Table 2

Diameter code	EN 2424 Style
040	G
050 to 070	N
080 to 160	C
180 to 240	A