

Edition 2.0 2010-07

INTERNATIONAL STANDARD





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Email: inmail@iec.ch Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

■ Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications,

■ IEC Just Published: www.iec.ch/online news/justpub

Stay up to date on all new IEC publications. Just Published details wice a month all new publications released. Available on-line and also by email.

Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

■ Customer Service Centre: www.iec.ch/webstore/custserv
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch Tel.: +41 22 919 02 11 Fax: +41 22 919 03 00




Edition 2.0 2010-07

INTERNATIONAL STANDARD



Industrial communication networks - Profiles - Part 5 2: Installation of fieldbuses - Installation profiles for CPF 2

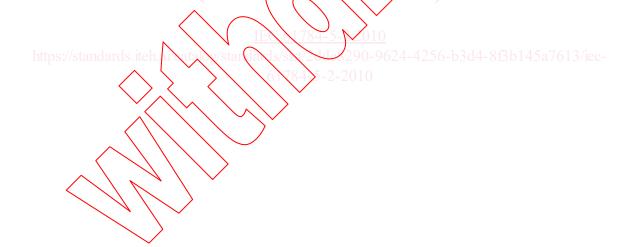

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE XG

ICS 25.040.40; 35.100.40

ISBN 978-2-88912-053-6

CONTENTS

FO	PREWORD	7
IN	TRODUCTION	9
1	Scope	10
2	Normative references	10
3	Terms, definitions and abbreviated terms	10
4	CPF 2: Overview of installation profiles	10
5	Installation profile conventions	11
6	Conformance to installation profiles	12
An	nex A (normative) CP 2/1 (ControlNet™) specific installation profile	13
An	nex B (normative) CP 2/2 (EtherNet/IP™) specific installation profile	65
An	nex C (normative) CP 2/3 (DeviceNet™) specific installation profile	92
An	nex D (informative) Additional information	149
Bib	pliography	153
		_
_		9
	gure A.1 – Interconnection of CPF 2 networks	
_	gure A.2 – Overview of CPF 2/1 networks	_
Fig	gure A.3 – Drop cable requirementsgure A.4 – Placement of BNC/TNC plugs	17
Fig	gure A.4 – Placement of BNC/TNC plugs	17
	gure A.5 – Placement of terminators	
	gure A.6 – Extending a network using repeaters	
	gure A.7 – Extending a network using active star topology	
_	gure A.8 – Links	
	gure A.9 – Extending the network beyond 99 nodes	
	gure A.10 – Maximum allowable taps per segment	
	gure A.11 - Example of repeaters in star configuration	
	gure A.12 Repeaters in parallel	
	gure A.13 Repeaters in combination series and parallel	
_	gure A.14 – Ring repeater	
	gure A.15 – Installing bulkheads	
	gure A.16 – Coaxial BNC and TNC terminators	
_	gure A.17 – Terminator placement in a segment	
_	gure A.18 – Redundant network icons	
_	gure A.19 – Redundant coax media	
Fig	gure A.20 – Redundant fibre media	36
Fig	gure A.21 – Repeaters in series versus length difference for coax media	37
_	gure A.22 – Repeaters in series versus length difference for fibre media	
_	gure A.23 – Example of redundant coax network with repeaters	
Fig	gure A.24 – Example of improper redundant node connection	38
_	gure A.25 – Example tool kit for installing BNC connectors	
Fig	gure A.26 – Calibration of coaxial stripper	43

Figure A.27 – Coax PVC strip length detail	43
Figure A.28 – Memory cartridge and blade	44
Figure A.29 – Cable position	44
Figure A.30 – Locking the cable	45
Figure A.31 – Stripping the cable	45
Figure A.32 – Install the crimp ferrule	46
Figure A.33 – Cable preparation for PVC type cables	46
Figure A.34 – Cable preparation for FEP type cables	46
Figure A.35 – Strip guides	47
Figure A.36 – Using the flare tool	47
Figure A.37 – Expanding the shields	48
Figure A.38 – Install the centre pin	48
Figure A.39 – Crimping the centre pin	48
Figure A.40 – Installing the connector body	49
Figure A.41 – Installing the ferrule	49
Figure A.42 – Crimp tool	49
Figure A.43 – Sealed IP67 cable	50
Figure A.44 – Terminator placement	51
Figure A.45 – Mounting the taps	52
Figure A.46 - Mounting the tap assembly using the universal mounting bracket	52
Figure A.47 – Mounting the tap using tie wraps or screws	53
Figure A.48 – Redundant network icons	53
Figure A.49 – Network test tool	1.3/jee. 56
Figure A.50 – Shorting the cable to test for continuity	
Figure A.51 – Testing fibre segments	59
Figure A.52 – Multivibre backbone cable housing	60
Figure A.53 – Repeater adapter module	61
Figure A.54 - Short and medium distance fibre module LEDs	63
Figure A.55 - Long and extra long repeater module LEDs	63
Figure B.1 Interconnection of CPF 2 networks	
Figure B.2 – Peer to peer connections	
Figure B.3 – Mated connections	
Figure B.4 – The 8-way modular sealed jack & plug (plastic housing)	75
Figure B.5 – The 8-way modular sealed jack & plug (metal housing)	
Figure B.6 – M12-4 connectors	
Figure B.7 – Simplex LC connector	
Figure B.8 – Duplex LC connector	
Figure B.9 – IP65/IP67 sealed duplex LC connector	
Figure B.10 – M12-4 to 8-way modular bulkhead	
Figure B.11 – The 8-way modular sealed jack & plug (plastic housing)	
Figure B.12 – The 8-way modular sealed jack & plug (metal housing)	
Figure B.13 – M12-4 connectors	
Figure B 14 – Farthing of cable shield	87

Figure B.15 – Open shield example	87
Figure C.1 – Interconnection of CPF 2 networks	93
Figure C.2 – Connection to generic cabling	94
Figure C.3 – DeviceNet cable system uses a trunk/drop line topology	96
Figure C.4 – Measuring the trunk length	98
Figure C.5 – Measuring the trunk and drop length	98
Figure C.6 – Measuring drop cable in a network with multiports	99
Figure C.7 – Removable device using open-style connectors	99
Figure C.8 – Fixed connection using open-style connector	.100
Figure C.9 – Open-style connector pin out	. 100
Figure C.10 – Open-style connector pin out 10 position	. 100
Figure C.11 – Power supply sizing example	. 104
Figure C.12 – Current limit for thick cable for one power supply	. 105
Figure C.13 – Current for thick cable and two power supplies	. 106
Figure C.14 – Worst case scenario	. 107
Figure C.15 – Example using the lookup method	. 107
Figure C.16 – One power supply end connected	. 109
Figure C.17 – Segmenting power in the power bus(.110
Figure C.18 – Segmenting the power bus using power taps	. 110
Figure C.19 – Thick cable construction	.121
Figure C.20 – Mid cable construction	.121
Figure C.21 – Thin cable construction	. 122
Figure C.22 – Flat cable construction.	.122
Figure C.23 – Cable preparation	. 123
Figure C.24 – Connector assembly	. 123
Figure C.25 – Micro connector pin assignment	. 123
Figure C.26 – Mini connector pin assignment	. 124
Figure C.27 - Preparation of cable end	. 124
Figure Q.28 - Shrink wrap installation	. 125
Figure C.29 - Wike preparation	. 125
Figure C.30 – Open-style connector (female)	. 125
Figure C.31 – Open-style (male plug)	. 125
Figure C.32 – Flat cable	. 126
Figure C.33 – Aligning the cable	. 127
Figure C.34 – Closing the assembly	. 127
Figure C.35 – Proper orientation of cable	. 127
Figure C.36 – Locking the assembly	. 127
Figure C.37 – Driving the IDC contacts in to the cable	. 128
Figure C.38 – End cap placement	. 128
Figure C.39 – End cap seated	. 129
Figure C.40 – End cap installation alternate side of cable	. 129
Figure C.41 – Flat cable IDC connectors	. 130
Figure C.42 – Installing the connectors	. 130

Figure C.44 – Auxiliary power cable profile
Figure C.46 – Power supply cable length versus wire size
Figure C.47 – Sealed terminator
Figure C.48 – Open-style terminator
Figure C.49 – Open-style IDC terminator
Figure C.50 – Sealed terminator IDC cable
Figure C.51 – Direct connection to the trunk
Figure C.52 – Wiring of open-style connector
Figure C.53 – Wiring of open-style 10-position connector
Figure C.53 – Wiring of open-style 10-position connector
Figure C.55 – Thick cable preterminated cables (cord sets)
Table A.1 – Basic network characteristics for copper cabling not based on Ethernet (ISO/IEC 8802-3)
Table A.1 – Basic network characteristics for copper cabling not based on Ethernet (ISO/IEC 8802-3)
(ISO/IEC 8802-3)20Table A.2 – Allowable fibre lengths21Table A.3 – Power budgets for ControlNet fibre networks21Table A.4 – RG6 coaxial electrical properties22Table A.5 – RG6 coaxial physical parameters23Table A.6 – Cable type selection23Table A.7 – Information relevant to optical fibre cables24Table A.8 – Copper connectors for ControlNet25Table A.9 – Fibre connectors for fieldbus systems26Table A.10 – Relationship between FQC and fibre types (CP 2/1)26Table A.11 – Separation from other circuits inside enclosures35Table A.12 – Parameters for Coaxial RG6 Cables40Table A.13 – Bend radius for coaxial cables outside conduit40Table A.14 – Rarameters for silica optical fibre cables41Table A.15 – Rarameters for hard clad silica optical fibre41
(ISO/IEC 8802-3)20Table A.2 – Allowable fibre lengths21Table A.3 – Power budgets for ControlNet fibre networks21Table A.4 – RG6 coaxial electrical properties22Table A.5 – RG6 coaxial physical parameters23Table A.6 – Cable type selection23Table A.7 – Information relevant to optical fibre cables24Table A.8 – Copper connectors for ControlNet25Table A.9 – Fibre connectors for fieldbus systems26Table A.10 – Relationship between FQC and fibre types (CP 2/1)26Table A.11 – Separation from other circuits inside enclosures35Table A.12 – Parameters for Coaxial RG6 Cables40Table A.13 – Bend radius for coaxial cables outside conduit40Table A.14 – Rarameters for silica optical fibre cables41Table A.15 – Rarameters for hard clad silica optical fibre41
Table A.3 – Power budgets for ControlNet fibre networks
Table A.4 – RG6 coaxial electrical properties
Table A.4 – RG6 coaxial electrical properties
Table A.6 – Cable type selection
Table A.7 – Information relevant to optical fibre cables
Table A.8 – Copper connectors for ControlNet25Table A.9 – Fibre connectors for fieldbus systems26Table A.10 – Relationship between FQC and fibre types (CP 2/1)26Table A.11 – Separation from other circuits inside enclosures35Table A.12 – Parameters for Coaxial RG6 Cables40Table A.13 – Bend radius for coaxial cables outside conduit40Table A.14 – Rarameters for silica optical fibre cables41Table A.15 – Rarameters for hard clad silica optical fibre41
Table A.9 – Fibre connectors for fieldbus systems 2010 Table A.10 – Relationship between FQC and fibre types (CP 2/1) 26 Table A.11 – Separation from other circuits inside enclosures 35 Table A.12 – Parameters for Coaxial RG6 Cables 40 Table A.13 – Bend radius for coaxial cables outside conduit 40 Table A.14 – Rarameters for silica optical fibre cables 41 Table A.15 – Rarameters for hard clad silica optical fibre 41
Table A.10 – Relationship between FQC and fibre types (CP 2/1)
Table A.10 – Relationship between FQC and fibre types (CP 2/1)
Table A.11 – Separation from other circuits inside enclosures
Table A.13 – Bend radius for coaxial cables outside conduit
Table A.13 – Bend radius for coaxial cables outside conduit
Table A.14 – Rarameters for silica optical fibre cables
Table A.17 – Wave length and fibre types59
Table A.18 – LED status table61
Table A.19 – Repeater adapter and module diagnostic61
Table A.20 – Repeater adapter indicator diagnostic62
Table A.21 – Repeater module indicator62
Table A.22 – Short and medium distance troubleshooting chart63
Table A.23 – Long and extra long troubleshooting chart64
Table B.1 – Network characteristics for balanced cabling based on Ethernet
Table B.2 – Network characteristics for optical fibre cabling
Table B.3 – Fibre lengths for 1 mm POF A4a.2 POF 0.5 NA
Table B.4 – Fibre lengths for 1 mm POF A4d POF 0.3 NA70
Table B.5 – Information relevant to copper cable: fixed cables71

Table B.6 – Information relevant to copper cable: cords	71
Table B.7 – TCL limits for unshielded twisted-pair cabling	72
Table B.8 – ELTCTL limits for unshielded twisted-pair cabling	72
Table B.9 – Coupling attenuation limits for screened twisted-pair cabling	72
Table B.10 – Information relevant to optical fibre cables	73
Table B.11 – Connectors for balanced cabling CPs based on Ethernet	74
Table B.12 – Industrial EtherNet/IP 8-way modular connector parameters	74
Table B.13 – Industrial EtherNet/IP M12-4 D-coding connector parameters	75
Table B.14 – Optical fibre connecting hardware	76
Table B.15 – Relationship between FOC and fibre types (CP2/2)	77
Table B.16 – Connector insertion loss	77
Table B.17 – Parameters for balanced cables) 84
Table B.18 – Parameters for silica optical fibre cables	84
Table B.19 – Parameters for POF optical fibre cables	84
Table C.1 – Basic network characteristics for copper cabling not based on Ethernet (ISO/IEC-8802-3)	96
Table C.2 – Cable trunk and drop lengths for CP 2/3	97
Table C.3 – Summary of available current for trook cables (CP)2/3)	101
Table C.4 - Permissible current for thin cable drop lines of various lengths	101
Table C.5 – Power supply specification for DeviceNet	102
Table C.6 – Power supply tolerance stack up for DeviceNet	102
Table C.7 - Current versus cable length for one power supply thick cable	105
Table C.8 - Current versus length for two power supplies	106
Table C.9 – Definition of equation variables	
Table C.10 - Information relevant to copper cable: fixed cables	111
Table C.11 – Information relevant to copper cable: cords	111
Table C.12 - DeviceNet cables and connector support cross reference	111
Table C.13 - Device Net cable profiles	112
Table C.14 - Copper connectors for non-Ethernet based fieldbus	115
Table C.15 - Additional connectors for CP 2/3 (DeviceNet)	115
Table C.16 – Parameters for balanced cables	120
Table C.17 – Wire colour code and function	126
Table C.18 – Auxiliary power cable colour code	131
Table C.19 – Network power supply requirements	132
Table C.20 – Auxillary power supply requirements	133
Table C.21 – Signal wire verification	142
Table C.22 – Shield to earth	
Table C.23 – Connector pin out	144

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and EC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC sharl not be held responsible for identifying any or all such patent rights.

International Standard IEC 61784-5-2 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

This edition includes the following technical changes with respect to the previous edition:

- updates pertaining to current installation practices;
- addition of new technology that has become recently available;
- errors have been corrected;
- improved alignment with IEC 61918.

This standard is to be used in conjunction with IEC 61918:2010.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/602/FDIS	65C/617/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61784-5 series, published under the general title Industrial communication networks – Profiles – Installation of fieldbuses, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- · reconfirmed.
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT - The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This International Standard is one of a series produced to facilitate the use of communication networks in industrial control systems.

IEC 61918:2010 provides the common requirements for the installation of communication networks in industrial control systems. This installation profile standard provides the installation profiles of the communication profiles (CP) of a specific communication profile family (CPF) by stating which requirements of IEC 61918:2010 fully apply and, where necessary, by supplementing, modifying, or replacing the other requirements (see Figure 1).

For general background on fieldbuses, their profiles, and relationship between the installation profiles specified in this standard, see IEC/TR 61158-1.

Each CP installation profile is specified in a separate annex of this standard. Each annex is structured exactly as the reference standard IEC 61918:2010 for the benefit of the persons representing the roles in the fieldbus installation process as defined in IEC 61918:2010 (planner, installer, verification personnel, validation personnel, maintenance personnel, administration personnel). By reading the installation profile in conjunction with IEC 61918:2010, these persons immediately know which requirements are common for the installation of all CPs and which are modified or replaced. The conventions used to draft this standard are defined in Clause 5.

The provision of the installation profiles in one standard for each CPF (e.g. IEC 61784-5-2 for CPF 2), allows readers to work with standards of a convenient size.

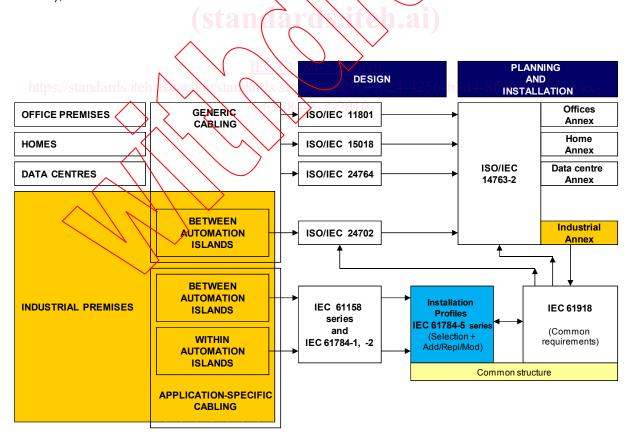


Figure 1 - Standards relationships

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2

1 Scope

This part of IEC 61784 specifies the installation profiles for CPF 2 (CIP™1).

The installation profiles are specified in the annexes. These annexes are read in conjunction with IEC 61918:2010.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61918:2010, Industrial communication networks – Installation of communication networks in industrial premises

The normative references of IEC 61918:2010, Clause 2, apply. For profile specific normative references, see Clauses A.2, B.2, and C.2.

3 Terms, definitions and abbreviated terms

For the purposes of this document, the terms, definitions and abbreviated terms of IEC 61918:2010, Clause 3, apply. For profile specific terms, definitions and abbreviated terms see Clauses A.3, B.3, and C.3.

4 CPF 2: Overview of installation profiles

CPF 2 consists of three basic communication profiles as specified in IEC 61784-1 and IEC 61784-2. These profiles share a common upper layers protocol named CIP™ (Common Industrial Protocol).

The installation requirements for CP 2/1 (ControlNet™2) are specified in Annex A.

¹ CIP™ (Common Industrial Protocol) is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this standard does not require use of the trade name CIP™. Use of the trade name CIP™ requires permission of Open DeviceNet Vendor Association, Inc.

ControlNet™ is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet™. Use of the trade name ControlNet™ requires permission of ControlNet International, Ltd.

The installation requirements for CP 2/2 (EtherNet/IP™3) are specified in Annex B.

The installation requirements for CP 2/3 (DeviceNet[™] 4) are specified in Annex C.

5 Installation profile conventions

The numbering of the clauses and subclauses in the annexes of this standard corresponds to the numbering of IEC 61918 main clauses and subclauses.

The annex clauses and subclauses of this standard supplement, modify, or replace the respective clauses and subclauses in IEC 61918.

Where there is no corresponding subclause of IEC 61918 in the normative annexes in this standard, the subclause of IEC 61918 applies without modification.

The annex heading letter represents the installation profile assigned in Clause 4. The annex (sub)clause numbering following the annex letter shall represent the corresponding (sub)clause numbering of IEC 61918.

EXAMPLE "Annex B.4.4" in IEC 61784-5-2 means that CP 2/2 specifies the Subclause 4.4 of IEC 61918.

All main clauses of IEC 61918 are cited and apply in full unless otherwise stated in each normative installation profile annex.

If all subclauses of a (sub)clause are omitted, then the corresponding IEC 61918 (sub)clause applies.

If in a (sub)clause it is written "Not applicable", then the corresponding IEC 61918 (sub)clause does not apply.

If in a (sub)clause it is written "Addition." then the corresponding IEC 61918 (sub)clause applies with the additions written in the profile.

If in a (sub)clause it is written "Replacement:", then the text provided in the profile replaces the text of the corresponding IEC 61918 (sub)clause.

NOTE A replacement can also comprise additions.

If in a (sub)clause it is written "Modification:", then the corresponding IEC 61918 (sub)clause applies with the modifications written in the profile.

If all (sub)clauses of a (sub)clause are omitted but in this (sub)clause it is written "(sub)clause \times has "addition:" (or "replacement:", or "modification:") or "(Sub)clause \times is not applicable.", then (sub)clause \times becomes valid as declared and all the other corresponding IEC 61918 (sub)clauses apply.

³ EtherNet/IP™ is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP™. Use of the trade name EtherNet/IP™ requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.

DeviceNet™ is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this standard does not require use of the trade name DeviceNet™. Use of the trade name DeviceNet™ requires permission of Open DeviceNet Vendor Association, Inc.

6 Conformance to installation profiles

Each installation profile within this standard includes part of IEC 61918:2010. It may also include defined additional specifications.

A statement of compliance to an installation profile of this standard shall be stated⁵ as either

Compliance to IEC 61784-5-2:20106 for CP 2/n <name> or

Compliance to IEC 61784-5-2 (Ed.2.0) for CP 2/n <name>

where the name within the angle brackets < > is optional and the angle brackets are not to be included. The n within CP 2/n shall be replaced by the profile number 1 to 3.

NOTE The name may be the name of the profile, e.g. ControlNet, EtherNet/IP or DeviceNet.

If the name is a trade name then the permission of the trade name holder shall be required.

Product standards shall not include any conformity assessment aspects (including quality management provisions), neither normative nor informative other than provisions for product testing (evaluation and examination).



⁵ In accordance with ISO/IEC Directives.

⁶ The date should not be used when the edition number is used.

Annex A

(normative)

CP 2/1 (ControlNet™) specific installation profile

A.1 Installation profile scope

Addition:

This standard specifies the installation profile for Communication Profile CP 2/1 (ControlNet). The CP 2/1 is specified in IEC 61784-1.

A.2 Normative references

Addition:

IEC 60096-2:1961, Radio-frequency cables - Part 2: Relevant cable specifications

A.3 Installation profile terms, definitions, and abbreviated terms

A.3.1 Terms and definitions

A.3.2 Abbreviated terms

Addition:

DVM Digital voltmeter Standar Digital voltmeter Digital voltmeter

I/O Input/Output
IS Intrinsic Safe
MM Multi mode

NAP Network access port (local access to a device, i.e. not via the bus)

OTDR Optical time domain reflectometer
PLC Programable logic controller

PVC Polyvinyl chloride
RG6 Coaxial cable
SM Single mode

TDR Time domain reflectometer

A.3.3 Conventions for installation profiles

Not applicable.