



SLOVENSKI STANDARD SIST EN 2997-4:2001

01-januar-2001

Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175°C continuous, 200°C continuous, 260°C peak - Part 4: Jam-nut mounted receptacle - Product standard

Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175°C continuous, 200°C continuous, 260°C peak - Part 4: Jam-nut mounted receptacle - Product standard

iTeh STANDARD PREVIEW

Luft- und Raumfahrt - Elektrische Rundsteckverbinder mit Schraubkupplung, feuerbeständig oder nicht feuerbeständig, Betriebstemperaturen 175°C konstant, 200°C konstant, 260°C Spitze - Teil 4: Fester Steckverbinder mit Mutterbefestigung - Produktnorm

[SIST EN 2997-4:2001](https://standards.iteh.ai/catalog/standards/sist/e6bb10f2-4955-494d-b7cc-00f224a49006/sist-en-2997-4-2001)

<https://standards.iteh.ai/catalog/standards/sist/e6bb10f2-4955-494d-b7cc-00f224a49006/sist-en-2997-4-2001>

Série aérospatiale - Connecteurs électriques circulaires a accouplement par bague filetée, résistant au feu ou non, températures d'utilisation 175°C continu, 200°C continu, 260°C en pointe - Partie 4: Embase a fixation par écrou - Norme de produit

Ta slovenski standard je istoveten z: EN 2997-4:1997

ICS:

49.060 Ščē\ æā Ą^•[|b\ æ Aerospace electric
^|\ dā} æā]!^{\ æā Ą c\ ā equipment and systems

SIST EN 2997-4:2001 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 2997-4:2001

<https://standards.iteh.ai/catalog/standards/sist/e6bb10f2-4955-494d-b7cc-00f224a49006/sist-en-2997-4-2001>

EUROPEAN STANDARD

EN 2997-4

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 1997

ICS 49.060

Descriptors: aircraft industry, connecting equipment, electric connectors, fixing, nuts : fasteners, bed plates, specifications

English version

**Aerospace series - Connectors, electrical, circular,
coupled by threaded ring, fire-resistant or non
fire-resistant, operating temperatures 175°C
continuous, 200°C continuous, 260°C peak -
Part 4: Jam-nut mounted receptacle - Product
standard**

Série aéronautique - Connecteurs électriques
circulaires à accouplement par bague filetée,
résistant au feu ou non, températures
d'utilisation 175°C continu, 200°C continu,
260°C en pointe - Partie 4: Embase à fixation
par écrou - Norme de produit

Luft- und Raumfahrt - Elektrische
Rundsteckverbinder mit Schraubkupplung,
feuerbeständig oder nicht feuerbeständig,
Betriebstemperaturen 175°C konstant, 200°C
konstant, 260°C Spitze - Teil 4: Fester
Steckverbinder mit Mutterbefestigung -
Produktnorm

SIST EN 2997-4:2001

<https://standards.iteh.ai/catalog/standards/sist/e6bb10f2-4955-494d-b7cc-00f224a49006/sist-en-2997-4-2001>

This European Standard was approved by CEN on 1996-08-04. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 1997, and conflicting national standards shall be withdrawn at the latest by December 1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

<https://standards.cen.eu/standards-base/055-494d-b7cc-00f224ad9086/sist-en-2997-4-2001>

ALPHA SIST EN 2997-4:2001
EN 2997-4:2001
00f224ad9086/sist-en-2997-4-2001
CYCLOPS
AVAILABILITY

.....T010
SYMBOLS AND NOTATION

1 Scope

This standard specifies the characteristics of jam-nut mounted receptacles in the family of circular electrical connectors coupled by threaded ring.

It applies to the models defined in table 5.

For contacts, filler plugs and rear accessories associated with this receptacle, see EN 2997-002. For plugs and protective covers, see EN 2997-008 and EN 2997-009 respectively.

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- EN 2997-001 Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175 °C continuous, 200 °C continuous, 260 °C peak - Part 001 : Technical specification ¹⁾
- EN 2997-002 Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175 °C continuous, 200 °C continuous, 260 °C peak - Part 002 : Specification of performance and contact arrangements ¹⁾
- EN 2997-008 Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175 °C continuous, 200 °C continuous, 260 °C peak - Part 008 : Plug - Product standard ¹⁾
- EN 2997-009 Aerospace series - Connectors, electrical, circular, coupled by threaded ring, fire-resistant or non fire-resistant, operating temperatures 175 °C continuous, 200 °C continuous, 260 °C peak - Part 009 : Protective cover for receptacle - Product standard ¹⁾
- EN 3155-002 Aerospace series - Electrical contacts used in elements of connection - Part 002 : List and utilization of contacts ¹⁾
- FED-STD-H28 : 1978 Screw-thread standards for federal services ²⁾

3 Terminology

See EN 2997-001.

1) Published as AECMA Prestandard at the date of publication of this standard

2) Published by : Department of Defense (DOD), the Pentagon, Washington, D.C. 20301 USA

4 Required characteristics

4.1 Dimensions, mass

See figure 1 and table 1.

Dimensions are in millimeters ; they apply after surface treatment.

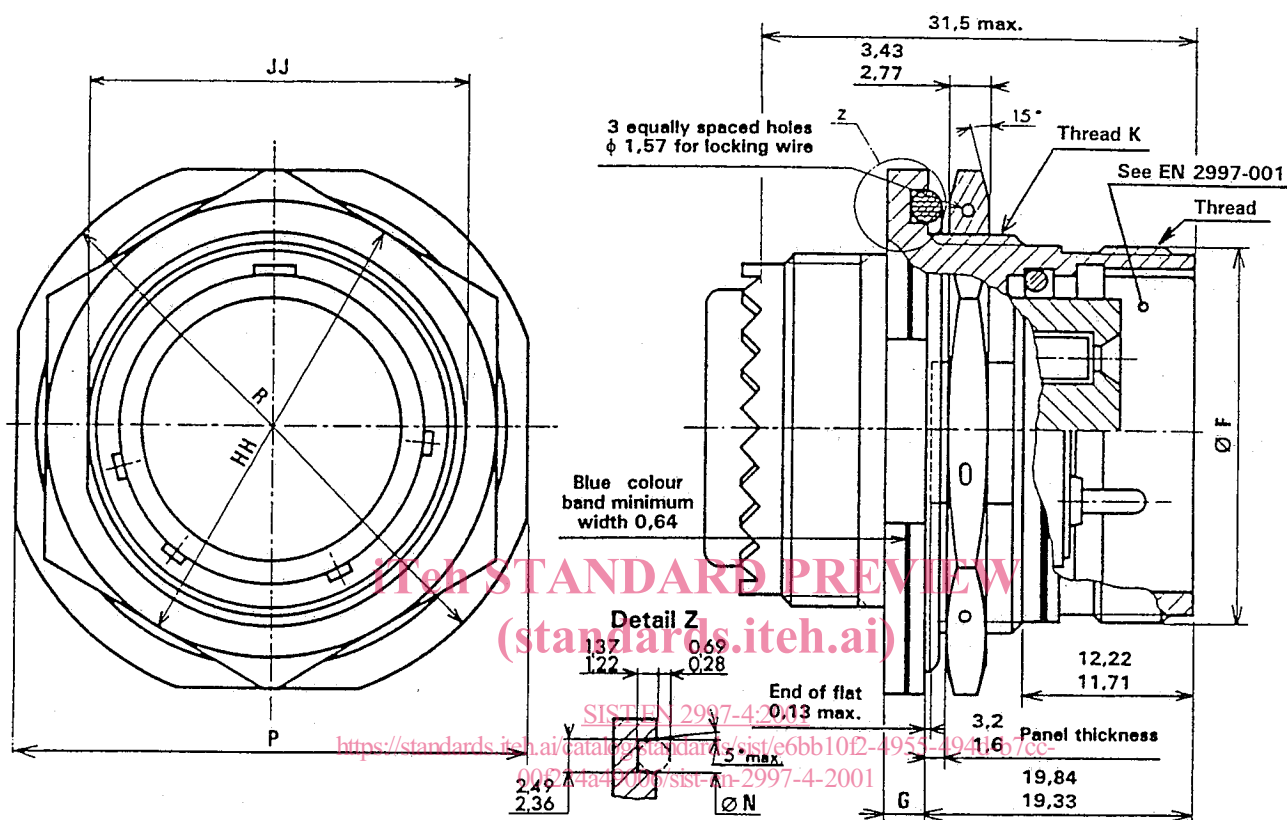


Figure 1

Table 1

Housing size	F max.	G	K Thread class 2A ¹⁾	N	P	R	HH	JJ	Mass g ²⁾ max.	
									Stainless steel	Aluminium alloy
08	14,27	3,48 2,46	0,6250-20UN	17,02 16,92	24,89 24,10	27,38 26,59	21,06 20,19	15,14 14,99	32	15
10	17,67	3,48 2,46	0,7500-20UNEF	20,22 20,12	28,04 27,25	30,28 29,49	24,23 23,37	18,31 18,16	41	21
12	22,22	3,48 2,46	0,9375-20UNEF	24,99 24,89	32,79 32,00	35,05 34,26	29,01 28,14	23,06 22,91	58	30
14	23,77	3,48 2,46	1,0000-20UNEF	26,57 26,47	35,33 34,54	38,51 37,72	30,61 29,74	24,66 24,51	68	35
16	26,97	3,48 2,46	1,1250-18UNEF	29,74 29,64	38,51 37,72	41,68 40,89	33,76 32,89	27,84 27,69	82	46
18	30,15	3,48 2,46	1,2500-18UNEF	32,92 32,82	41,68 40,89	44,86 44,07	36,96 36,09	30,99 30,84	88	51
20	33,32	3,48 2,46	1,3750-18UNEF	37,64 37,54	44,86 44,07	49,63 48,84	40,11 39,24	34,16 34,01	100	56
22	36,49	3,76 3,25	1,5000-18UNEF	40,87 40,77	49,63 48,84	52,78 51,99	43,31 42,44	37,34 37,19	123	69
24	39,67	3,76 3,25	1,6250-18UNEF	43,99 43,89	52,81 52,02	55,42 54,66	46,46 45,59	40,51 40,36	137	82
28	46,02	3,76 3,25	1,8750-16UN	50,39 50,29	59,21 58,42	61,82 61,04	54,41 53,54	46,78 46,63	191	120

1) FED-STD-H28

2) Mass without accessory and without contact

4.2 Tightening torque of attachment nut

See table 2.

Table 2

Housing size	Torque in N.m \pm 10 %
08	7
10	10
12	12
14	15
16	18
18	22
20	25
22	27
24	29
28	30

4.3 Panel cut-out

See figure 2 and table 3.
Dimensions are in millimeters.

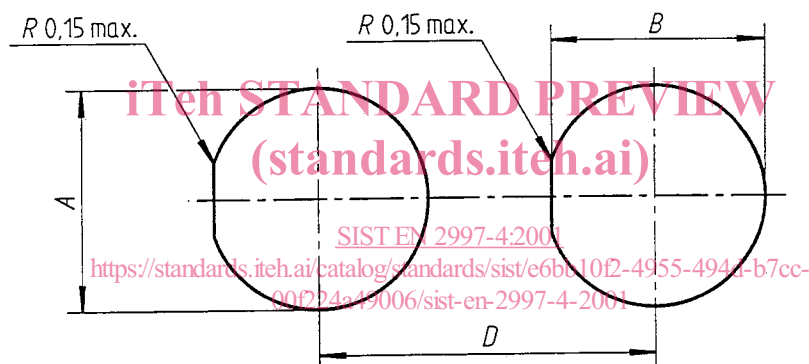


Figure 2

Table 3

Housing size	A	B	D min.
08	16,26	15,50	31,70
	16,00	15,24	
10	19,43	18,67	34,90
	19,17	18,41	
12	24,18	23,42	39,60
	23,92	23,16	
14	25,78	25,02	41,25
	25,52	24,76	
16	28,96	28,20	44,45
	28,70	27,94	
18	32,13	31,25	47,35
	31,87	30,99	
20	35,31	34,42	51,90
	35,05	34,16	
22	38,48	37,59	54,10
	38,22	37,33	
24	41,66	40,77	57,25
	41,40	40,51	
28	48,01	47,14	65,25
	47,75	46,88	

4.4 Material, surface treatment

See table 5.

4.5 Main general characteristics

See EN 2997-002.

4.6 Possible combinations of plugs and receptacles


See table 4.

Table 4

Receptacles	S	SE	WS	RS
Plugs	K or S	KE or SE	W or WS	R or RS

5 Designation

EXAMPLE :

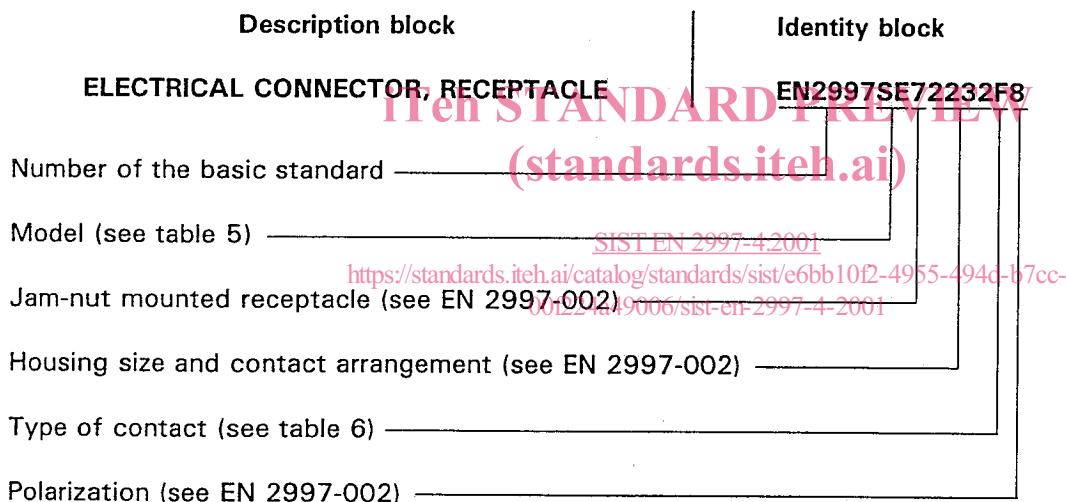

NOTE : If necessary, the code I9005 shall be placed between the description block and the identity block.

Table 5 : Connector models

Models	Description
WS	Sealed receptacle with housing (shell) in olive-green, cadmium-plated aluminium alloy, conducting finish, 500 h resistance to salt mist, crimp contacts, maximum operating temperature 175 °C continuous
RS	Sealed receptacle with housing (shell) in nickel-plated aluminium alloy, crimp contacts, maximum operating temperature 200 °C continuous
S	Sealed receptacle with housing (shell) in passivated stainless steel, crimp contacts, fire-resistant, maximum operating temperature 200 °C continuous
SE	Sealed receptacle with housing (shell) in passivated stainless steel, crimp contacts, fire-resistant, maximum operating temperature 260 °C peak