

# INTERNATIONAL STANDARD

**Multicore and symmetrical pair/quad cables for digital communications –  
Part 6: Symmetrical pair/quad cables with transmission characteristics up to  
1 000 MHz – Work area wiring – Sectional specification**

IEC 61156-6:2010

<https://standards.iteh.ai/en/standards/iec/61156-6:2010>



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.


- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

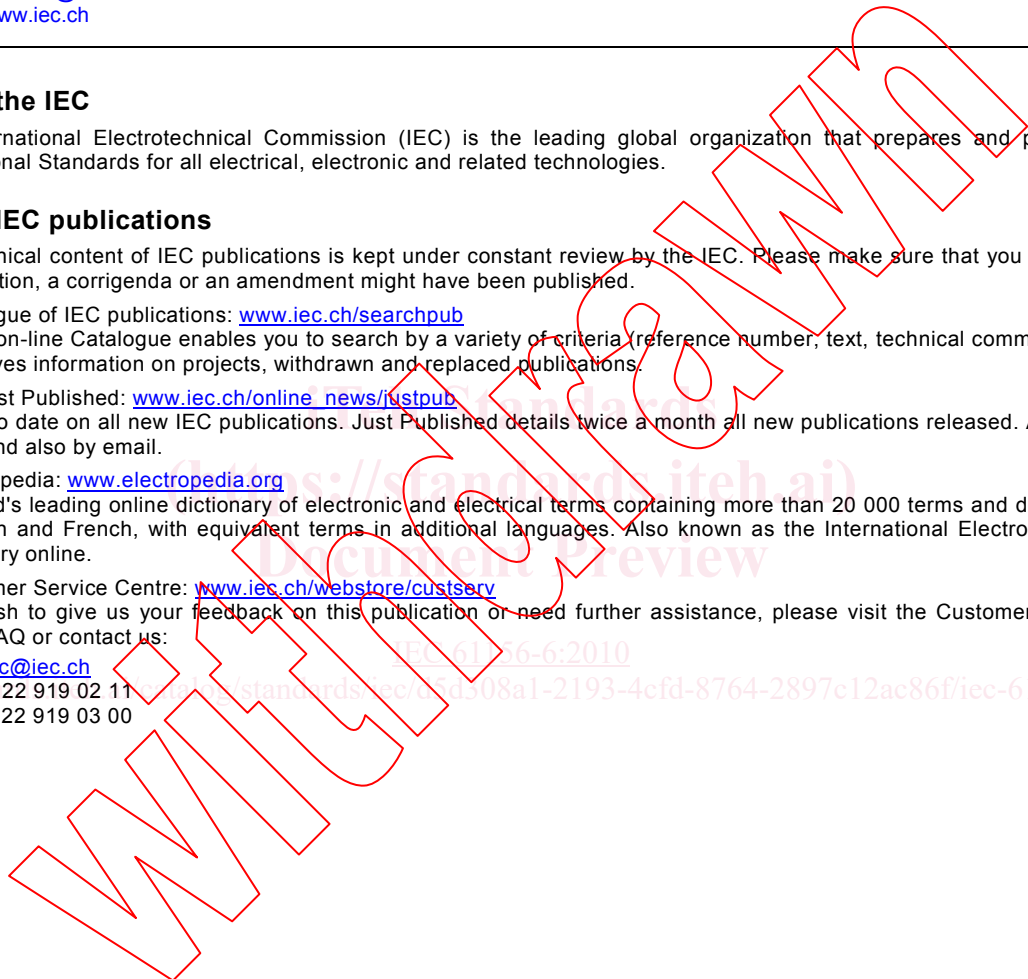

<https://standards.iteh.ai/document/iec/61156-6-2010>  
<https://standards.iteh.ai/document/iec/61156-6-2010>

# INTERNATIONAL STANDARD

**Multicore and symmetrical pair/quad cables for digital communications –  
Part 6: Symmetrical pair/quad cables with transmission characteristics up to  
1 000 MHz – Work area wiring – Sectional specification**

<https://standards.iteh.ai/en/standards/iec/61156-6:2010>

<https://standards.iteh.ai/en/standards/iec/61156-6:2010>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

R

ICS 33.120.20

ISBN 978-2-88910-426-0

## CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references .....	6
3 Terms and definitions .....	7
4 Installation considerations .....	7
4.1 Climatic conditions .....	7
5 Materials and cable construction .....	7
5.1 General remarks.....	7
5.2 Cable construction .....	7
5.2.1 Conductor.....	7
5.2.2 Insulation.....	7
5.2.3 Cable element .....	7
5.2.4 Cable make-up .....	8
5.2.5 Screening of the cable core .....	8
5.2.6 Sheath.....	8
5.2.7 Identification.....	8
6 Characteristics and requirements .....	8
6.1 General remarks.....	8
6.2 Electrical characteristics and tests .....	9
6.2.1 Conductor resistance.....	9
6.2.2 Resistance unbalance .....	9
6.2.3 Dielectric strength .....	9
6.2.4 Insulation resistance.....	9
6.2.5 Mutual capacitance.....	9
6.2.6 Capacitance unbalance .....	9
6.2.7 Transfer impedance.....	9
6.2.8 Coupling attenuation.....	10
6.2.9 Current-carrying capacity.....	10
6.3 Transmission characteristics .....	10
6.3.1 Velocity of propagation (phase velocity) .....	10
6.3.2 Phase delay and differential delay (delay skew) .....	10
6.3.3 Attenuation.....	11
6.3.4 Unbalance attenuation.....	11
6.3.5 Near-end crosstalk ( <i>NEXT</i> ).....	12
6.3.6 Attenuation to crosstalk ratio far end ( <i>PS ACR-F</i> ) .....	12
6.3.7 Alien (exogenous) near end crosstalk .....	13
6.3.8 Alien (exogenous) far-end crosstalk ( <i>AACR-F</i> ) .....	13
6.3.9 Alien (exogenous) crosstalk of bundled cables .....	14
6.3.10 Impedance.....	14
6.3.11 Return loss ( <i>RL</i> ) .....	15
6.4 Mechanical and dimensional characteristics and requirements .....	15
6.4.1 Dimensional requirements .....	15
6.4.2 Elongation at break of the conductors.....	15
6.4.3 Tensile strength of the insulation .....	16
6.4.4 Elongation at break of the insulation.....	16
6.4.5 Adhesion of the insulation to the conductor .....	16

6.4.6	Elongation at break of the sheath .....	16
6.4.7	Tensile strength of the sheath .....	16
6.4.8	Crush test of the cable .....	16
6.4.9	Impact test of the cable .....	16
6.4.10	Bending under tension.....	16
6.4.11	Repeated bending of the cable .....	16
6.4.12	Tensile performance of the cable.....	16
6.4.13	Shock-test requirements of the cable.....	16
6.4.14	Bump-test requirements of the cable .....	16
6.4.15	Vibration-test requirements of a cable .....	16
6.5	Environmental characteristics.....	17
6.5.1	Shrinkage of the insulation .....	17
6.5.2	Wrapping test of the insulation after thermal ageing .....	17
6.5.3	Bending test of the insulation at low temperature.....	17
6.5.4	Elongation at break of the sheath after ageing.....	17
6.5.5	Tensile strength of the sheath after ageing .....	17
6.5.6	Sheath pressure test at high temperature.....	17
6.5.7	Cold bend test of the cable .....	17
6.5.8	Heat shock test.....	17
6.5.9	Damp heat steady state.....	17
6.5.10	Solar radiation .....	17
6.5.11	Solvents and contaminating fluids.....	17
6.5.12	Salt mist and sulphur dioxide.....	17
6.5.13	Water immersion.....	18
6.5.14	Hygroscopicity.....	18
6.5.15	Wicking .....	18
6.5.16	Flame propagation characteristics of a single cable.....	18
6.5.17	Flame propagation characteristics of bunched cables.....	18
6.5.18	Halogen gas evolution .....	18
6.5.19	Smoke generation .....	18
6.5.20	Toxic gas emission.....	18
6.5.21	Integrated fire test .....	18
7	Introduction to the blank detail specification .....	19
	Bibliography.....	20
	Figure 1 – Impedance template.....	15
	Table 1 – Cable categories .....	6
	Table 2 – Transfer impedance .....	10
	Table 3 – Coupling attenuation .....	10
	Table 4 – Attenuation, constant values .....	11
	Table 5 – Near-end unbalance attenuation.....	12
	Table 6 – Worst pair <i>PS NEXT</i> values .....	12
	Table 7 – Worst pair <i>PS ACR-F</i> .....	13
	Table 8 – <i>PS ANEXT</i> .....	13
	Table 9 – <i>PS AACR-F (PS AELFEXT)</i> .....	14
	Table 10 – Return loss.....	15

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

---

## MULTICORE AND SYMMETRICAL PAIR/QUAD CABLES FOR DIGITAL COMMUNICATIONS –

### Part 6: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz – Work area wiring – Sectional specification

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61156-6 has been prepared by subcommittee 46C: Wires and symmetric cables, of IEC technical committee 46: Cables, wires, waveguides, r.f. connectors, r.f. and microwave passive components and accessories.

This third edition cancels and replaces the second edition published in 2007. This third edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) new requirements for new cables Cat6<sub>A</sub>, Cat7<sub>A</sub>;
- b) revised requirements and tests for the cables.

The text of this standard is based on the following documents:

FDIS	Report on voting
46C/903/FDIS	46C/908/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This standard shall be read in conjunction with IEC 61156-1:2007.

The list of all the parts of the IEC 61156 series, under the general title: *Multicore and symmetrical pair/quad cables for digital communications*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

## MULTICORE AND SYMMETRICAL PAIR/QUAD CABLES FOR DIGITAL COMMUNICATIONS –

### Part 6: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz – Work area wiring – Sectional specification

#### 1 Scope

This part of IEC 61156 makes reference to IEC 61156-1. The cables described herein are intended primarily for work area wiring as defined in ISO/IEC 11801 and ISO/IEC 24702.

It covers individually screened, common screened and unscreened pairs or quads. The transmission characteristics and the frequency range (see Table 1) of the cables are specified at 20 °C.

**Table 1 – Cable categories**

Cable designation	Maximum referenced frequency MHz
Category 5e	100
Category 6	250
Category 6 <sub>A</sub>	500
Category 7	600
Category 7 <sub>A</sub>	1 000

These cables can be used for various communication channels which use as many as four pairs simultaneously. In this sense, this sectional specification provides the cable characteristics required by system developers to evaluate new systems.

The cables covered by this standard are intended to operate with voltages and currents normally encountered in communication systems. These cables are not intended to be used in conjunction with low impedance sources, for example the electric power supplies of public utility mains, they are intended to be used to support the delivery of low voltage and power applications such as IEEE's 802.3af (Power over Ethernet) and 802.3at (Power over Ethernet Plus).

#### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61156-1:2007, *Multicore and symmetrical pair/quad cables for digital communications – Part 1: Generic specification*

IEC 61156-6-1, *Multicore and symmetrical pair/quad cables for digital communications – Part 6-1: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz – Work area wiring – Blank detail specification*



IEC 62153-4-9, *Metallic communication cable test methods – Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of screened balanced cables, triaxial method*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61156-1 apply.

### 4 Installation considerations

See Clause 4 of IEC 61156-1.

#### 4.1 Climatic conditions

Under static conditions, the cables shall operate in the temperature range from  $-20\text{ °C}$  to  $+60\text{ °C}$ . The conductor and cable temperature dependence is specified for screened and unscreened cables and should be taken into account for the design of an actual cabling system.

### 5 Materials and cable construction

#### 5.1 General remarks

The choice of materials and cable construction shall be suitable for the intended application and installation of the cable. Particular care shall be taken to meet any special requirements for EMC and fire performance (such as burning properties, smoke generation, evolution of halogen gas, etc.).

#### 5.2 Cable construction

The cable construction shall be in accordance with the details and dimensions given in the relevant detail specification.

##### 5.2.1 Conductor

The conductor shall be a solid or stranded annealed copper, in accordance with 5.2.1 of IEC 61156-1 and should have a nominal diameter between 0,4 mm and 0,65 mm. A conductor diameter of up to 0,8 mm may be used.

##### 5.2.2 Insulation

The conductor shall be insulated with a suitable material. Examples of suitable materials are

- polyolefin;
- fluoropolymer;
- low-smoke zero-halogen thermoplastic material.

##### 5.2.3 Cable element

The cable element shall be a pair or quad and shall be twisted.

###### 5.2.3.1 Screening of the cable element

When required, the screen for the cable element shall be in accordance with 5.2.3.1 of IEC 61156-1.

#### 5.2.4 Cable make-up

A spacer may be used to separate the cable elements. The cable elements, including spacers, shall be assembled to form the cable core.

The core of the cable may be wrapped with a protective layer of non-hygroscopic and non-wicking material.

#### 5.2.5 Screening of the cable core

When required by the relevant detail specification, a screen for the cable core shall be provided.

The screen shall be in accordance with 5.2.5 of IEC 61156-1.

#### 5.2.6 Sheath

The sheath material shall consist of a suitable material.

Examples of suitable materials are

- polyolefin;
- PVC;
- fluoropolymer;
- low-smoke zero-halogen thermoplastic material.

The sheath shall be continuous, having a thickness as uniform as possible. A non-metallic ripcord may be provided. When provided, the ripcord shall be non-hygroscopic and non-wicking.

The colour of the sheath is not specified but it should be specified in the relevant detail specification.

#### 5.2.7 Identification

Each length of cable shall be identified as to the supplier and, when required, a traceability code, using one of the following methods:

- appropriately coloured threads or tapes,
- with a printed tape,
- printing on the cable core wrapping,
- marking on the sheath.

Additional markings, such as length marking, etc., are permitted. If used, such markings shall refer to this specification.

The finished cable shall be adequately protected for storage and shipment.

## 6 Characteristics and requirements

### 6.1 General remarks

This clause lists the characteristics and minimum requirements of a cable complying with this standard. Test methods shall be in accordance with Clause 6 of IEC 61156-1.