

INTERNATIONAL STANDARD

ISO
9193

First edition
1990-09-01

Lawn and garden ride-on (riding) tractors — Power take-off

iTeh STANDARD PREVIEW

Tracteurs de jardin et de pelouse à conducteur porté — Prise de force
(standards.iteh.ai)

ISO 9193:1990

<https://standards.iteh.ai/catalog/standards/sist/41e39880-ec0e-49e4-a87b-4ea834897a59/iso-9193-1990>



Reference number
ISO 9193:1990(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

International Standard ISO 9193 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*.

Annex A of this International Standard is for information only.

<https://standards.iteh.ai/catalog/standards/sist/41e39880-cc0e-49e4-a87b-4ea834897a59/iso-9193-1990>

Lawn and garden ride-on (riding) tractors — Power take-off

1 Scope

This International Standard specifies the requirements for an internally splined (tube) rear-mounted 2 000 r/min power take-off (PTO) on lawn and garden ride-on (riding) tractors.

For the purposes of this International Standard, a lawn and garden ride-on (riding) tractor is a self-propelled machine on which an operator rides and which is primarily designed for cutting grass and auxiliary garden work. The cutting means may either be an integral part of the machine, or an implement or attachment suspended from or attached to the machine. An attachment is an assembly or component that may be connected to a lawn and garden ride-on tractor for the purposes of accomplishing work.

The requirements specified for the PTO are essential to ensure that a 2 000 r/min PTO-driven machine or implement/attachment can be operated with a lawn and garden tractor equipped with an equivalent size 2 000 r/min PTO drive. Hitch reference dimensions also ensure that mounted and towed powered implements/attachments designed for operation in conjunction with lawn and garden tractors can be operated by those lawn and garden tractors designed for such implements/attachments.

2 Power take-off requirements

2.1 General

The general characteristics of the PTO shall be as follows:

- a) nominal diameter: 26 mm;
- b) number and type of splines: 15 involute splines;
- c) nominal PTO rotational frequency: 2 000 r/min;

- d) PTO maximum power at rated rotational frequency of engine: 20 kW.

2.2 Manufacturing requirements

2.2.1 The power take-off tube for PTO drives extending from the tractor to the rear shall have the internal spline dimensions shown in table 1.

2.2.2 The power take-off shafts for PTO drives extending from the attachment forward shall have the spline dimensions shown in table 1.

2.2.3 The normal rotational frequency of the rear PTO tube, when operating at rated engine speed, shall be 2 000 r/min \pm 50 r/min.

2.3 Direction of rotation

The direction of rotation of the PTO shall be clockwise viewed from the end of the tractor PTO shaft (tube).

2.4 PTO retaining means

The PTO tube (internal spline) and shaft retaining means shall have the dimensions shown in figure 1.

The rotational frequency and direction of rotation shall be indicated on the guard and/or near the PTO tube.

3 Location of PTO

3.1 It is recommended that the tractor PTO tube should be on the tractor centreline; it shall in any case be within the limits of 25 mm to the right or left of the tractor centreline.

3.2 The vertical distance between the centreline of the spline tube of the PTO and the ground line shall be a minimum of 350 mm to a maximum of 480 mm (see y in figure 2 and table 2).

Table 1 — Power take-off tube and shaft spline dimensions

| Flat root side fit | Tractor tube (internal spline) | Attachment shaft (external spline) |
|---|--------------------------------|------------------------------------|
| Number of teeth | 15 | 15 |
| Pitch | 16/32 | 16/32 |
| Pressure angle | 30° | 30° |
| Base diameter | 20,622 23 mm | 20,622 23 mm |
| Pitch diameter | 23,812 mm | 23,812 mm |
| Major diameter | 26,06 mm max. | 25,4 mm or 24,84 mm |
| Form diameter | 25,5 mm | 22,15 mm |
| Minor diameter | 22,4 mm or 22,28 mm | 21,34 mm min. |
| Circular space width (tolerance class 6): | | |
| — maximum (actual) | 2,563 mm | — |
| — minimum (effective) | 2,494 mm | — |
| Circular tooth thickness: | | |
| — maximum (effective) | — | 2,456 mm |
| — minimum (actual) | — | 2,388 mm |
| Measurement over pins | — | 28,19 mm ref. |
| Pin diameter | — | 3,05 mm |
| Measurement between pins | 19,807 mm ref. | — |
| Pin diameter | 2,743 mm | — |

iTech STANDARD PREVIEW
(standards.iteh.ai)

ISO 9193:1990
<https://standards.iteh.ai/catalog/standards/sist/41e39880-cc0e-49e4-a87b-4ea834897a59/iso-9193-1990>

4 Relationship of PTO location to three-point hitch

The dimensional relationship between the PTO splined tube and the category 0 three-point hitch shall be as given in table 2 and figure 2.



5 PTO guard

5.1 The tractor shall be equipped with a PTO master guard with dimensions which conform to figure 1.

5.2 Although not intended as a step, the master guard shall not be permanently deformed if used as a step by a 120 kg operator.

5.3 If removal of the master guard is required for integral PTO-driven attachments, shielding shall be provided with the implement to provide protection as specified in 5.1 and 5.2.

5.4 The master guard shall not be removable without the use of tools.

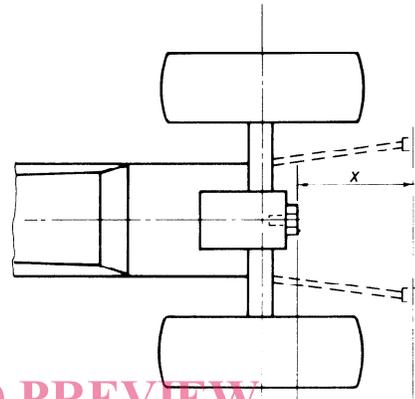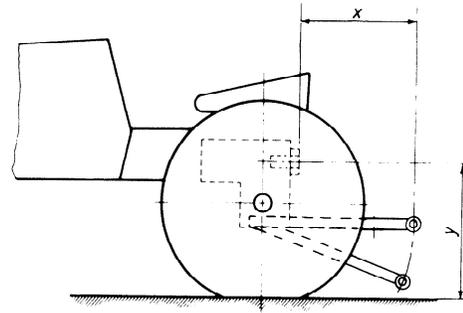

6 Implements/attachments

6.1 All implements/attachments shall be capable of operating at 10 % over the normal rotational frequency of 2 000 r/min. In addition, tractors shall be equipped with means to prevent the operator from inadvertently operating the PTO tube at more than 2 300 r/min under no-load conditions.

6.2 The PTO clutch on the tractor shall be independent of the traction clutch.

6.3 Any power take-off shaft, including its connectors, fasteners and any torque-limiting device, shall be enclosed or otherwise safeguarded from the power take-off up to the first fixed bearing, to prevent contact with revolving parts.

iTeh STANDARD PREVIEW
(standards.iTeh.ai)

Figure 2 — Relationship of tractor PTO and category 0 lift links

Table 2 — Dimensional relationships of tractor PTO and category 0 lift links

Dimensions in millimetres

| Distance | Dimension | |
|---|-----------|------|
| | min. | max. |
| x horizontal distance from PTO splined tube to lower hitch point (with lower link horizontal) | 250 | 350 |
| y vertical position of PTO splined tube above GRP | 350 | 480 |

Annex A (informative)

Bibliography

- [1] ISO 4254-1:1989, *Tractors and machinery for agriculture and forestry — Technical means for ensuring safety — Part 1: General.* *mowing attachments — Definitions, safety requirements and test procedures.*
- [2] ISO 5395:1990¹⁾, *Power lawn mowers, lawn tractors, lawn and garden tractors, professional mowers, and lawn and garden tractors with*
- [3] ISO 9190:1990¹⁾, *Lawn and garden ride-on (riding) tractors — Drawbar.*
- [4] ISO 9191:1990¹⁾, *Lawn and garden ride-on (riding) tractors — Three-point hitch.*

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 9193:1990

<https://standards.iteh.ai/catalog/standards/sist/41e39880-ec0e-49e4-a87b-4ea834897a59/iso-9193-1990>

1) To be published.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 9193:1990

<https://standards.iteh.ai/catalog/standards/sist/41e39880-ec0e-49e4-a87b-4ea834897a59/iso-9193-1990>

UDC 631.372:629.114.2-494

Descriptors: horticultural machinery, power horticultural machinery, lawn mowers, agricultural tractors, power take-off, specifications, dimensions.

Price based on 5 pages
