
Aeronavtika - Matice, šestrobe, drsne, z normalnim zevom ključa, iz jekla, kadmirane, levi navoj - Klasifikacija: 1100 MPa (pri temperaturi okolice)/235 °C

Aerospace series - Nuts, hexagonal, plain, normal height, normal across flats, in steel, cadmium plated, left hand thread - Classification: 1100 MPa (at ambient temperature)/235 °C

Luft- und Raumfahrt - Sechskantmuttern mit normaler Schlüsselweite, aus Stahl, verkadmet, Linksgewinde - Klasse: 1100 MPa (bei Raumtemperatur)/235 °C

Série aéronautique - Écrous hexagonaux ordinaires, hauteur normale, surplats normaux, en acier, cadmiés, filetage à gauche - Classification: 1100 MPa (à température ambiante)/235 °C

Ta slovenski standard je istoveten z: EN 3227:2010

ICS:

49.030.30 Matice Nuts

SIST EN 3227:2010 **en,de**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3227:2010

<https://standards.iteh.ai/catalog/standards/sist/f7508791-eb67-4d72-8043-0c223c7bfe86/sist-en-3227-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3227

February 2010

ICS 49.030.30

English Version

**Aerospace series - Nuts, hexagonal, plain, normal height,
normal across flats, in steel, cadmium plated, left hand thread -
Classification: 1 100 MPa (at ambient temperature) / 235 °C**

Série aérospatiale - Écrous hexagonaux ordinaires, hauteur normale, surplats normaux, en acier, cadmiés, filetage à gauche - Classification : 1 100 MPa (à température ambiante) / 235 °C

Luft- und Raumfahrt - Sechskantmuttern mit normaler Schlüsselweite, aus Stahl, verkadmet, Linksgewinde - Klasse: 1 100 MPa (bei Raumtemperatur) / 235 °C

This European Standard was approved by CEN on 11 December 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics	5
4 Designation	7
5 Marking	8
6 Technical specification	8

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 3227:2010

<https://standards.iteh.ai/catalog/standards/sist/f7508791-eb67-4d72-8043-0c223c7bfe86/sist-en-3227-2010>

Foreword

This document (EN 3227:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2010, and conflicting national standards shall be withdrawn at the latest by August 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3227:2010

<https://standards.iteh.ai/catalog/standards/sist/f7508791-eb67-4d72-8043-0c223c7bf86/sist-en-3227-2010>

EN 3227:2010 (E)

1 Scope

This standard specifies the characteristics of plain, hexagonal nuts, normal height, normal across flats, with left hand thread, in steel, cadmium plated.

Classification : 1 100 MPa ¹⁾ / 235 °C ²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2133, *Aerospace series — Cadmium plating of steels with specified tensile strength $\leq 1\,450$ MPa, copper, copper alloys and nickel alloys*

EN 2205, *Aerospace series — Steel FE-PL1502 (25CrMo4) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2438, *Aerospace series — Steel FE-PL2102 (35NiCr6) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 2448, *Aerospace series — Steel FE-PL1503 (35CrMo4) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 3513, *Aerospace series — Steel FE-PL711 — Hardened and tempered — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bar and wire — $D_e \leq 45\text{ mm}$ ³⁾*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defense Organizations*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 8279, *Aerospace — Nuts, hexagonal, plain, normal height, normal across flats, with MJ threads, classifications: 600 MPa (at ambient temperature)/120 °C, 600 MPa (at ambient temperature)/235 °C, 900 MPa (at ambient temperature)/425 °C, 1 100 MPa (at ambient temperature)/235 °C, 1 100 MPa (at ambient temperature)/315 °C, 1 100 MPa (at ambient temperature)/650 °C, 1 210 MPa (at ambient temperature)/730 °C, 1 250 MPa (at ambient temperature)/235 °C and 1 550 MPa (at ambient temperature)/600 °C — Dimensions*

ISO 8788, *Aerospace — Nuts, metric — Tolerances of form and position*

ISO 9139, *Aerospace — Nuts, plain or slotted (castellated) — Procurement specification*

TR 3823, *Aerospace series — Materials for plain and slotted hexagonal nuts* ⁴⁾

1) Corresponds to strength class of the associated bolt, the 100 % load of which it is able to withstand, when tested at ambient temperature, without breaking or cracking.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the surface treatment.

3) Published as ASD-STAN Prestandard at the date of publication of this standard.

4) Published as ASD-STAN Technical Report at the date of publication of this standard.

3 Required characteristics

3.1 Configuration — Dimensions — Masses

See Figure 1 and Table 1.

Dimensions and tolerances are in conformity with ISO 8279, expressed in millimetres and apply after surface treatment.

3.2 Materials

EN 2205, EN 2438, EN 3513, EN 2448 or TR 3823.

3.3 Surface treatment

EN 2133, 5 µm minimum on threads and all surfaces which can be contacted by a 20 mm diameter ball. On all other surfaces, a continuous cadmium plating shall be present.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3227:2010

<https://standards.iteh.ai/catalog/standards/sist/f7508791-eb67-4d72-8043-0c223c7bfe86/sist-en-3227-2010>


EN 3227:2010 (E)

 $\sqrt{6,3}$
 $\left[\sqrt{1,6} \right]$

These values in micrometres apply before surface treatment. The values do not apply to threads the surface texture of which will be achieved by usual manufacturing methods.

Break sharp edges 0,1 to 0,4.

Details of form not stated are at the manufacturer's option.

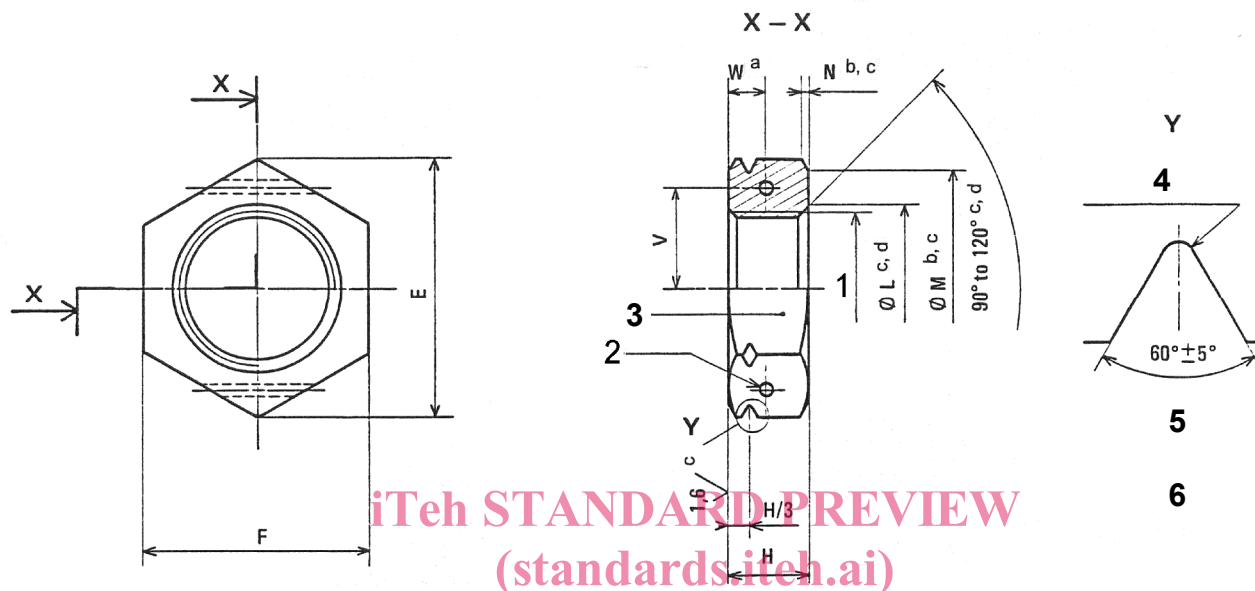

Key

- 1 Thread
- 2 Two holes $\varnothing U$ optional
- 3 Marking
- 4 $r = 0,2$ to $0,5$
- 5 The groove bottom shall not extend completely across the flats
- 6 Marking for left hand thread

- a From either face
- b Diameter M may be tangential to, but shall not intrude on the flats.
- c Applicable to both faces
- d All forms of entry (chamfer or radius) option within these limiting dimensions.

Tolerances of form and position shall be in conformity with ISO 8788.

Figure 1

Table 1

Diameter code	Left hand thread ^a	<i>E</i> min.	<i>F</i>	<i>H</i> h14	<i>L</i>	<i>M</i> min.	<i>N</i> max. min.	<i>U</i> H13	<i>V</i> ± 0,2	<i>W</i> min.	Mass kg/1 000 pieces approx.
020	MJ2×0,4-4H6H-LH	4,2	4	h12	1,6	2,2	+ 0,6 0	b	b	b	0,15
025	MJ2,5×0,45-4H6H-LH	5,3	5		2	2,7					0,3
030	MJ3×0,5-4H6H-LH	6,5	6		2,4	3,2					0,5
040	MJ4×0,7-4H6H-LH	7,6	7		3,2	4,2					0,85
050	MJ5×0,8-4H6H-LH	8,7	8		4	5,2					1,3
060	MJ6×1-4H5H-LH	10,9	10	h13	4,8	6,3	+ 0,8 0	1	3,9	2	2,4
070	MJ7×1-4H5H-LH	12	11		5,6	7,3					3,2
080	MJ8×1-4H5H-LH	14,3	13		6,4	8,3					5,2
100	MJ10×1,25-4H5H-LH	18,9	17		8	10,3					11,5
120	MJ12×1,25-4H5H-LH	21,1	19		9,6	12,3					16,1
140	MJ14×1,5-4H5H-LH	24,5	22		11,2	14,4					25
160	MJ16×1,5-4H5H-LH	26,8	24		12,8	16,4					33
180	MJ18×1,5-4H5H-LH	30,2	27		14,4	18,4					46
200	MJ20×1,5-4H5H-LH	33,6	30		16	20,4					62
220	MJ22×1,5-4H5H-LH	35,8	32		17,6	22,4					75
240	MJ24×2-4H5H-LH	40,4	36		19,2	24,5					108

^a In accordance with ISO 5855-2.

^b Lockwire holes not provided for these diameters.

SIST EN 3227:2010
<https://standards.iteh.ai/catalog/standards/sist/f7508791-cb67-4d72-8043-0c223c7bfe86/sist-en-3227-2010>

4 Designation

EXAMPLE

Description block	Identity block
NUT	EN3227H060
Number of this standard	
Holes code (see Table 2)	
Diameter code (see Table 1)	

NOTE If necessary the originator code I9005 shall be placed between the description block and the identity block.