



SLOVENSKI STANDARD

SIST EN 3228:2010

01-marec-2010

5 YfcbUj h_U!`A UjWZyYglfcVYzXfgyZn`bcfa Ubja `nYj ca ` `f UZ]n`Y`Už
_UXa]fUbY!`?`Ug]Z_UY`U.`-\$`ADUfufj`hYa dYfUi f]`c_c`]W]zB:) š7

Aerospace series - Nuts, hexagonal, plain, reduced height, normal across flats, in steel, cadmium plated - Classification: 900 MPa (at ambient temperature)/235 °C

Luft- und Raumfahrt - Einfache Sechskantmuttern mit reduzierter Höhe, normaler Schlüsselweite, aus Stahl, verkadmet - Klasse: 900 MPa (bei Raumtemperatur)/235 °C

Série aérospatiale - Écrous hexagonaux ordinaires, hauteur réduite, surplats normaux, en acier, cadmiés - Classification: 900 MPa (à température ambiante)/235 °C

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

Ta slovenski standard je istoveten z: EN 3228:2010

ICS:

49.030.30 Matice Nuts

SIST EN 3228:2010 en,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3228:2010

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3228

January 2010

ICS 49.030.30

English Version

**Aerospace series - Nuts, hexagonal, plain, reduced height,
normal across flats, in steel, cadmium plated - Classification:
900 MPa (at ambient temperature) / 235 °C**

Série aérospatiale - Écrous hexagonaux ordinaires, hauteur
réduite, surplats normaux, en acier, cadmiés -
Classification: 900 MPa (à température ambiante) / 235 °C

Luft- und Raumfahrt - Einfache Sechskantmuttern mit
reduzierter Höhe, normaler Schlüsselweite, aus Stahl,
verkadmet - Klasse: 900 MPa (bei Raumtemperatur) / 235
°C

This European Standard was approved by CEN on 11 December 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics	5
4 Designation	7
5 Marking	8
6 Technical specification	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3228:2010](https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010)

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

Foreword

This document (EN 3228:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2010, and conflicting national standards shall be withdrawn at the latest by July 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3228:2010

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

EN 3228:2010 (E)

1 Scope

This standard specifies the characteristics of plain, hexagonal nuts, reduced height, normal across flats, in steel, cadmium plated.

Classification: 900 MPa¹⁾ / 235 °C²⁾.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2133, *Aerospace series — Cadmium plating of steels with specified tensile strength $\leq 1\,450$ MPa, copper, copper alloys and nickel alloys*

EN 2205, *Aerospace series — Steel FE-PL1502 (25CrMo4) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2438, *Aerospace series — Steel FE-PL2102 (35NiCr6) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 2448, *Aerospace series — Steel FE-PL1503 (35CrMo4) — $900\text{ MPa} \leq R_m \leq 1\,100\text{ MPa}$ — Bars — $D_e \leq 40\text{ mm}$*

EN 3513, *Aerospace series — Steel FE-PL711 — Hardened and tempered — $900 \leq R_m \leq 1\,100\text{ MPa}$ — Bar and wire — $D_e \leq 45\text{ mm}$ ³⁾*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defense Organizations*

TR 3823, *Aerospace series — Materials for plain, slotted and self-locking by plastic ring hexagonal nuts*⁴⁾

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 8788, *Aerospace — Nuts, metric — Tolerances of form and position*

ISO 9139, *Aerospace — Nuts, plain or slotted (castellated) — Procurement specification*

ISO 9609, *Aerospace — Nuts, hexagonal, plain, reduced height, normal across flats, with MJ threads, classifications: 450 MPa (at ambient temperature) /120 °C, 450 MPa (at ambient temperature) /235 °C, 600 MPa (at ambient temperature) /425 °C, 900 MPa (at ambient temperature) /235 °C, 900 MPa (at ambient temperature) /315 °C, 900 MPa (at ambient temperature) /650 °C, 1 100 MPa (at ambient temperature) /235 °C, 1 100 MPa (at ambient temperature) /730 °C and 1 250 MPa (at ambient temperature) /600 °C — Dimensions*

1) Corresponds to strength class of the associated bolt, the 100 % load of which it is able to withstand, when tested at ambient temperature, without breaking or cracking.

2) Maximum temperature that the nut is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the surface treatment.

3) Published as ASD-STAN Prestandard at the date of publication of this standard.

4) Published as ASD-STAN Technical Report at the date of publication of this standard.

3 Required characteristics

3.1 Configuration — Dimensions — Masses

See Figure 1 and Table 1.

Dimensions and tolerances are in conformity with ISO 9609, expressed in millimetres and apply after surface treatment.

3.2 Materials

EN 2205, EN 2438, EN 2448, EN 3513 or TR 3823.

3.3 Surface treatment

EN 2133, 5 µm minimum on threads and all surfaces which can be contacted by a 20 mm diameter ball. On all other surfaces, a continuous cadmium plating shall be present.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3228:2010](https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010)

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

EN 3228:2010 (E)


6,3

1,6

These values in micrometres apply before surface treatment. The values do not apply to threads the surface texture of which will be achieved by usual manufacturing methods.

Break sharp edges 0,1 to 0,4.

Details of form not stated are at the manufacturer's option.

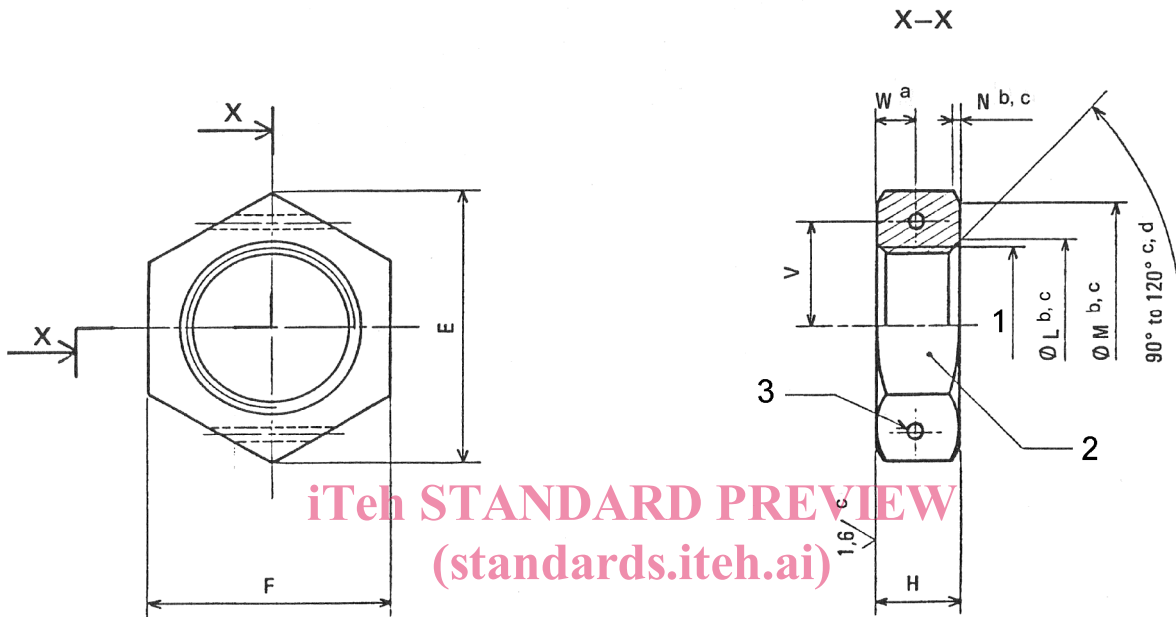

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3228:2010

<https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

Key

- 1 Thread
- 2 Marking
- 3 Two holes $\varnothing U$ optional

- a From either face
- b Diameter M may be tangential to, but shall not intrude on the flats.
- c Applicable to both face
- d All forms of entry (chamfer or radius) option within these limiting dimensions

Tolerances of form and position shall be in conformity with ISO 8788.

Figure 1

Table 1

Diameter code	Thread ^a	<i>E</i>		<i>F</i>	<i>H</i>		<i>L</i>	<i>M</i>	<i>N</i>		<i>U</i>	<i>V</i>	<i>W</i>	Mass kg/1 000 pieces approx.
		min.			h14				max.	min.				
040	MJ4×0,7-4H6H	7,6	7	h12	2,6	4,2	+0,6 0	6,4	0,5	0,2	b	b	b	0,65
050	MJ5×0,8-4H6H	8,7	8		3	5,2		7,4						0,9
060	MJ6×1-4H5H	10,9	10	h13	3,5	6,3	+0,8 0	9,3	0,6	0,3	1	3,9	1,4	1,6
070	MJ7×1-4H5H	12	11		4	7,3		10,2						2,1
080	MJ8×1-4H5H	14,3	13			8,3		12,2						3,1
100	MJ10×1,25-4H5H	18,9	17		5	10,3		16						6,9
120	MJ12×1,25-4H5H	21,1	19		6	12,3		18						2,1
140	MJ14×1,5-4H5H	24,5	22		7	14,4		21						2,6
160	MJ16×1,5-4H5H	26,8	24		8	16,4		23						3,1
180	MJ18×1,5-4H5H	30,2	27		9	18,4		26						3,6
200	MJ20×1,5-4H5H	33,6	30		10	20,4		29						4,1
220	MJ22×1,5-4H5H	35,8	32		11	22,4		30,9						4,6
240	MJ24×2-4H5H	40,4	36	12	24,5	34,9	5							
														65

^a In accordance with ISO 5855-2.


^b Lockwire holes not provided for these diameters.

iteh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3228:2010

4 Designation <https://standards.iteh.ai/catalog/standards/sist/fb2969b3-eccb-49f6-a571-b0994c1d653d/sist-en-3228-2010>

EXAMPLE

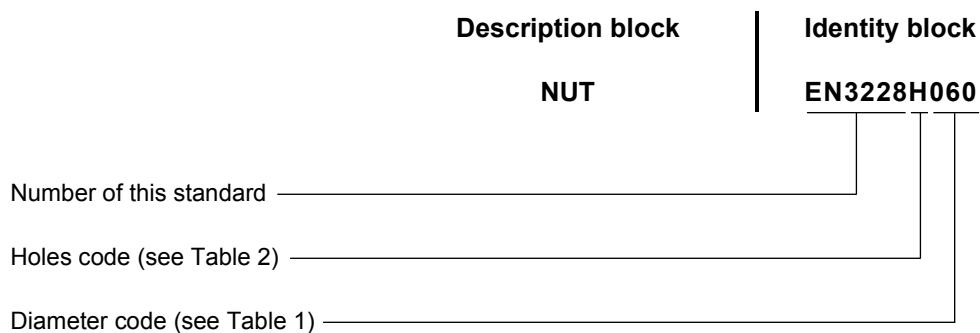

NOTE If necessary the originator code I9005 shall be placed between the description block and the identity block.

Table 2

Option	Code
Lockwire holes	H
No hole	— (hyphen)