

**SLOVENSKI STANDARD**  
**oSIST-TP CLC/prTR 50485:2008**  
**01-oktober-2008**

---

**Elektromagnetna združljivost - Meritve oddajanja v popolnoma neodbojnih sobah**

Electromagnetic compatibility - Emission measurements in fully anechoic chambers

Elektromagnetische Verträglichkeit - Störaussendung in Absorberräumen

Compatibilité électromagnétique - Emission en chambres anéchoïques entiers

**Ta slovenski standard je istoveten z: CLC/prTR 50485:2008**

<https://standards.iteh.ai/catalog/standards/sist/8ac7268d-56b9-4c28-8fbb-2fa1444d339a/sist-tp-clc-tr-50485-2011>

**ICS:**

33.100.10      Emisija      Emission

**oSIST-TP CLC/prTR 50485:2008      en**



TECHNICAL REPORT  
RAPPORT TECHNIQUE  
TECHNISCHER BERICHT

**DRAFT**  
**CLC/prTR 50485**

August 2008

ICS 33.100.10

Will supersede R210-010:2002

English version

**Electromagnetic compatibility -  
Emission measurements in fully anechoic chambers**

Compatibilité électromagnétique -  
Emission en chambres anéchoïques  
entiers

Elektromagnetische Verträglichkeit -  
Störaussendung in Absorberräumen

This draft Technical Report is submitted to CENELEC members for comments prior to the voting meeting.  
Deadline for CENELEC: 2008-11-07.

It has been drawn up by CLC/TC 210.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Warning : This document is not a Technical Report. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Report.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Central Secretariat: rue de Stassart 35, B - 1050 Brussels**

1 **Foreword**

2 This draft Technical Report was prepared by the Technical Committee CENELEC TC 210,  
3 Electromagnetic compatibility (EMC).

4 It is circulated for comments prior to the voting meeting foreseen on 2008-12-11 in accordance with  
5 the Internal Regulations, Part 2, Subclause 11.4.3.2 (simple majority).

6 This document will supersede R210-010:2002.

7

8

9 CLC/TC 210 Secretariat's note:

10 *National Committees are invited to comment on whether Annex H should be removed.*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

SIST-TP CLC/TR 50485:2011

<https://standards.iteh.ai/catalog/standards/sist/8ac7268d-56b9-4c28-8fbb-2fa1444d339a/sist-tp-clc-tr-50485-2011>

## Contents

11			
12	1	Scope .....	5
13	2	References .....	5
14	3	Definitions and abbreviations .....	6
15	3.1	Definitions .....	6
16	3.2	Abbreviations .....	7
17	4	Test and measurement equipment .....	7
18	4.1	Fully Anechoic Rooms (FARs).....	7
19	4.2	Antenna.....	7
20	5	Anechoic room performance .....	8
21	5.1	Theoretical normalised site attenuation .....	8
22	5.2	Room validation procedure .....	10
23	5.3	Anechoic room requirements .....	13
24	6	Emission measurement.....	13
25	6.1	Test set up .....	13
26	6.2	EUT position.....	15
27	6.3	Cable layout and termination .....	16
28	7	Test procedure .....	17
29	8	Test plan.....	17
30	9	Test report.....	18
31	Annex A (informative)	Determining the Site Reference .....	19
32	Annex B (informative)	Limit values .....	21
33	Annex C (informative)	Comparison of measurement uncertainties for 3 m OATS and 3 m FAR.....	27
34	C.1	Introduction .....	27
35	C.2	Uncertainty budgets for 3 m OATS and 3 m FAR.....	28
36	C.3	Comments on uncertainty budgets .....	30
37	Annex D (informative)	Derivation of free space NSA formula.....	32
38	D.1	Theoretical free space Normalised Site Attenuation.....	32
39	D.2	NSA formula for near-field separations.....	35
40	Annex E (informative)	Corrections of field strength for test distance .....	36
41	E.1	Introduction .....	36
42	E.2	Field strength correction factor for LPDAs.....	37
43	Annex F (informative)	NSA measurements with biconical antennas .....	38
44	F.1	Background .....	38
45	F.2	ANSI method.....	39
46	F.3	Conclusion .....	39
47	Annex G (informative)	Measurement of Balun imbalance.....	40
48	Annex H (informative)	FAR project.....	41
49	H.1	Description of the FAR project.....	41
50	H.2	Rationale of the FAR project.....	41
51	Bibliography.....		43
52			

53 **Figures**

54	Figure 1 – Theoretical <i>NSA</i> .....	9
55	Figure 2 – Measurement points in room validation procedure .....	11
56	Figure 3 – Typical test set-up in FAR, where a, b, c and e depend on the room performance .....	14
57	Figure 4 – Typical test set-up for table top equipment within the test volume of a FAR .....	15
58	Figure 5 – Typical test set-up for floor standing equipment within the test volume of a FAR .....	16
59	Figure A.1 – Free space site reference measurement set up .....	20
60	Figure B.1 – Differences in emission measurement results between OATS and FAR .....	22
61	Figure B.2 – Geometrical optics model for OATS measurements .....	23
62	Figure B.3 – Field attenuation between two half-wave dipoles above ground plane with fixed	
63	transmit antenna height and variable receive antenna height .....	23
64	Figure B.4 – Equivalent circuit diagram of a typical Equipment Under Test (EUT) .....	24
65	Figure B.5 – Differences in the received field strength of an electrically short straight wire on an	
66	ideal OATS (1 m – 4 m scan of the receive antenna), and in a FAR ( $E_{OATS} - E_{FAR}$ ) .....	25
67	Figure B.6 – Differences in the received field strength of an electrically short straight wire on an	
68	ideal OATS (1 m – 4 m scan of the receive antenna), and in a FAR ( $E_{OATS} - E_{FAR}$ ) .....	26
69	Figure F.1 – <i>NSA</i> values for free space, calculated for a small and a large biconical antenna	
70	separated by 3 m .....	38

71

72 **Tables**

73	Table 1 – Frequency ranges and step sizes .....	11
74	Table 2 – Relation between maximum diameter of EUT and test distance .....	13
75	Table B.1 – Preferred limits .....	21
76	Table C.1 – Uncertainty budget for emission measurements on 3 m open area test site .....	28
77	Table C.2 – Uncertainty budget for emission measurements in 3 m FAR .....	29

78

## 1 Scope

This Technical Report applies to emission measurements of radiated electromagnetic fields in Fully Anechoic Rooms (FAR) in the frequency range from 30 MHz to 18 GHz. This Technical Report covers the frequency range from 30 MHz – 1 000 MHz. The frequency range above 1 GHz is under consideration, due to the absence of practical experience.

This Technical Report describes the validation procedure for the Fully Anechoic Room for radiated emission tests and the procedures to carry out the tests (e.g. test set up, EUT position, cable layout and termination, test procedures). Recommendations for the relation between FAR emission limits and common Open Area Test Site (OATS) emission limits given in standards such as EN 55011 and EN 55022 are given in Annex B.

This FAR emission method may be chosen by product committees as an alternative method to emission measurement on an Open Area Test Site (OATS) as described in CISPR 16 series. In such cases, the product committee should also define the appropriate limits. Typical measurement uncertainty values for FARs and OATS are given in Annex C.

## 2 References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50147-1, *Anechoic chambers – Part 1: Shield attenuation measurement*

EN 55011, *Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics – Limits and methods of measurement (CISPR 11, mod.)*

EN 55022:1998 <sup>1)</sup>, *Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement (CISPR 22:1997, mod.)*

CISPR 16-1:1999 <sup>2)</sup>, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1: Radio disturbance and immunity measuring apparatus*

CISPR 16-2 <sup>3)</sup>, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2: Methods of measurement of disturbance and immunity*

CISPR 16-3:2000 <sup>4)</sup>, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 3: Reports and recommendations of CISPR*

CISPR 16-4 series, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainties, statistics and limit modelling*

IEC 60050-161, *International Electrotechnical Vocabulary (IEV) – Chapter 161: Electromagnetic compatibility*

<sup>1)</sup> Will be superseded by EN 55022:2006, *Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement (CISPR 22:2005, mod.)* at the date of the latter, i.e. 2009-10-01.

<sup>2)</sup> Superseded by CISPR 16-1 series, harmonized as EN 55016-1 series, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1: Radio disturbance and immunity measuring apparatus*.

<sup>3)</sup> Superseded by CISPR 16-2 series, harmonized as EN 55016-2 series, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2: Methods of measurement of disturbance and immunity*.

<sup>4)</sup> Superseded by CISPR 16-3:2003, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 3: CISPR technical reports*.

### 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of this document, the terms and definitions given in IEC 60050-161 and the following apply.

##### 3.1.1

##### **Fully Anechoic Room (FAR)**

shielded enclosure whose internal surfaces are lined with radio frequency absorbing material (i.e. RAM), that absorbs electromagnetic energy in the frequency range of interest

NOTE The fully Absorber-Lined Room is intended to simulate free space environment.

##### 3.1.2

##### **Equipment Under Test (EUT)**

test sample including connected cables

NOTE The EUT may consist of one or several pieces of equipment.

##### 3.1.3

##### **test volume**

region of the room that meets the NSA requirements of this Technical Report and which contains the EUT as fully set up

##### 3.1.4

##### **free space antenna factor ( $AF_{FS}$ )**

antenna factor of an antenna which is not affected by mutual coupling to conducting bodies in the environment of the antenna

NOTE It is also the antenna factor measured when the antenna under test is illuminated by a plane wave, which implies that the source antenna is in the far-field of the antenna under test. Antenna factor is defined as the ratio of the magnitude of the E-field in which the antenna is immersed to the voltage at the antenna output of a given transmission line impedance, usually 50  $\Omega$ .

##### 3.1.5

##### **antenna reference point**

physical position on the antenna from which the separation distance to the defined reference plane on the EUT is measured

NOTE For dipole and biconical antennas this will be the centre of the antenna in line with the central antenna elements. For an LPDA antenna and a hybrid antenna, the reference point is the mark on the antenna provided by the manufacturer for this purpose. The reference point is approximately at the mid-way point between the array elements that are active at the top and bottom frequencies at which the measurements are being made. Hybrid antenna is here defined as a combination of a biconical and LPDA antenna which has a frequency range including 30 MHz to 1 GHz.

##### 3.1.6

##### **Normalised Site Attenuation (NSA)**

site attenuation obtained from the ratio of the source voltage connected to a transmitting antenna and the received voltage as measured on the receiving antenna terminals

NOTE Normalised site attenuation is site attenuation in decibels minus the antenna factors of the transmit and receive antenna factors. NSA was first introduced for evaluation of open area test sites with ground planes and was measured by height scanning the receive antenna. In this Technical Report, NSA is measured in a quasi-free space environment, and because there is no deliberate ground plane height scanning is not required.

##### 3.1.7

##### **test distance ( $d_t$ )**

distance measured from the reference point of the antenna to the front of the boundary of the EUT

### 3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

EUT	Equipment Under Test
FAR	Fully Anechoic Room
NSA	Normalised Site Attenuation
$AF_{FS}$	Antenna Factor (free space)
LPDA	Log-Periodic Dipole Array
OATS	Open Area Test Site
RS	Reference Site
SA	Site Attenuation
$SA_R$	measurement of SA made on RS
NEC	Numerical Electromagnetic Code

## 4 Test and measurement equipment

Equipment in accordance with CISPR 16 series shall be used.

### 4.1 Fully Anechoic Rooms (FARs)

A Fully Anechoic Room is required for the emission testing in which the radiated electromagnetic waves propagate as in free space and only the direct ray from the transmitting antenna reaches the receiving antenna. All indirect and reflected waves shall be minimised with the use of proper absorbing material on all walls, the ceiling and the floor of the FAR.

The screening of the FAR shall have an adequate attenuation level to avoid outside electromagnetic radiation entering the room and influencing the measurement results. The shield attenuation is measured in accordance with EN 50147-1. Shielding recommendations are given in CLC/TR 50484.

### 4.2 Antenna

Linear polarised antennas shall be used to measure the emitted electromagnetic field of the EUT. Biconical or log-periodic antennas and hybrid antennas are typical antennas used. The free space antenna factor shall be used. CISPR 16-3:2000, 4.7 gives parameters of broadband antennas. However no length limitation on LPDA or hybrid antennas is given. CISPR 16-1:1999, 5.5.4 and 5.5.5 give information on antennas. CISPR 16-1:1999, 5.5.5.2 b) states "it is essential that the variation of the effective distance of the antenna from the source and its gain with frequency be taken into account". Antennas over 1,5 m in length could increase the uncertainties of emission testing using a separation of 3 m between the reference point of the antenna and the front of the EUT.

## 5 Anechoic room performance

### 5.1 Theoretical normalised site attenuation

The Site Attenuation (SA) is the loss measured between the connectors of two antennas on a particular site. For a free space environment the SA (in dB) can be defined by Equation (1) (see Annex D):

$$SA = 20 \log_{10} \left[ \left( \frac{5Z_O}{2\pi} \right) \left( \frac{d}{\sqrt{1 - \frac{1}{(\beta d)^2} + \frac{1}{(\beta d)^4}}} \right) \right] - 20 \log_{10} f_m + AF_R + AF_T \quad [\text{dB}] \quad (1)$$

where

$AF_R$  is the antenna factor of the receive antenna in dB/m;

$AF_T$  is the antenna factor of the transmit antenna in dB/m;

$d$  is the distance between the reference points of both antennas in meters;

$Z_O$  is the reference impedance (i.e. 50  $\Omega$ );

$\beta$  is defined as  $2\pi/\lambda$ ;


$f_m$  is the frequency in MHz.

The theoretical Normalised Site Attenuation (NSA) in dB is defined as site attenuation with respective antenna factors subtracted, thus:


$$NSA_{\text{calc}} = 20 \log_{10} \left[ \left( \frac{5Z_O}{2\pi} \right) \left( \frac{d}{\sqrt{1 - \frac{1}{(\beta d)^2} + \frac{1}{(\beta d)^4}}} \right) \right] - 20 \log_{10} f_m \quad (2)$$

In far-field conditions Equation (2) simplifies to Equation (3) by omitting the near field terms:

$$NSA_{\text{calc}} = 20 \log_{10} \left[ \frac{5Z_O d}{2\pi} \right] - 20 \log_{10} f_m \quad (3)$$

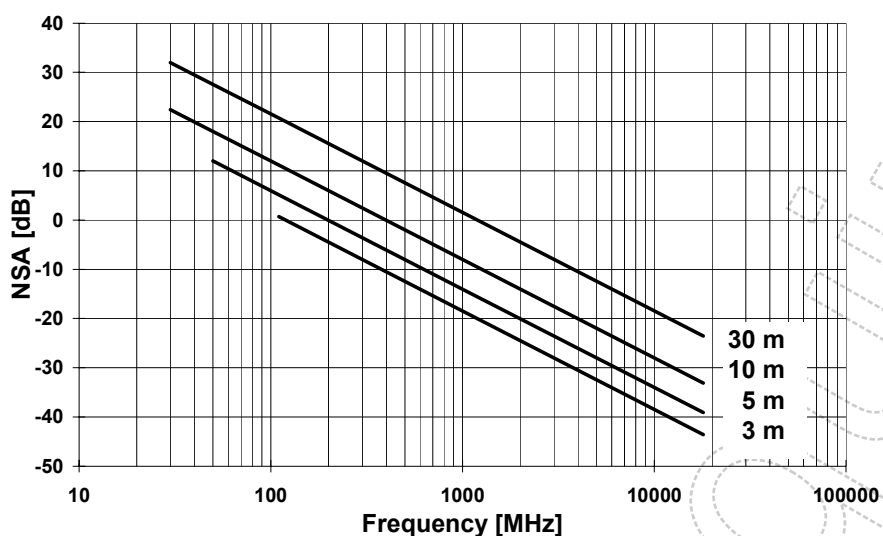

1a) Plot of theoretical NSA values in free space for far field conditions (Equation (3))

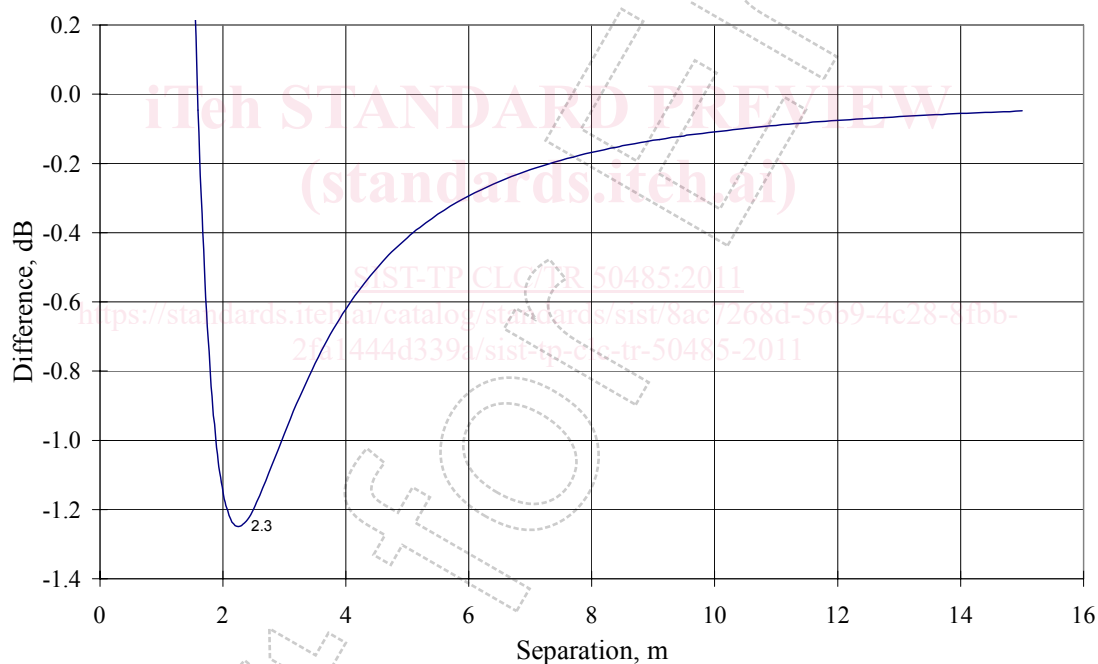

Distances relate to a frequency of 30 MHz.

1b) Difference in theoretical NSA between Equation (2) and Equation (3)

Figure 1 – Theoretical NSA

Using the simplified Equation (3) the error is less than 0,1 dB at frequencies above 60 MHz for 5 m distance and above 110 MHz for 3 m distance. Figure 1b shows the worst case near-field error which is at 30 MHz. However at higher frequencies there are Fresnel zone errors for large antennas which is treated in Annex F.

Equation (1) and Equation (2) account for near field effects of small antennas. In this context, using a transmit antenna less than 40 cm long, near-field effects become significant ( $> 0,2$  dB) where the receive antenna length is greater than a quarter of the separation distance. This assumes the use of a 1,4 m long biconical antenna at 300 MHz. Figure F.1 shows that the error is less than 0,2 dB for a

207 separation of 3 m and a maximum frequency of 200 MHz (it is common to change to a log antenna  
208 above 200 MHz). To cater for the general use of antennas (biconicals up to 300 MHz, or bilogs), the  
209 site reference method (6.2.1 and Annex A) shall be used for chamber validation at distances up to  
210 5 m. In this method the site attenuation measured in the FAR are compared to those measured on a  
211 free space reference site.

## 212 5.2 Room validation procedure

213 The test volume must meet the room requirements given in 5.3. The shape of the test volume will be a  
214 cylinder, due to the rotation of the EUT on a turntable. The minimum height and diameter of the test  
215 volume shall be 1 m. The height and diameter do not have to be equal between the maximum and  
216 minimum values.

217 A single SA measurement is insufficient to pick up possible reflections from the construction and/or  
218 absorbing material comprising the walls, the floor and the ceiling of the Fully Anechoic Room.

219 In validating the Fully Anechoic Room SA measurements shall be performed at 15 measurement  
220 points for horizontal and vertical polarisation of the antennas:

- 221 1) at three heights of the test volume: bottom, middle and top of test volume;
- 222 2) at five positions in all three horizontal planes: the centre, left, right, front and back position of the  
223 horizontal plane.


224 For SA measurements, two broadband antennas shall be used: one transmit antenna at the  
225 measurement points of the test volume and one receive antenna outside this test volume at a  
226 prescribed orientation and position. The transmit antenna shall approximate an omnidirectional  
227 antenna pattern and shall have a maximum dimension of 40 cm. Typical antennas are biconical  
228 antennas. The receive antenna used during the room validation shall be of the same type as the  
229 receive antenna used during radiated emission testing of the EUT.

230 The frequency range 30 MHz to 1 GHz can be covered with one antenna, a hybrid antenna. The  
231 measurement results may be different if separate biconical and LPDA antennas are used.

232 For FAR validation the receive antenna shall be in the position of the middle level of the test volume  
233 as shown in Figure 2 and operated in horizontal and vertical polarisation. The distance between  
234 reference points of the receive and transmit antenna shall be  $d_{nominal}$ . The height of the measurement  
235 volume is less than the height of the test volume by the height of the transmit antenna. This is in order  
236 that the tip of the vertically polarised transmit antenna does not protrude above the top plane or below  
237 the top plane of the test volume. This treatment has not been applied, by reducing the diameter, to the  
238 horizontally aligned antenna, because it is room height rather than width which is at issue.

239 When varying the transmit antenna to the other positions of the test volume the receive antenna shall  
240 be moved to  $d_{nominal}$ . In all positions and polarisation the antennas shall face each other (receive  
241 antenna tilted). When the transmit antenna is placed in the upper and bottom level, the receive  
242 antenna remains in the middle level. The transmit antenna is moved to all 15 positions, the 30 site  
243 validation measurements are performed. Tilting of the antennas implies that only one site reference  
244 measurement is needed to cover all 15 positions.

245 The back-position does not need to be taken into account if the distance between the boundary of the  
246 test volume and tips of the absorber is more than 1 m. Experiments and modelling have shown that  
247 this distance could be reduced to 0,5 m and further work may be needed to confirm this.

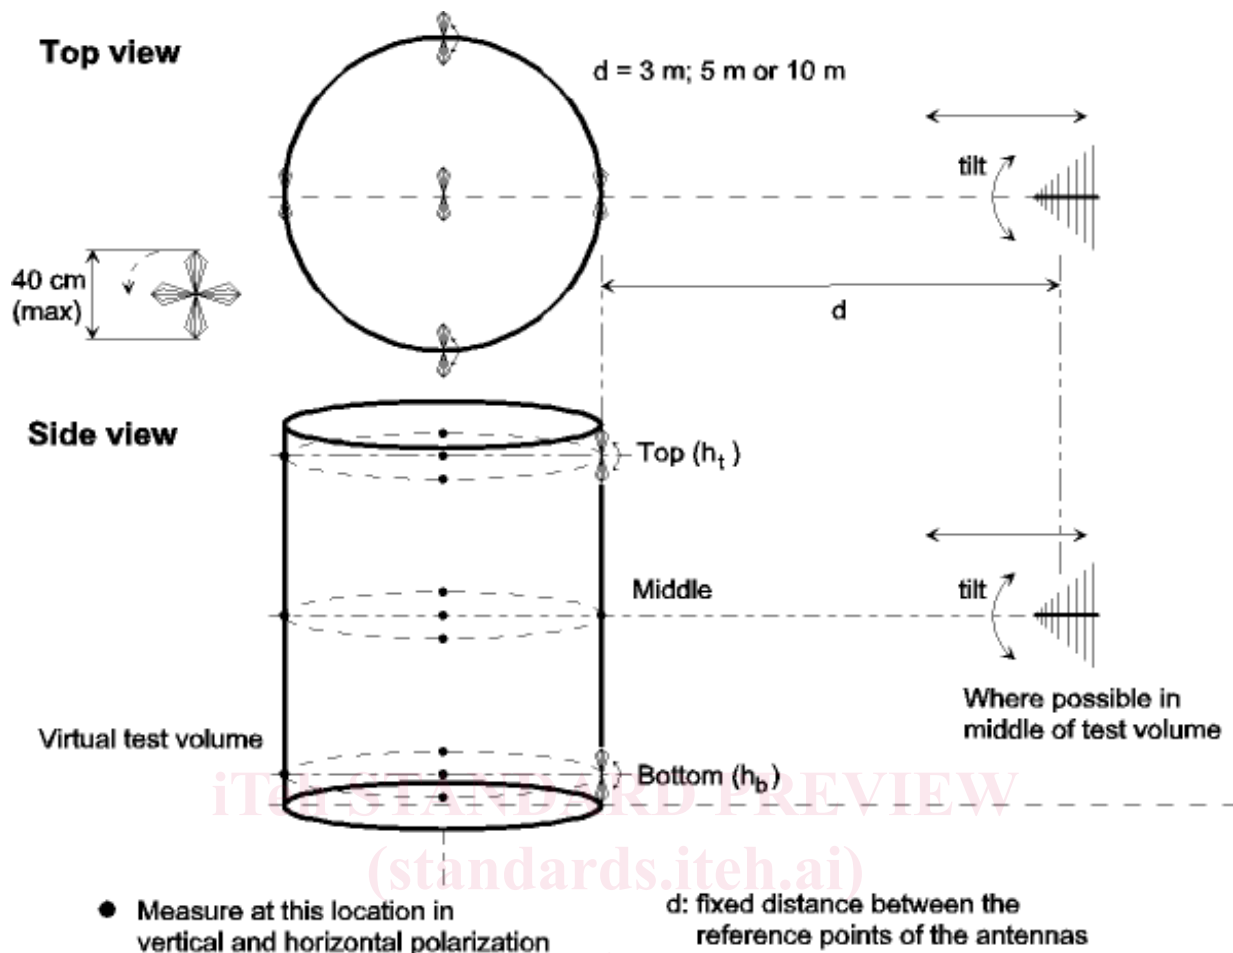

**Figure 2 – Measurement points in room validation procedure**

For each measurement the frequency range is incrementally swept. The frequency step size shall not exceed 1 % and need not be less than 1 MHz as given in Table 1.

**Table 1 – Frequency ranges and step sizes**

Frequency range MHz	Maximum frequency step MHz
30 – 100	1
100 – 500	5
500 – 1 000	10

For validating the room performance, two methods exist:

- 1) the site-reference method, preferred for a test distance up to 5 m;
- 2) the NSA-method, preferred for test distances larger than 5 m.

NOTE With reference to the site reference method, achieving quasi-free space conditions requires expertise. The problem is in sufficiently eliminating reflections from the ground. In practice this probably confines the site reference method as described in Annex A to distances of less than 5 m. On the other hand there are also limitations with the NSA method in that the free space antenna factor is used. At 3 m distance the antenna coupling is not negligible and expertise is required to correct the free space antenna factor for coupling. A practical solution is to confine the NSA method to distances greater than 5 m. Corrections, such as to phase centre, are required, but this can be done precisely.