



# SLOVENSKI STANDARD

SIST EN 62226-3-1:2008

01-januar-2008

Exposure to electric or magnetic fields in the low and intermediate frequency range -  
 Methods for calculating the current density and internal electric field induced in the  
 human body - Part 3-1: Exposure to electric fields - Analytical and 2D numerical models

Exposure to electric or magnetic fields in the low and intermediate frequency range -  
 Methods for calculating the current density and internal electric field induced in the  
 human body - Part 3-1: Exposure to electric fields - Analytical and 2D numerical models

## iTeh STANDARD PREVIEW

Sicherheit in elektrischen oder magnetischen Feldern im niedrigen und mittleren  
 Frequenzbereich - Verfahren zur Berechnung der induzierten Körperstromdichte und des  
 im menschlichen Körper induzierten elektrischen Feldes - Teil 3-1: Exposition  
 gegenüber elektrischen Feldern - Analytische Modelle und numerische 2D-Modelle

<https://standards.itih.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008>

Exposition aux champs électriques ou magnétiques a basse et moyenne fréquence -  
 Méthodes de calcul des densités de courant induit et des champs électriques induits  
 dans le corps humain - Partie 3-1: Exposition a des champs électriques - Modeles  
 analytiques et numériques 2D

**Ta slovenski standard je istoveten z: EN 62226-3-1:2007**

### ICS:

17.220.20      T ^ | b } b ^ Á | \ d ä } ä ö ä      Measurement of electrical  
                   { æ } ^ ç ä ö ^ | ä ä                    and magnetic quantities

**SIST EN 62226-3-1:2008**

**en,fr,de**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 62226-3-1:2008

<https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008>

**Exposure to electric or magnetic fields  
in the low and intermediate frequency range -  
Methods for calculating the current density  
and internal electric field induced in the human body -  
Part 3-1: Exposure to electric fields -  
Analytical and 2D numerical models  
(IEC 62226-3-1:2007)**

Exposition aux champs électriques  
ou magnétiques à basse  
et moyenne fréquence -

Méthodes de calcul des densités  
de courant induit et des champs électriques  
induits dans le corps humain -

Partie 3-1: Exposition

à des champs électriques -  
Modèles analytiques et numériques 2D

(CEI 62226-3-1:2007)

Sicherheit in elektrischen

oder magnetischen Feldern im niedrigen  
und mittleren Frequenzbereich -

Verfahren zur Berechnung der induzierten  
Körperstromdichte und des im menschlichen  
Körper induzierten elektrischen Feldes -

Teil 3-1: Exposition gegenüber

elektrischen Feldern -

Analytische Modelle

und numerische 2D-Modelle

(IEC 62226-3-1:2007)

<https://standards.iteh.ai/catalog/standards/sist/62226-3-1-2007/iec-62226-3-1-2007>  
SIST EN 62226-3-1:2007  
6298e8755339/sist-en-62226-3-1-2008

This European Standard was approved by CENELEC on 2007-09-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## CENELEC

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

## Foreword

The text of document 106/125/FDIS, future edition 1 of IEC 62226-3-1, prepared by IEC TC 106, Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 62226-3-1 on 2007-09-01.

This European Standard is to be used in conjunction with EN 62226-1:2005.

The following dates were fixed:

- latest date by which the EN has to be implemented  
at national level by publication of an identical  
national standard or by endorsement (dop) 2008-06-01
- latest date by which the national standards conflicting  
with the EN have to be withdrawn (dow) 2010-09-01

---

## Endorsement notice

The text of the International Standard IEC 62226-3-1:2007 was approved by CENELEC as a European Standard without any modification.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 62226-3-1:2008

<https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008>

INTERNATIONAL  
STANDARD

IEC  
CEI

NORME  
INTERNATIONALE

62226-3-1

First edition  
Première édition  
2007-05

---

---

**Exposure to electric or magnetic fields  
in the low and intermediate frequency range –  
Methods for calculating the current density and  
internal electric field induced in the human body –**

**Part 3-1:  
Exposure to electric fields –  
Analytical and 2D numerical models**

SIST EN 62226-3-1:2008

<https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-62226-3-1:2008>

**Exposition aux champs électriques ou  
magnétiques à basse et moyenne fréquence –  
Méthodes de calcul des densités de courant  
induit et des champs électriques induits dans  
le corps humain –**

**Partie 3-1:  
Exposition à des champs électriques –  
Modèles analytiques et numériques 2D**



Commission Electrotechnique Internationale  
International Electrotechnical Commission  
Международная Электротехническая Комиссия

PRICE CODE  
CODE PRIX

XA

*For price, see current catalogue  
Pour prix, voir catalogue en vigueur*

## CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
2 Exposure to electric field.....	8
3 General procedure.....	11
3.1 Shape factor.....	11
3.2 Procedure.....	11
4 Human body models.....	12
4.1 General.....	12
4.2 Surface area.....	12
4.3 Semi-spheroidal model.....	13
4.4 Axisymmetrical body model.....	15
5 Calculation of induced current.....	16
5.1 General.....	16
5.2 Semi-spheroid.....	16
5.3 Axisymmetrical models.....	20
5.4 Comparison of the analytical and numerical models.....	27
6 Influence of electrical parameters.....	27
6.1 General.....	27
6.2 Influence of permittivity.....	27
6.3 Influence of conductivity.....	28
6.4 Non-homogeneous conductivity.....	28
7 Measurement of currents induced by electric fields.....	28
7.1 General.....	28
7.2 Current flowing to the ground.....	28
Annex A (normative) Analytical solutions for a spheroid in a uniform electric field.....	30
Annex B (normative) Human body axisymmetrical model.....	33
Annex C (informative) Child body model.....	38
Annex D (informative) Example of use of this standard.....	40
Annex E (informative) Numerical calculation methods.....	44
Bibliography.....	52
Figure 1 – Illustration of the phenomenon of currents induced by electric field in a human body standing on the ground.....	10
Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres).....	10
Figure 3 – A realistic body model.....	12
Figure 4 – Scheme of the semi-spheroid simulating a human being standing on a zero potential plane.....	13
Figure 5 – Equivalent spheroid radius, $R$ , versus height, $L$ , and for different mass, $M$ .....	15
Figure 6 – The axisymmetrical body model for the reference man (left) and woman (right).....	15

Figure 7 – Conductive spheroid exposed to electric field.....	16
Figure 8 – Calculation of the <i>shape factor for electric field</i> $K_E$ for an spheroid exposed to an unperturbed electric field.....	17
Figure 9 – Current density $J_S$ induced by an unperturbed electric field (1 kV/m, 50 Hz) in a spheroid versus parameter $L/R$ (values in $\mu\text{A}/\text{m}^2$ ).....	18
Figure 10 – Dimensions and mesh of the semi-spheroid .....	19
Figure 11 – Distortion of power frequency electric field lines close to the conductive semi-spheroid .....	19
Figure 12 – Calculated induced current density $J_A(h)$ in the body standing in a vertical 50 Hz electric field of 1 kV/m .....	21
Figure 13 – Computation domain .....	23
Figure 14 – Mesh of the man body model and distortion of power frequency electric field lines close to model.....	23
Figure 15 – Distribution of potential lines and 50 Hz electric field magnitude (man model) .....	24
Figure 16 – Computation of induced currents $J_A$ along a vertical axis, and distribution of induced currents in the man model at 50 Hz .....	24
Figure 17 – Mesh of the woman body model and distortion of power frequency electric field lines close to model.....	25
Figure 18 – Distribution of potential lines and 50 Hz electric field magnitude (woman model) .....	26
Figure 19 – Computation of induced currents $J_A$ along a vertical axis, and distribution of induced currents in the woman model at 50 Hz .....	26
Figure A.1 – Conductive spheroid exposed to electric field.....	30
Figure B.1 – Normalised axisymmetrical models. Left: man, Right: woman .....	35
Figure C.1 – Computation of induced currents $J_Z$ along a vertical axis, and distribution of induced currents in the 10 years reference child model.....	39
Figure E.1 – Spheroid model.....	45
Figure E.2 – Space potential model .....	46
Figure E.3 – Exemple of charge simulation method using rings.....	47
Figure E.4 – Superficial charges integral equation method, cutting of the body into $N$ elements.....	48
Figure E.5 – Mesh of the body using finite element method .....	49
Figure E.6 – Impedance method .....	50
Figure E.7 – Yee-method: Electric and magnetic grids for spatial discretization .....	51
Table 1 – Data for reference man and reference woman .....	13
Table 2 – Values of $\arcsin(e) / e$ for different values of $L/R$ .....	14
Table 3 – Derived data using spheroid model at 50 Hz .....	20
Table 4 – Electric field $E_{BR}$ required to produce basic restrictions $J_{BR}$ in the neck at 50 Hz.....	22
Table 5 – Comparison of values of the shape factor for electric field $K_E$ and corresponding current densities for an unperturbed 50 Hz electric field of 1 kV/m.....	27
Table B.1 – Measures from antropomorphic survey used to construct vertical dimensions of axisymmetrical model [56] .....	34

Table B.2 – Measures from antropomorphic survey used to construct the radial dimensions of axisymmetrical model [56] ..... 34

Table B.3 – Normalised model dimensions..... 36

Table B.4 – Axisymmetric model dimensions for reference man and reference woman whose mass and height are defined by ICRP [38] and are given in Table 1 ..... 37

Table C.1 – Reference values provided by ICRP for male and female children..... 38

Table C.2 – Dimensions of the reference children (in m excepted  $SB_R$  in m<sup>2</sup>) ..... 38

Table C.3 – Results of analytical method for the reference children ..... 39

Table D.1 – Normalised dimensions of the women model..... 41

Table D.2 – Calculation of the dimensions for a specific person ..... 42

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 62226-3-1:2008

<https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008>



## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**EXPOSURE TO ELECTRIC OR MAGNETIC FIELDS  
IN THE LOW AND INTERMEDIATE FREQUENCY RANGE –  
METHODS FOR CALCULATING THE CURRENT DENSITY AND  
INTERNAL ELECTRIC FIELD INDUCED IN THE HUMAN BODY –****Part 3-1: Exposure to electric fields –  
Analytical and 2D numerical models**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62226-3-1 has been prepared by IEC technical committee 106: Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure.

This standard is to be used in conjunction with the first edition of IEC 62226-1:2004, *Exposure to electric or magnetic fields in the low and intermediate frequency range – Methods for calculating the current density and internal electric field induced in the human body – Part 1: General*.

The text of this standard is based on the following documents:

FDIS	Report on voting
106/125/FDIS	106/128/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This International Standard constitutes Part 3-1 of IEC 62226 series, which will regroup several international standards and technical reports within the framework of the calculation of induced current densities and internal electric fields.

A list of all parts of the IEC 62226 series, published under the general title *Exposure to electric or magnetic fields in the low and intermediate frequency range – Methods for calculating the current density and internal electric field induced in the human body*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**  
[SIST EN 62226-3-1:2008](https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008)  
<https://standards.iteh.ai/catalog/standards/sist/00700cfe-14d9-4bf7-b935-6298e8755339/sist-en-62226-3-1-2008>

## INTRODUCTION

Public interest concerning human exposure to electric and magnetic fields has led international and national organisations to propose limits based on recognised adverse effects.

This standard applies to the frequency range for which the exposure limits are based on the induction of voltages or currents in the human body, when exposed to electric and magnetic fields. This frequency range covers the low and intermediate frequencies, up to 100 kHz. Some methods described in this standard can be used at higher frequencies under specific conditions.

The exposure limits based on biological and medical experimentation about these fundamental induction phenomena are usually called “basic restrictions”. They include safety factors.

The induced electrical quantities are not directly measurable, so simplified derived limits are also proposed. These limits, called “reference levels” are given in terms of external electric and magnetic fields. They are based on very simple models of coupling between external fields and the body. These derived limits are conservative.

Sophisticated models for calculating induced currents in the body have been used and are the subject of a number of scientific publications. These models use numerical 3D electromagnetic field computation codes and detailed models of the internal structure with specific electrical characteristics of each tissue within the body. However such models are still developing; the electrical conductivity data available at present has considerable shortcomings; and the spatial resolution of models is still progressing. Such models are therefore still considered to be in the field of scientific research and at present it is not considered that the results obtained from such models should be fixed indefinitely within standards. However it is recognised that such models can and do make a useful contribution to the standardisation process, specially for product standards where particular cases of exposure are considered. When results from such models are used in standards, the results should be reviewed from time to time to ensure they continue to reflect the current status of the science.

# EXPOSURE TO ELECTRIC OR MAGNETIC FIELDS IN THE LOW AND INTERMEDIATE FREQUENCY RANGE – METHODS FOR CALCULATING THE CURRENT DENSITY AND INTERNAL ELECTRIC FIELD INDUCED IN THE HUMAN BODY –

## Part 3-1: Exposure to electric fields – Analytical and 2D numerical models

### 1 Scope

This part of IEC 62226 applies to the frequency range for which exposure limits are based on the induction of voltages or currents in the human body when exposed to electric fields.

This part defines in detail the coupling factor  $K$  – introduced by the IEC 62226 series to enable exposure assessment for complex exposure situations, such as non-uniform magnetic field or perturbed electric field – for the case of simple models of the human body, exposed to uniform electric fields. The coupling factor  $K$  has different physical interpretations depending on whether it relates to electric or magnetic field exposure. It is the so called “shape factor for electric field”.

This part of IEC 62226 can be used when the electric field can be considered to be uniform, for frequencies up to at least 100 kHz.

This situation of exposure to a “uniform” electric field is mostly found in the vicinity of high voltage overhead power systems. For this reason, illustrations given in this part are given for power frequencies (50 Hz and 60 Hz).

### 2 Exposure to electric field

Alternating electric fields are generated by energised conductors (i.e. under voltage). In the immediate vicinity of domestic electrical equipment, such as lights, switches, food mixers and irons, local electric-field strengths about 100 V/m may be found. Such fields are non-uniform, but their strengths are far below the levels recommended in safety guidelines, so there is no need of calculation of induced currents in such exposure situations.

Higher electric-field strengths may be found in the vicinity of high voltage equipment such as electric power line. In the frequency range covered by this standard, it is considered that exposure from power lines is the only significant exposure source for public regarding safety guidelines limits.

Guidelines on human exposure to electric fields are generally expressed in terms of induced current density or internal electric field. These quantities cannot be measured directly and the purpose of this document is to give guidance on how to assess these quantities induced in the human body by external (environmental) electric fields  $E_0$ .

The induced current density  $J$  and the internal electric field  $E_i$  are closely linked by the simple relation:

$$J = \sigma \cdot E_i \quad (1)$$

where  $\sigma$  is the conductivity of the body tissue under consideration.

For reason of simplification, the content of this standard is presented in terms of induced current densities  $J$ , from which values of internal electric field  $E_i$  can be easily derived using the previous formula.

All the calculation developed in this document use the low frequency approximation in which displacement currents are negligible, such that  $\epsilon\omega/\sigma$  is less than 1 in the body. This approximation has been checked using published tissue data [29,31] <sup>1)</sup> in the low frequency range and it has been found to be valid for frequencies up to at least 100 kHz and is probably valid at higher frequencies.

Computations based on sophisticated numerical models of the human body [24] also demonstrate that this assumption is valid at frequencies up to more than 100 kHz by showing that the relationship between the induced current density in the body and the product of frequency and external electric field hardly varies at all between 50 Hz and 1 MHz, and is only slightly altered at 10 MHz.

Analytical models can be used for simple cases of calculations.


Electric fields cause displacement of electric charges in conductive objects (including living bodies) and, because these fields are alternating, the electric charges move backwards and forwards. The result is an "induced" alternating current inside the conductive object. This current depends only on:

- the shape and size of the conducting object;
- the characteristics (magnitude, polarisation, degree of non-uniformity, etc.) of the unperturbed field (field which is measured in the absence of any conducting object);
- the frequency of the field
- the variation of conductivity of the object (in homogeneous media, the current density induced by electric fields does not depend on conductivity).

Figure 1 illustrates this induction phenomenon for the case where the body is in electrical contact with the ground.


---

<sup>1)</sup> Figures in square brackets refer to the Bibliography.

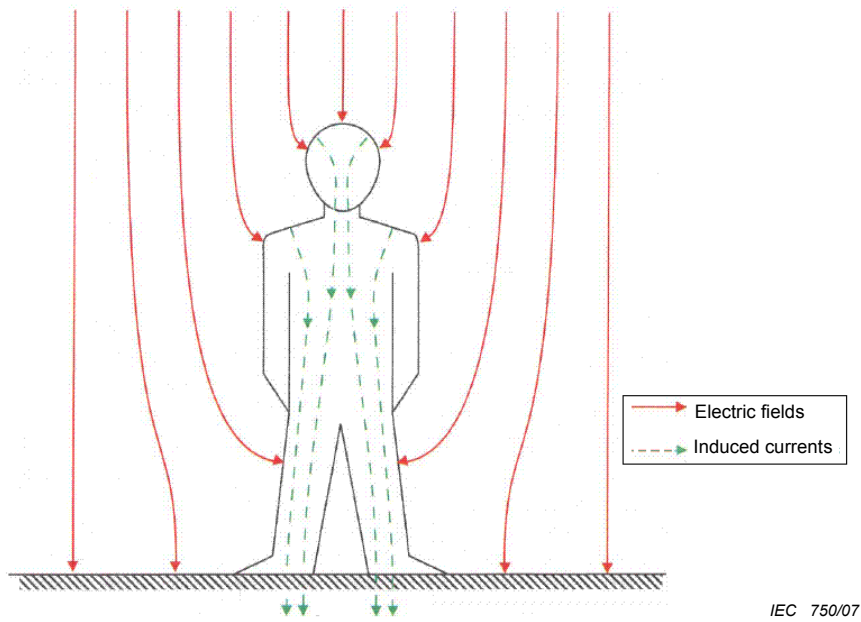

**Figure 1 – Illustration of the phenomenon of currents induced by an electric field in a human body standing on the ground**

The typical case of public exposure to an electric field is under high voltage power transmission lines. In this case, the distance between the source of field and the human body is large and the field in the zone close to the ground, in the absence of any conductive object, can be considered to be uniform (see Figure 2).

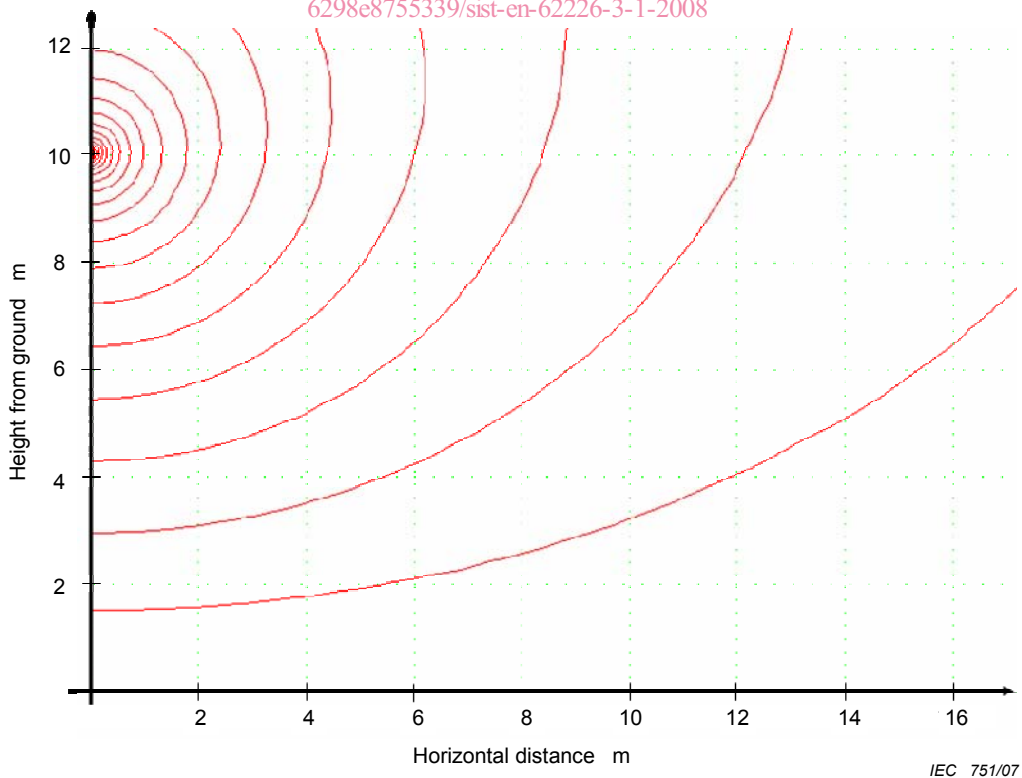

**Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres)**

### 3 General procedure

#### 3.1 Shape factor

In the low and intermediate frequency range, the relation between the induced current in the human body ( $J$ ) and a uniform electric field ( $E_0$ ) can be reduced to:

$$J = K_E \cdot f \cdot E_0 \quad (2)$$

Where:

$f$  is the frequency;

$E_0$  is the magnitude of the unperturbed electric field;

$K_E$  is defined as the “*shape factor for the electric field*”.

$K_E$  is dependant on the size, the conductivity, the form and the position of the model of the human body. It is also dependant on the location within the body where the induced current density is evaluated.  $K_E$  is independent of the frequency for analytical assessment of the induced current produced by electric fields (see Annex A).

$K_E$  is given in units of  $A \cdot s \cdot V^{-1} \cdot m^{-1}$  or Farad per metre (F/m), which relates to the fact that the exposure to the electric field corresponds physically to a capacitive coupling between the field source and the conductive object exposed to the field.

#### 3.2 Procedure

The current density inside an individual can be estimated analytically, following a three stage process. The first stage is to compute the current density in a semi-spheroid, whose dimensions are chosen to best represent the particular body. As it will be shown in 5.3 of this standard, the current density is uniform throughout the spheroid but depends on the ratio  $L/R$  of its semi-major axis and semi-minor axis.

The second stage is to use a realistic axisymmetrical model of a human body to determine the current density as a function of vertical position within the body.

The third stage is to convert the average current density at a particular vertical position to the local current density in the different tissues at that height. Health guidelines on exposure to EMF refer specifically to current density in the central nervous system, so the particular area of interest within the body is the spinal cord in the neck, due to the small cross section of the neck, which concentrates the current in that region.

Induced currents are calculated for men and women as well as children using reference values for their height, mass and surface area published by ICRP [38]. Sufficient information is given here to apply the method to persons of any weight and height.

Numerical calculations are also presented demonstrating the validity of the analytical procedure.