



Designation: D 613 – 95

An American National Standard



Designation: 41/99

Standard Test Method for Cetane Number of Diesel Fuel Oil¹

This standard is issued under the fixed designation D 613; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method determines the rating of diesel fuel oil in terms of an arbitrary scale of cetane numbers using a standard single cylinder, four-stroke cycle, variable compression ratio, indirect injected diesel engine.

1.2 The cetane number scale covers the range from zero (0) to 100 but typical testing is in the range of 30 to 65 cetane number.

1.3 The values for operating conditions are stated in SI units and are considered standard. The values in parentheses are the historical inch-pounds units. In addition, the engine measurements continue to be in inch-pounds units because of the extensive and expensive tooling that has been created for these units.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* For more specific hazard statements, see Note 1, Note 2, Note 4, Note 5, Note 6, Note 7, Note 8, Note 9, and Annex A1.

2. Referenced Documents

2.1 ASTM Standards:

D 975 Specification for Diesel Fuel Oils²

D 1193 Specification for Reagent Water³

D 2500 Test Method for Cloud Point of Petroleum Oils²

D 4057 Practice for Manual Sampling of Petroleum and Petroleum Products⁴

D 4175 Terminology Relating to Petroleum, Petroleum Products, and Lubricants⁴

E 1 Specification for ASTM Thermometers⁵

E 542 Practice for Calibration of Laboratory Volumetric Apparatus⁶

E 832 Specification for Laboratory Filter Papers⁶

3. Terminology

3.1 Definitions:

3.1.1 *cetane number, n*—a measure of the ignition performance of a diesel fuel oil obtained by comparing it to reference fuels in a standardized engine test. **D 4175**

3.1.1.1 *Discussion*—In the context of this method, ignition performance is understood to mean the ignition delay of the fuel as determined in a standard test engine under controlled conditions of fuel flow rate, injection timing and compression ratio.

3.1.2 *compression ratio, n*—the ratio of the volume of the combustion chamber including the precombustion chamber with the piston at bottom dead center to the comparable volume with the piston at top dead center.

3.1.3 *ignition delay, n*—that period of time, expressed in degrees of crank angle rotation, between the start of fuel injection and the start of combustion.

3.1.4 *injection timing (injection advance), n*—that time in the combustion cycle, measured in degrees of crank angle, at which fuel injection into the combustion chamber is initiated.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *handwheel reading, n*—an arbitrary numerical value, related to compression ratio, obtained from a micrometer scale that indicates the position of the variable compression plug in the precombustion chamber of the engine.

3.2.2 *cetane meter (ignition delay meter), n*—the electronic instrument which displays injection advance and ignition delay derived from input pulses of multiple transducers (pickups).

3.2.3 *injector opening pressure, n*—the fuel pressure that overcomes the resistance of the spring which normally holds the nozzle pintle closed, and thus forces the pintle to lift and release an injection spray from the nozzle.

3.2.4 *reference pickups, n*—transducer(s) mounted over the flywheel of the engine, triggered by a flywheel indicator, used to establish a top-dead-center (tdc) reference and a time base for calibration of the ignition delay meter.

¹ This test method is under the jurisdiction of ASTM Committee D-2 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.01 on Combustion Characteristics.

Current edition approved Sept. 10, 1995. Published November 1995. Originally published as D 613 – 41. Last previous edition D 613 – 93.

² *Annual Book of ASTM Standards*, Vol 05.01.

³ *Annual Book of ASTM Standards*, Vol 11.01.

⁴ *Annual Book of ASTM Standards*, Vol 05.02.

⁵ *Annual Book of ASTM Standards*, Vol 14.03.

⁶ *Annual Book of ASTM Standards*, Vol 14.02.

3.2.5 *injector pickup, n*—transducer to detect motion of the injector pintle, thereby indicating the beginning of injection.

3.2.6 *combustion pickup, n*—pressure transducer exposed to cylinder pressure to indicate the start of combustion.

3.2.7 *primary reference fuels, n*—*n*-cetane, heptamethyl nonane (HMN) and volumetrically proportioned mixtures of these materials which now define the cetane number scale by the relationship:

$$\text{Cetane Number} = \% n\text{-cetane} + 0.15 (\% \text{HMN}) \quad (1)$$

3.2.7.1 *Discussion—1*—*In the context of this method*, the arbitrary cetane number scale was originally defined as the volume percent of *n*-cetane in a blend with alpha-methylnaphthalene (AMN) where *n*-cetane had an assigned value of 100 and AMN an assigned value of zero (0). A change from alpha-methylnaphthalene to heptamethylnonane as the low cetane ingredient was made in 1962 to utilize a material of better storage stability and availability. Heptamethylnonane was determined to have a cetane number of 15 based on engine calibration by the ASTM Diesel National Exchange Group, using blends of *n*-cetane and AMN as primary reference fuels.

3.2.7.2 *Discussion—2*—*In the context of this method*, the Diesel National Exchange Group of Subcommittee D02.01⁷ is composed of petroleum industry, governmental, and independent laboratories. It conducts regular monthly exchange sample analyses to generate precision data for this engine test standard and calibrates reference materials used by all laboratories.

3.2.8 *secondary reference fuels, n*—volumetrically proportioned blends of two selected hydrocarbon mixtures designated *T Fuel* (high cetane) and *U Fuel* (low cetane) where each numbered, paired set of *T Fuel* and *U Fuel* is calibrated by the ASTM Diesel National Exchange Group in various combinations by comparison to primary reference fuel blends.

3.2.9 *check fuels, n*—diesel fuel oils calibrated by the ASTM Diesel National Exchange Group which provide a guide for an individual laboratory to check the cetane rating performance of a specific engine unit.

4. Summary of Test Method

4.1 The cetane number of a diesel fuel oil is determined by comparing its combustion characteristics in a test engine with those for blends of reference fuels of known cetane number under standard operating conditions. This is accomplished using the bracketing handwheel procedure which varies the compression ratio (handwheel reading) for the sample and each of two bracketing reference fuels to obtain a specific ignition delay permitting interpolation of cetane number in terms of handwheel reading.

5. Significance and Use

5.1 The cetane number provides a measure of the ignition characteristics of diesel fuel oil in compression ignition engines.

5.2 This test is used by engine manufacturers, petroleum refiners and marketers, and in commerce as a primary specification measurement related to matching of fuels and engines.

⁷ Bylaws governing ASTM Subcommittee D02.01 on Combustion Characteristics are available from the Subcommittee D02.01 on Combustion Characteristics Chairman or by contacting ASTM Headquarters for address reference.

5.3 Cetane number is determined at constant speed in a precombustion chamber type compression ignition test engine. The relationship of test engine performance to full scale, variable speed, variable load engines is not completely understood.

5.4 This test may be used for unconventional fuels such as synthetics, vegetable oils, and the like. However, the relationship to the performance of such materials in full scale engines is not completely understood.

6. Interferences

6.1 Certain gases and fumes present in the area where the cetane test engine is located may have a measurable effect on the cetane number test result.

6.2 This test method is not suitable for rating diesel fuel oils with fluid properties that interfere with unimpeded gravity flow of fuel to the fuel pump or delivery through the injector nozzle.

7. Apparatus

7.1 *Engine Equipment*⁸—This test method uses a single cylinder engine which consists of a standard crankcase with fuel pump assembly, a cylinder with separate head assembly of the precombustion type, thermal syphon recirculating jacket coolant system, multiple fuel tank system with selector valving, injector assembly with specific injector nozzle, electrical controls, and a suitable exhaust pipe. The engine is belt connected to a special electric power-absorption motor which acts as a motor driver to start the engine and as a means to absorb power at constant speed when combustion is occurring (engine firing). See Fig. 1.

7.1.1 See Annex A2, Engine Equipment Description and Specifications, for detail and description of all critical, non-critical and equivalent engine equipment.

7.2 *Instrumentation*⁸—This test method uses an electronic instrument to measure injection and ignition delay timing as well as conventional thermometry, gages and general purpose meters.


7.2.1 *A Cetane Meter* (Ignition Delay Meter) is critical and shall be used for this test method.

7.2.2 See Annex A3, Instrumentation Description and Specifications, for detail and description of all critical, non-critical and equivalent instrumentation.

7.3 *Reference Fuel Dispensing Equipment*—This test method requires repeated volumetric blending of two secondary reference fuel materials on an as-needed basis. Measurement shall be performed accurately because rating error is proportional to blending error. A set of two burets or accurate volumetric ware shall be used and the desired batch quantity shall be collected in a glass, metal or selected plastic container and thoroughly mixed before being introduced to the engine fuel system.

7.3.1 Calibrated burets or volumetric ware having a capacity of 400 or 500 mL and a maximum volumetric tolerance of $\pm 0.2\%$ shall be used. Calibration shall be verified in

⁸ Engine equipment and instrumentation are available from the single source manufacturer, Waukesha Engine Division, Dresser Industries, Inc., 1000 West St. Paul Avenue, Waukesha, WI 53188, FAX 414-549-2960 Waukesha Engine Division also has authorized sales and service organizations in selected geographical areas.

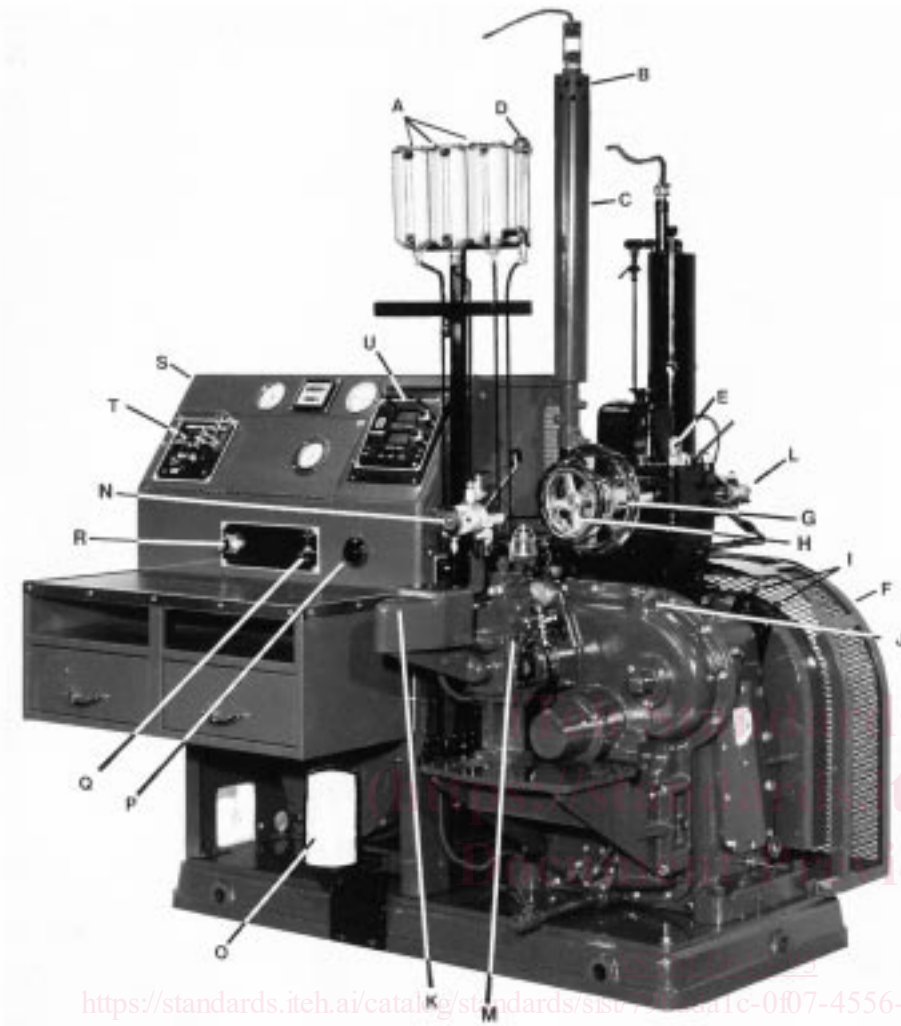

- A—Fuel Tanks
- B—Air Heater Housing
- C—Air Intake Silencer
- D—Fuel Flow Rate Buret
- E—Combustion Pickup
- F—Safety Guard
- G—Variable Compression Plug Handwheel
- H—V.C.P. Locking Handwheel
- I—Flywheel Pickups
- J—Oil Filler Cap
- K—Injection Pump Safety Shut-Off Solenoid
- L—Injector Assembly
- M—Fuel Injection Pump
- N—Fuel Selector-Valve
- O—Oil Filter
- P—Crankcase Oil Heater Control
- Q—Air Heater Switch
- R—Engine Start-Stop Switch
- S—Instrument Panel
- T—Intake Air Temperature Controller
- U—Dual Digital Cetane Meter

FIG. 1 Cetane Method Test Engine Assembly

accordance with Practice E 542.

7.3.1.1 Calibrated burets shall be outfitted with a dispensing valve and delivery tip to accurately control dispensed volume. The delivery tip shall be of such size and design that shut-off tip discharge does not exceed 0.5 mL.

7.3.1.2 The rate of delivery from the dispensing system shall not exceed 500 mL per 60 s.

7.3.2 See Appendix X1, Reference Fuel Blending Apparatus and Procedures, for typical dispensing system information.

7.4 Auxiliary Apparatus:

7.4.1 *Injector Nozzle Tester*—The injector nozzle assembly shall be checked whenever the injector nozzle is removed and reassembled to ensure the initial pressure at which fuel is discharged from the nozzle is properly set. It is also important to inspect the type of spray pattern. Commercial injector nozzle testers which include a lever-operated pressure cylinder, fuel reservoir and pressure gage are available from several sources as common diesel engine maintenance equipment.

7.4.2 *Special Maintenance Tools*—a number of specialty tools and measuring instruments should be utilized for easy,

convenient and effective maintenance of the engine and testing equipment. Lists and descriptions of these tools and instruments are available from the manufacturers of the engine equipment and those organizations offering engineering and service support for this test method.

8. Reagents and Reference Materials

8.1 *Cylinder Jacket Coolant*—Water shall be used in the cylinder jacket for laboratory locations where the resultant boiling temperature shall be $100 \pm 2^\circ\text{C}$ ($212 \pm 3^\circ\text{F}$). Water with commercial glycol-based antifreeze added in sufficient quantity to meet the boiling temperature requirement shall be used when laboratory altitude dictates. A commercial multi-functional water treatment material should be used in the coolant to minimize corrosion and mineral scale that can alter heat transfer and rating results.

8.1.1 Water shall be understood to mean reagent water conforming to Type IV Specification of D 1193.

8.2 *Engine Crankcase Lubricating Oil*—An SAE 30 viscosity grade oil meeting service classification SF/CD or SG/CE

shall be used. It shall contain a detergent additive and have a kinematic viscosity of 9.3 to 12.5 cSt (mm² per s) at 100°C (212°F) and a viscosity index of not less than 85. Oils containing viscosity index improvers shall not be used. Multi-graded oils shall not be used.

8.3 Primary Reference Fuels:⁹

NOTE 1—**Warning:** Primary Reference Fuel—Combustible. Vapor Harmful. See Annex A1.

8.3.1 *n-Cetane* (*n*-hexadecane) with a minimum purity of 99.0 % as determined by chromatographic analysis shall be used as the designated 100 cetane number component.

8.3.2 *Heptamethylnonane*—(2,2,4,4,6,8,8-heptamethylnonane) with a minimum purity of 98 % as determined by chromatographic analysis shall be used as the designated 15 cetane number component.

8.4 *Secondary Reference Fuels*¹⁰ that have been engine calibrated by the ASTM Diesel National Exchange Group may be and typically are used for routine testing. The calibration data are incorporated in blend tables that list the cetane numbers assigned for various volume percentage blends of *T Fuel* and *U Fuel*.¹¹

NOTE 2—**Warning:** Secondary Reference fuel—Combustible. Vapor Harmful. See Annex A1.

8.4.1 *T Fuel*—diesel fuel with a cetane number typically in the range of 73 to 75.

8.4.2 *U Fuel*—diesel fuel with a cetane number typically in the range of 20 to 22.

8.4.3 Storage and use of *T Fuel* and *U Fuel* should be at temperatures above 0°C (32°F) to avoid potential solidification, particularly of *T Fuel*. Before a container that has been stored at low temperature is placed in service, it should be warmed to a temperature of at least 15°C (27°F) above its Cloud Point. It should be held at this temperature for a period of at least 30 min and then the container should be thoroughly remixed.

8.5 *Check Fuels*¹⁰—diesel fuel oils typical of Specification D 975 grade No. 2-D distillate fuel oil that have been engine calibrated by the ASTM Diesel National Exchange Group.

NOTE 3—**Warning:** Check Fuel—Combustible. Vapor Harmful. See Annex A1.

8.5.1 *Low Cetane Check Fuel*—with a cetane number typically in the range of 38 to 42.

8.5.2 *High Cetane Check Fuel*—with a cetane number typically in the range of 50 to 55.

9. Sampling

9.1 Samples shall be collected in accordance with Practice D 4057.

9.2 *Fuel Temperature*—Samples shall be brought to room temperature typically 18 to 32°C (65 to 90°F) before engine testing.

⁹ Primary Reference Fuels are available from a single supplier in the U.S., Humphrey Chemical Co., Devine Street, North Haven, CT 06473.

¹⁰ Secondary Reference and Check Fuels are available from a single supplier, Phillips 66 Company, A Division of Phillips Petroleum Company, Specialty Chemicals, 8th Floor, Adams Building, Bartlesville, OK 74004.

¹¹ Blend Tables for batches of *T Fuel* and *U Fuel* can be obtained from the fuel supplier or from ASTM where they are listed in Research Report RR-D02-1302.

9.3 *Filtration*—Samples may be filtered through a Type I, Class A filter paper at room temperature and pressure before engine testing. See Specification E 832.

10. Basic Engine and Instrument Settings and Standard Operating Conditions

10.1 *Installation of Engine Equipment and Instrumentation:* Installation of the engine and instrumentation requires placement of the engine on a suitable foundation and hook-up of all utilities. Engineering and technical support for this function is required, and the user shall be responsible to comply with all local and national codes and installation requirements.

10.1.1 Proper operation of the test engine requires assembly of a number of engine components and adjustment of a series of engine variables to prescribed specifications. Some of these settings are established by component specifications, others are established at the time of engine assembly or after overhaul and still others are engine running conditions that must be observed and/or determined by operator adjustment during the testing process.

10.2 Conditions Based on Component Specifications:

10.2.1 *Engine Speed:* 900 ± 9 rpm, when the engine is operating with combustion with a maximum variation of 9 rpm occurring during a rating. Engine speed when combustion is occurring shall not be more than 3 rpm greater than that for motoring without combustion.

10.2.2 *Valve Timing:* The engine uses a four-stroke cycle with two crankshaft revolutions for each complete combustion cycle. The two critical valve events are those that occur near top-dead-center (tdc); intake valve opening and exhaust valve closing. See Annex A4, Apparatus Assembly and Setting Instructions, for Camshaft Timing and Valve Lift Measurement Procedure.

10.2.2.1 Intake valve opening shall occur 10.0 ± 2.5° after-top-dead-center (atdc) with closing at 34° after-bottom-dead-center (abdc) on one revolution of the crankshaft and flywheel.

10.2.2.2 Exhaust valve opening shall occur 40 deg before-bottom-dead-center (bbdc) on the second revolution of the crankshaft or flywheel with closing at 15.0 ± 2.5° after-top-dead-center on the next revolution of the crankshaft or flywheel.

10.2.3 *Valve Lift:* Intake and exhaust cam lobe contours, while different in shape, shall have a contour rise of 6.223 to 6.350 mm (0.245 to 0.250 in.) from the base circle to the top of the lobe so that the resulting valve lift shall be 6.045 ± 0.05 mm (0.238 ± 0.002 in.). See Annex A4, Apparatus Assembly and Setting Instructions for Camshaft Timing and Valve Lift Measurement Procedure.

10.2.4 *Fuel Pump Timing:* Closure of the pump plunger inlet port shall occur at a flywheel crank angle between 300 and 306 deg. on the engine compression stroke when the fuel flow-rate-micrometer is set to a typical operating position and the variable timing device lever is at full advance (nearest to operator). See Annex A4, Apparatus Assembly and Setting Instructions, for detailed instructions on setting and checking the fuel pump timing.

10.2.5 *Fuel Pump Inlet Pressure:* A minimum fuel head established by assembly of the fuel tanks (storage reservoirs)

and flow rate measuring buret so that the discharge from them is 635 ± 25 mm (25 ± 1 in.) above the centerline of the fuel injection pump inlet.

10.3 Assembly Settings and Operating Conditions:

10.3.1 *Direction of Engine Rotation:* Clockwise rotation of the crankshaft when observed from the front of the engine.

10.3.2 *Injection Timing:* 13.0 deg before-top-dead-center (bt dc), for the sample and reference fuels.

10.3.3 *Injector Nozzle Opening Pressure:* 10.3 ± 0.34 MPa (1500 ± 50 psi).

10.3.4 *Injection Flow Rate:* 13.0 ± 0.2 mL/min (60 ± 1 s per 13.0 mL).

10.3.5 *Injector Coolant Passage Temperature:* $38 \pm 3^\circ\text{C}$ ($100 \pm 5^\circ\text{F}$).

10.3.6 Valve Clearances:

10.3.6.1 *Engine Stopped and Cold:* Clearance between the valve stem and valve rocker half-ball set to the following approximate measurements upon assembly before the engine is operated will typically provide the controlling engine running and hot clearance:

Intake Valve	0.075 mm (0.004 in.)
Exhaust Valve	0.330 mm (0.014 in.)

These clearances should ensure that both valves have sufficient clearance to cause valve seating during engine warmup. The adjustable-length valve push-rods shall be set so that the valve rocker adjusting screws have adequate travel to permit the final clearance setting.

10.3.6.2 *Engine Running and Hot:* The clearance for both intake and exhaust valves shall be set to 0.20 ± 0.025 mm (0.008 ± 0.001 in.), measured under standard operating conditions with the engine running at equilibrium conditions on a typical diesel fuel oil.

10.3.7 *Oil Pressure:* 172 to 207 kPa (25 to 30 psi). See Annex A4, Apparatus Assembly and Setting Instructions for the Adjusting Crankcase Lubricating Oil Pressure procedure.

10.3.8 *Oil Temperature:* $57 \pm 8^\circ\text{C}$ ($135 \pm 15^\circ\text{F}$).

10.3.9 *Cylinder Jacket Coolant Temperature:* $100 \pm 2^\circ\text{C}$ ($212 \pm 3^\circ\text{F}$).

10.3.10 *Intake Air Temperature:* $66 \pm 0.5^\circ\text{C}$ ($150 \pm 1^\circ\text{F}$).

10.3.11 *Basic Ignition Delay:* 13.0 deg for the sample and reference fuels.

10.3.12 Cylinder Jacket Coolant Level:

10.3.12.1 *Engine Stopped and Cold:* Treated water/coolant added to the cooling condenser—cylinder jacket to a level just observable in the bottom of the condenser sight glass will typically provide the controlling engine running and hot operating level.

10.3.12.2 *Engine Running and Hot:* Coolant level in the condenser sight glass shall be within ± 1 cm (0.4 in.) of the LEVEL HOT mark on the coolant condenser.

10.3.13 Engine Crankcase Lubricating Oil Level:

10.3.13.1 *Engine Stopped and Cold:* Oil added to the crankcase so that the level is near the top of the sight glass will typically provide the controlling engine running and hot operating level.

10.3.13.2 *Engine Running and Hot:* Oil level shall be approximately mid-position in the crankcase oil sight glass.

10.3.14 *Crankcase Internal Pressure:* As mentioned by a

gage or manometer connected to an opening to the inside of the crankcase through a snubber orifice to minimize pulsations, the pressure shall be less than zero (a vacuum) and typically from 25 to 150 mm (1 to 6 in.) of water less than atmospheric pressure. Vacuum shall not exceed 255 mm (10 in.) of water.

10.3.15 *Exhaust Back Pressure:* As measured by a gage or manometer connected to an opening in the exhaust surge tank or main exhaust stack through a snubber orifice to minimize pulsations, the static pressure should be as low as possible, but shall not create a vacuum nor exceed 254 mm (10 in.) of water differential in excess of atmospheric pressure.

10.3.16 *Exhaust and Crankcase Breather System Resonance:* The exhaust and crankcase breather piping systems shall have internal volumes and be of such length that gas resonance does not result. See Appendix X2, Operating Techniques, for a suitable procedure to determine if resonance exists.

10.3.17 *Piston Over-Travel:* Assembly of the cylinder to the crankcase shall result in the piston protruding above the top of the cylinder surface 0.381 ± 0.025 mm (0.015 ± 0.001 in.) when the piston is at top-dead-center. Proper positioning is accomplished through the use of plastic or paper gaskets, available in several thicknesses and selected by trial and error for assembly between the cylinder and crankcase deck.

10.3.18 *Belt Tension:* The belts connecting the flywheel to the absorption motor shall be tightened, after an initial break-in, so that with the engine stopped, a 2.25 kg (5 lb.) weight suspended from one belt half way between the flywheel and motor pulley shall depress the belt approximately 12.5 mm (0.5 in.).

10.3.19 *Setting Injector Nozzle Assembly Pressure and Spray Pattern Check:*

NOTE 4—Warning: Personnel shall avoid contact with the spray pattern from injector nozzles because of the high pressure which can penetrate the skin. Spray pattern performance checks shall be made in a hood or where adequate ventilation insures that inhalation of the vapors is avoided.

10.3.19.1 *Injector Opening or Release Pressure:* The pressure adjusting screw is adjustable and shall be set to release fuel at a pressure of 10.3 ± 0.34 MPa (1500 ± 50 psi). Check this setting using an injector nozzle bench tester, each time the nozzle is reassembled and after cleaning. Use of a commercial injector nozzle bench tester is recommended. See Annex A4, Apparatus Assembly and Setting Instructions, for procedural detail.

10.3.19.2 *Injector Spray Pattern:* Check the spray pattern for symmetry and characteristic by inspection of the impression of a single injection made on a piece of filter paper or other slightly absorbent material placed at a distance of approximately 7.6 cm (3 in.) from the nozzle. A typical spray pattern is illustrated in Fig. 2.

10.3.20 *Indexing Handwheel Reading:* Handwheel readings are a simple and convenient indication of engine compression ratio which is a critical variable in the cetane method of test. The actual compression ratio is not important but an indication of compression ratio which relates to cetane number is a useful guide for selecting reference fuels to bracket the sample of diesel fuel oil. The following procedure shall be used to index




FIG. 2 Typical Injector Spray Pattern

the handwheel reading when the engine is new or anytime the matched handwheel assembly/cylinder head combination is interchanged or mechanically reassembled. See Appendix X3, Maintenance Techniques, for handwheel assembly reworking instructions.

10.3.20.1 *Handwheel Micrometer Drum and Scale Setting:* Refer to Table 1 to select the appropriate handwheel reading to be used in aligning the drum and scale.

10.3.20.2 *Basic Setting of Variable Compression Plug:* Position the variable compression plug so that the flat surface is just visible and exactly in line with the edge of the threads of the combustion pickup hole, as verified with a straightedge.

10.3.20.3 *Setting Handwheel Reading:* Tighten the small locking handwheel snugly by hand to ensure that the variable compression plug is held in place in the bore. Loosen the lock nut of the large handwheel and remove the locking L-shaped key. Turn the large handwheel so that the edge of the drum is in alignment with the 1.000 graduation on the horizontal scale. Reinstall the L-shaped key in the nearest keyway slot of the large handwheel with the shorter leg in the handwheel. A slight shifting of the handwheel to achieve slot line-up will not affect the indexing. Tighten the lock nut hand-tight to hold the key in place. Remove the locating screw from the drum and rotate the drum so that the zero graduation mark is in line with the selected reading from Table 1. Locate the screw hole in the drum which lines up with the handwheel hub hole and reinstall the locating screw. Wrench tighten the large handwheel lock nut and recheck that the variable compression plug is properly positioned and the handwheel reading is in accordance with the value in Table 1.

10.3.21 *Basic Compression Pressure:* At a handwheel reading of 1.000, the compression pressure for an engine operated at standard barometric pressure of 760 mm Hg. (29.92 in. Hg) shall be 3275 ± 138 kPa (475 ± 20 psi) when read as quickly as possible after shutdown of the engine which had been at standard operating conditions. If the condition is not within limits, recheck the basic handwheel setting and, if necessary, perform mechanical maintenance. See Annex A4, Apparatus Assembly and Setting Instructions for the Checking Compression Pressure procedure.

10.3.21.1 For engines operated at other than standard barometric pressure, the compression pressure will typically be in

TABLE 1 Handwheel Setting for Various Cylinder Bore Diameters

Cylinder Diameter, in.		Handwheel Reading
3.250	(Standard Bore)	1.000
3.260	(Rebored 0.010 in. Oversize)	0.993
3.270	(Rebored 0.020 in. Oversize)	0.986
3.280	(Rebored 0.030 in. Oversize)	0.978

proportion to the ratio of the local barometric pressure divided by standard barometric pressure. As an example, an engine located where the barometric pressure is 710 mm Hg would be expected to have a compression pressure of approximately 3060 ± 138 kPa (444 ± 20 psi).

$$\text{Compression Pressure}_{(\text{Local Baro. mmHg})} = 3275 \text{ kPa} \times \frac{\text{Local Baro.}}{\text{Standard Baro.}} \quad (2)$$

$$\text{Example: Compression Pressure}_{710\text{mmHg}} = 3275 \times 710/760 = 3060 \text{ kPa}$$

NOTE 5—**Precaution:** In addition to other precautions, compression pressure testing using a compression pressure gage should be completed in as short a period of time as possible to avoid the possibility of combustion occurrence due to the presence of any small amount of oil in the gage or combustion chamber.

10.3.22 *Fuel Pump Lubricating Oil Level:* With the engine stopped, sufficient engine crankcase lubricating oil shall be added to the pump sump so that the level is at the mark on the dip stick.

NOTE 6—**Caution:** As a result of engine operation, especially when the pump barrel/plunger assembly begins to wear, the level in the sump will increase due to fuel dilution as observed through a clear plastic side plate on the pump housing. When the level rises appreciably, the sump should be drained and a fresh charge of oil added.

10.3.23 *Fuel Pump Timing Gear Box Oil Level:* With the engine stopped, unplug the openings on the top and at the mid-height of either side of the gear box. Add sufficient engine crankcase lubricating oil through the top hole to cause the level to rise to the height of the side opening. Replug both openings.

NOTE 7—**Caution:** The pump and timing gear box oil sumps are not connected to each other and the lubrication for the two is independent.

10.3.24 *Instrumentation:* Positioning of the reference pickups and injector pickup is important to ensure that timing of the injection and ignition delay functions is uniform and correct.

10.3.24.1 *Setting Reference Pickups:* These two pickups are identical and interchangeable. They are installed in a bracket positioned over the flywheel so that they clear the flywheel indicator which triggers them.

10.3.24.2 Position each pickup in the bracket so that it is properly referenced to the flywheel indicator in accordance with the instructions supplied with the specific pickup.

10.3.24.3 Measurement of pickup to flywheel indicator clearance, if required, shall be made using a non-magnetic feeler gage.

10.3.25 *Setting Injector Pickup Gap:* Set the air gap to typically 1 mm (0.040 in.) with the engine stopped.

10.3.25.1 Individual pickups may require more or less air gap to obtain steady meter operation when the engine is ultimately running but too little gap can cause the ignition delay angle display to drive off scale.

11. Calibration and Engine Qualification

11.1 *Engine Compliance:* It is assumed that the engine has been commissioned and that all settings and operating variables are at equilibrium and in compliance with basic engine and instrument settings and standard operating conditions.

11.1.1 Engine warmup requires typically 1 h to ensure that all critical variables are stable.

11.2 *Checking Performance on Check Fuels:* This engine

test does not have any satisfactory standardization fuel blend or blends to qualify the engine. The check fuels are the most helpful means available to permit judgement of good performance.

11.2.1 Test one or more of the Check Fuels.

11.2.2 Engine performance is judged satisfactory if the cetane rating obtained on a check fuel is within the tolerance limits calculated as follows:

$$\text{Tolerance Limits} = CN_{CF} \pm 1.5 \times S_{CF} \quad (3)$$

where:

CN_{CF} = the average Cetane Number of the Check Fuel calibration data,

1.5 = a selected tolerance limit factor (K) for normal distributions,

S_{CF} = the standard deviation of the Check Fuel calibration data.

11.2.2.1 *Discussion*—In the context of this method, the statistical tolerance limit factor (K), based on a sample size (n), permits an estimation of the percentage of engines that would be able to rate the Check Fuel within the calculated tolerance limits. Based on a calibration data set of 17 to 20 ratings, and a value of $K = 1.5$, it is estimated that in the long run, in 19 cases out of 20, at least 70 % of the engines would rate the Check Fuel within the calculated tolerance limits.

11.2.3 If the results are outside this tolerance range, the engine is not acceptable for rating samples and a check of all operating conditions is warranted followed by mechanical maintenance which may require critical parts replacement. The injector nozzle can be a very critical factor and this should be the first item checked or replaced to achieve rating compliance.

12. Procedure

12.1 *Bracketing by Handwheel Procedure*: See Appendix X2, Operating Techniques—Adjustment of Variables, for the details of engine operation and the adjustment of each of the individual operating variables.

12.1.1 Check that all engine operating conditions are in compliance and equilibrated with the engine running on a typical diesel fuel oil.

NOTE 8—Precaution: In addition to other precautions, always position the ignition delay meter (Mark II and earlier models) to CALIBRATE before proceeding with fuel switching so that violent meter needle full-scale pegging does not occur. Calibration adjustment should be checked before each rating but never changed during a rating.

12.1.2 Introduce the sample to an empty fuel tank, rinse the fuel buret, purge any air from the fuel line to the pump and position the fuel-selector valve to operate the engine on this fuel.

NOTE 9—Warning: Sample and Fuel—Combustible. Vapor Harmful. See Annex A1.

12.1.3 *Fuel Flow Rate*: Check the fuel flow rate and adjust the flow-rate-micrometer of the fuel pump to obtain 13 mL per min consumption. The final flow rate measurement shall be made over a full 60 ± 1 s period. Note the flow-rate-micrometer reading for reference.

12.1.4 *Fuel Injection Timing*: After establishing the fuel flow rate, adjust the injection-timing-micrometer of the fuel

pump assembly to obtain a 13.0 ± 0.2 deg injection advance reading. Note the injection-timing-micrometer reading for reference.

12.1.5 *Ignition Delay*: Adjust the handwheel to change the compression ratio and obtain a 13.0 ± 0.2 deg ignition delay reading. Make the final handwheel adjustment in the clockwise direction (viewed from front of engine) to eliminate backlash in the handwheel mechanism and a potential error.

12.1.6 *Equilibration*: It is important to achieve stable injection advance and ignition delay readings.

12.1.6.1 Stable readings should typically occur within 5 to 10 min.

12.1.6.2 The time used for the sample and each of the reference fuels should be consistent and shall not be less than 3 min.

12.1.7 *Handwheel Reading*: Observe and record the handwheel reading as the representative indication of the combustion characteristic for this fuel sample.

12.1.8 *Reference Fuel No. 1*: Select a secondary reference fuel (T Fuel and U Fuel) blend close to the estimated cetane number of the sample.

NOTE 10—The handwheel reading vs cetane number relationship based on this procedure is engine and overhaul dependent but it can be established for each engine as testing experience is gained after each overhaul. A plot or table of handwheel readings provides a simple guide to selection of the reference fuel.

12.1.8.1 Prepare a fresh 400 or 500 mL batch of the selected reference blend.

12.1.8.2 Introduce Reference Fuel No. 1 to one of the unused fuel tanks taking care to flush the fuel lines in the same manner as noted for the sample.

12.1.8.3 Perform the same adjustment and measurement steps used for the sample and record the resulting handwheel reading.

12.1.9 *Reference Fuel No. 2*: Select another secondary reference fuel blend which can be expected to result in a handwheel reading that causes the two reference fuel handwheel readings to bracket that for the sample. The difference between the two reference fuel blends shall not exceed 5.5 cetane numbers. Typically, blends differing by 5 volume percent T Fuel will span about 2.7 cetane numbers and those differing by 10 volume percent T Fuel will span about 5.3 cetane numbers.

12.1.9.1 Prepare a fresh 400 or 500 mL batch of the selected reference fuel blend.

12.1.9.2 Introduce Reference Fuel No. 2 to the third fuel tank taking care to flush the fuel lines in the same manner as noted for the sample.

12.1.9.3 Perform the same adjustment and measurement steps used for the sample and first reference fuel and record the resulting handwheel reading.

NOTE 11—Typically, the fuel-flow-rate should be the same for both reference fuels because they are sufficiently similar in composition.

12.1.9.4 If the handwheel reading for the sample is bracketed by those of the reference fuel blends, continue the test; otherwise try an additional reference fuel blend(s) until this requirement is satisfied.

12.1.10 *Repeat Readings*: After operation on a satisfactory

second reference fuel blend, perform the necessary steps to rerun Reference Fuel No. 1, then the sample and finally Reference Fuel No. 2. For each fuel, be certain to check all parameters carefully and allow operation to reach equilibrium before recording the handwheel readings. The fuel switching shall be as illustrated in Fig. 3 Sample and Reference Fuel Reading Sequence A.

12.1.10.1 If a sample is tested immediately following one for which the Reference Fuel No. 2 will be applicable, that reference fuel handwheel reading can be utilized for the new sample. The fuel switching shall thus be as illustrated in Fig. 3, Sample and Reference Fuel Reading Sequence B.

13. Calculation of Cetane Number

13.1 Calculate the average handwheel readings for the sample and each of the reference fuel blends.

13.2 Calculate the cetane number by interpolation of these average handwheel readings proportioned to the cetane numbers of the bracketing reference fuel blends in accordance with the appropriate equation (4). See Fig. 4.

13.2.1 For the Handwheel Bracketing Procedure:

$$CN_S = CN_{LRF} + \left(\frac{HW_S - HW_{LRF}}{HW_{HRF} - HW_{LRF}} \right) (CN_{HRF} - CN_{LRF}) \quad (4)$$


where:

- CN_S = Cetane Number of Sample,
- CN_{LRF} = Cetane Number of Low Reference Fuel,
- CN_{HRF} = Cetane Number of High Reference Fuel,
- HW_S = Handwheel Reading of Sample,
- HW_{LRF} = Handwheel Reading of Low Reference Fuel,
- HW_{HRF} = Handwheel Reading of High Reference Fuel.

13.2.2 Do not interpolate using reference fuel blend volume percent of *T Fuel* values and convert that equivalent percent to cetane number.

13.3 Round the calculated cetane number to the nearest tenth. Any cetane number ending in exactly 5 in the second

HANDWHEEL BRACKETING PROCEDURE

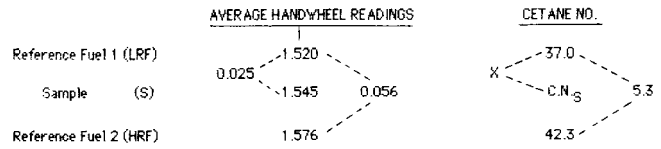

$$\begin{aligned}
 CN_S &= CN_{LRF} + \left(\frac{HW_S - HW_{LRF}}{HW_{HRF} - HW_{LRF}} \right) (CN_{HRF} - CN_{LRF}) \\
 &= 37.0 + \left(\frac{1.545 - 1.520}{1.576 - 1.520} \right) (42.3 - 37.0) \\
 &= 37.0 + (0.446)(5.3) = 39.4
 \end{aligned}$$

FIG. 4 Example of Cetane Number Calculations

decimal place shall be rounded to the nearest even tenth number; for example, round 35.55 and 35.65 to 35.6 cetane number.

14. Report

14.1 Report the calculated result as cetane number.

14.2 If the sample was filtered before testing, include this information in the report.

15. Precision and Bias


15.1 *Handwheel Bracketing Procedure Precision:* The precision of this test method and procedure based on statistical examination of interlaboratory test results is as follows:

15.1.1 *Repeatability:* The difference between two test results, obtained by the same operator with the same engine under constant operating conditions on identical test samples within the same day would, in the long run, in the normal and correct operation of the test method, exceed the values in Table 2 only in 1 case in 20.

15.1.2 *Reproducibility:* The difference between two single and independent results obtained by different operators in different laboratories on identical test samples would, in the long run, in the normal and correct operation of the test method, exceed the values in Table 2 only in 1 case in 20.

15.1.3 Repeatability precision limits are based on the ASTM National Exchange Group (NEG) monthly sample testing program data from mid-1978 through 1987. During this period each exchange sample was rated twice on the same day

SAMPLE AND REFERENCE FUEL READING SEQUENCE A

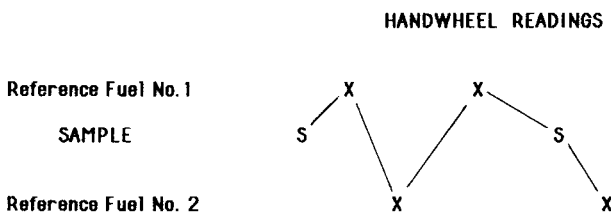

SAMPLE AND REFERENCE FUEL READING SEQUENCE B

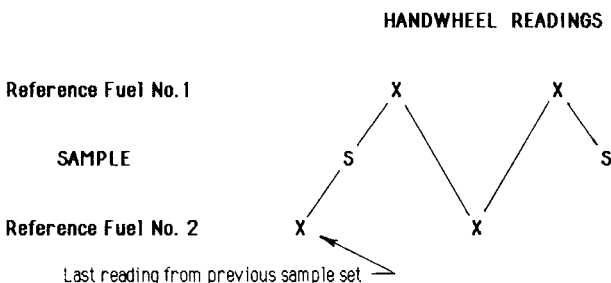


FIG. 3 Sample and Reference Fuel Reading Sequence

TABLE 2 Cetane Number Repeatability and Reproducibility Limits

Average Cetane Number Level ^A	Repeatability Limits, Cetane Number	Reproducibility Limits Cetane Number
40	0.8	2.8
44	0.9	3.3
48	0.9	3.8
52	0.9	4.3
56	1.0	4.8

^AValues for cetane numbers intermediate to those listed above, may be obtained by linear interpolation.

by the same operator on one engine in each of the Member laboratories.¹²

15.1.4 Reproducibility precision limits are based on the combined NEG monthly sample testing program data from mid-1978 through mid-1992, the Institute of Petroleum monthly sample data for 1988 through mid-1992 and the Institut Francais du Petrole monthly sample data for 1989 through early 1992.

15.1.5 The combination of the large number of sample sets and the fact that each sample is tested by 12 to 25 laboratories

provides a comprehensive picture of the precision achievable using this test method. Analyzed graphically, the respective sample standard deviations were plotted vs cetane number. The variation in precision with respect to cetane number level for these data is best expressed by a linear regression of the values. The average standard deviation for each cetane number level has been multiplied by 2.772 to obtain the respective limit values.

15.2 *Bias*—The procedure in this test method for Cetane Number of Diesel Fuel Oil has no bias because the value of cetane number can be defined only in terms of the test method.

16. Keywords

16.1 cetane number; diesel performance; ignition delay

¹² See Research Report D02-1303 for a listing of the data and the analyses used to establish the precision statements.

ANNEXES

(Mandatory Information)

A1. HAZARDS INFORMATION

A1.1 Introduction

A1.1.1 In the performance of the standard test method there are hazards to personnel. These are indicated in the text. The classification of the hazard, Warning, Caution, or Precaution is noted with appropriate key words of definition. More detailed information regarding these hazards is included in this Annex.

A1.2 Warning: Combustible. Vapor Harmful

Keep away from heat, sparks, and open flame.

Keep container closed.

Use adequate ventilation.

Avoid breathing vapor or spray mist.

Avoid prolonged or repeated contact with skin.

A1.2.1 *Applicable Substances:*

diesel fuel oil

reference material

reference fuel

n-cetane

heptamethylnonane

alpha-methylnaphthalene

secondary reference fuels, *T Fuel* and *U Fuel*

check fuel

kerosine
warmup fuel
lubricating oil

A1.3 Warning: Flammable. Vapors Harmful if Inhaled. Vapors May Cause Flash Fire.

Keep away from heat, sparks, and open flame

Keep container closed.

Use adequate ventilation.

Avoid build-up of vapors.

Avoid prolonged breathing of vapor or spray mist.

Avoid prolonged or repeated skin contact.

A1.3.1 *Applicable Substances:*

petroleum based solvent.

A1.4 Warning: Poison. May be Harmful or Fatal if Inhaled or Swallowed.

Vapors harmful, emits toxic fumes when heated.

Do not take internally.

Do not breath vapor.

Dispose in accordance with hazardous waste regulations.

A1.4.1 *Applicable Substances:*

ethylene glycol based antifreeze

A2. ENGINE EQUIPMENT DESCRIPTION AND SPECIFICATIONS

A2.1 Engine Equipment

A2.1.1 The single cylinder cetane test engine is manufactured as a complete unit by Waukesha Engine Division, Dresser Industries, Inc. and consists of both critical and non-critical equipment. The Waukesha Engine Division designation is Model CFR F-5 Cetane Method Diesel Fuel Rating Unit. Waukesha Engine Division Part Numbers or References are included in parenthesis after the items where applicable.

A2.1.1.1 See Table A2.1, General Engine Characteristics and Information.

A2.2 **Critical Equipment**—Critical engine components and primary assemblies which shall be used for this test method are listed. The bearings, gears, seals, covers, special fittings or hardware and gaskets manufactured by Waukesha Engine Division and applicable to each critical assembly shall also be considered critical.

A2.2.1 *Crankcase Assembly*—Model CFR-48 (109520D) specified to include the following major items (See Fig. A2.1):

A2.2.1.1 Crankshaft Assembly (A109511H).

A2.2.1.2 Piston Assembly (0023204B).

TABLE A2.1 General Engine Characteristics and Information

Item	Description
Crankcase	Model CFR-48 (Preferred), High or Low Speed Models (Optional)
Cylinder Type	Single bore cast iron with integral coolant jacket
Cylinder Head Type	Cast Iron with turbulence precombustion chamber, variable compression plug passage, integral coolant passages, and in-head valve assembly
Compression Ratio	Adjustable 8:1 to 36:1 by external handwheel assembly
Cylinder Bore (Diameter), in.	3.250 (Standard), Reboring to 0.010, 0.020, 0.030 over is acceptable
Stroke, in.	4.50
Displacement, cu in	37.33
Valve Mechanism	In-head with enclosure
Intake and Exhaust Valves	Stellite faced, plain type without shroud
Piston	Cast iron, flat top
Piston Rings:	
Compression Type	4, Ferrous, straight sided (Top may be chrome plated—Optional)
Oil Control	1, Cast iron, one piece, slotted (Type 85)
Camshaft Over lap, deg	5
Fuel System	Injection pump with variable timing device and injector
Injector	Holder with by-pass pressure release valve
Spray Nozzle	Closed, differential-needle, hydraulically-operated, pintle type
Weight of Engine	Approximately 400 kg (880 lb.)
Weight of Complete Test Unit	Approximately 1250 kg (2750 lb.)

A2.2.1.3 Rings, Piston, Compression, Straight (106222A), 4 required.

NOTE A2.1—Ring, Piston, Compression, Straight, Chrome (106222B), Use of a chrome ring in the top groove is optional with 3 compression rings (106222A) in the other 3 compression ring grooves.

A2.2.1.4 Ring, Piston, Oil (23505).

A2.2.1.5 Connecting Rod Assembly (BA111666).

A2.2.1.6 Camshaft (109583B).

A2.2.1.7 Balancing Shaft, 2 required (109510A).

A2.2.1.8 Counterweight for Balancing Shaft, (109565) 2 required.

A2.2.1.9 Flywheel (109501H) (applicable for 50 or 60 Hz units).

A2.2.1.10 Oil Pump Assembly (110150A).

A2.2.1.11 Oil Suction Screen Assembly (0109552).

A2.2.1.12 Oil Pressure Control Valve Assembly (A109538A).

A2.2.1.13 Crankcase Breather Assembly (Group 070.00).

A2.2.1.14 Accessory Bracket, Fuel Pump (109515A).

A2.2.1.15 Stud Assembly, Crankcase to Cylinder (B839.4 required; B5764.2 required).

A2.2.1.16 Stud Nuts, Cylinder (105361, 6 required).

A2.2.2 *Cylinder Assembly*—(0105081) of cast iron with internal coolant passages and a basic bore diameter of 3.250 in., specified to include the following (See Fig. A2.2):

A2.2.2.1 Stud Assembly, Cylinder to Head (B-8200, 5 required).

A2.2.2.2 Stud Nuts, Cylinder Head (105361, 7 required).

A2.2.2.3 Crankcase to Cylinder Spacer Gasket Set—Selection of one or more gaskets must be made at the time of cylinder assembly to achieve the specified piston over travel. Available gaskets are:

Gasket, Cylinder Base—0.021 in. thick (105181)

Gasket, Cylinder Base—0.015 in. thick (105181A)

Gasket, Cylinder Base—0.010 in. thick (105181B)

Gasket, Cylinder Base—0.003 in. thick (105181C)

A2.2.3 *Cylinder Head Assembly*—(AF105082B) of cast iron with internal coolant passages, a flat-top combustion chamber surface, a horizontal and cylindrical precombustion chamber to accept a matched and pinned, variable compression ratio handwheel housing on one end and including a passage for insertion of an injector assembly at the other end. An angled passage, 0.5 in. square in cross-section, connects the precombustion chamber to the main combustion chamber. The assembly is specified to include the following major items (See Fig. A2.2 and Fig. A2.3):

A2.2.3.1 Integral but replaceable, hardened, Valve Seat Inserts (105987A),

A2.2.3.2 Integral but replaceable Valve Guides (23109A),

A2.2.3.3 Intake and Exhaust Valve (106625),

A2.2.3.4 Valve Spring, Rotator Assembly (G-806-3) including spring (109659), spacer (110200), felt (B4680), rotator (110165B) and tapers (109658),

A2.2.3.5 Valve Rocker Arm Subassembly (Group G-002.10).

A2.2.4 *Handwheel*—Variable Compression Plug Assembly—(A105097) including an expandable plug that is screwed in or out of the handwheel housing, an adjusting handwheel, a micrometer scale and barrel vernier to indicate plug position, and a locking wheel to cause a dished, split-washer to flatten and expand the variable compression plug to seal the precombustion chamber. See Fig. A2.3.

A2.2.5 *Cylinder Coolant System Assembly*, specified to include the following major items.

A2.2.5.1 Condenser Body Assembly (A109264A) including condenser coil subassembly, baffle tube and sight glass subassembly.

A2.2.5.2 Condenser Water Pipe Assembly (0109131B).

A2.2.5.3 Water Inlet Pipe (105083).

A2.2.6 *Inlet Air System Assembly* (Group G-841-9) specified to include the following major items:

A2.2.6.1 Air Silencer Elbow (105188), with gaskets, nuts and washers.

A2.2.6.2 Air Heater Silencer Assembly (AA110468).

A2.2.6.3 Air Inlet Heater Assembly (A106583E).

A2.2.7 *Fuel System*—Components required to permit constant pressure introduction of sample or reference fuel blends to an injection pump, the injection pump with adjustment for flow rate, an integral variable timing device, a pump gallery air trap device, a high pressure fuel delivery tubing and an injector nozzle assembly with mechanism to permit sensing of the time of injection. Critical Equipment is specified to include the following major items:

A2.2.7.1 Fuel Injection Pump Assembly (C106941C), Bosch specification APE 1B-50P-5625C Injection Pump equipped with a 5 mm Barrel and Plunger Assembly (110754).

A2.2.7.2 Fuel Selector-Valve Assembly (A111388) including pump inlet fitting (105303A).

A2.2.7.3 Fuel Line Air Trap Assembly (Group G-808-9) including pump outlet fitting (105302).