

SLOVENSKI STANDARD

SIST EN 3543:2001

01-januar-2001

Aerospace series - Screws, 100- countersunk normal head, offset cruciform recess, close tolerance normal shank, short thread, in heat and corrosion resisting steel, passivated - Classification: 1 100 MPa (at ambient temperature)/425°C

Aerospace series - Screws, 100° countersunk normal head, offset cruciform recess, close tolerance normal shank, short thread, in heat and corrosion resisting steel, passivated - Classification: 1 100 MPa (at ambient temperature)/425°C

Luft- und Raumfahrt - 100° Senk-Paßschrauben mit Flügelkreuzschlitz, kurzes Gewinde, aus korrosionsbeständigem und hochwärmestem Stahl, passiviert - Klasse: 1 100 MPa (bei Raumtemperatur)/425°C

Série aéronautique - Vis à tête fraisée 100° normale, à empreinte cruciforme déportée, tige normale à tolérance serrée, filetage court, en acier résistant à chaud et à la corrosion, passivées - Classification: 1 100 MPa (à température ambiante)/425°C

Ta slovenski standard je istoveten z: EN 3543:1997

ICS:

49.030.20 Sorniki, vijaki, stebelni vijaki Bolts, screws, studs

SIST EN 3543:2001

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3543:2001

<https://standards.iteh.ai/catalog/standards/sist/74156ca4-d46c-47bc-9f86-6883563ad180/sist-en-3543-2001>

EUROPEAN STANDARD

EN 3543

NORME EUROPÉENNE

EUROPÄISCHE NORM

January 1997

ICS 49.040.20

Descriptors: aircraft industry, screw, countersunk head screw, cross recessed screw, heat resistant steel, corrosion resistant steel, specification, dimension, dimensional tolerance, surface treatment, designation, marking

English version

**Aerospace series - Screws, 100° countersunk
normal head, offset cruciform recess, close
tolerance normal shank, short thread, in heat and
corrosion resisting steel, passivated -
Classification : 1 100 MPa (at ambient
temperature)/425°C**

Série aéronautique - Vis à tête fraisée 100°
normale, à empreinte cruciforme déportée, tige
normale à tolérance serrée, filetage court, en
acier résistant à chaud et à la corrosion,
passivées - Classification : 1 100 MPa (à
température ambiante)/425°C

Luft- und Raumfahrt - 100° Senk-Paßschrauben
mit Flügelkreuzschlitz, kurzes Gewinde, aus
korrosionsbeständigem und hochwarmfestem Stahl,
passiviert - Klasse : 1 100 MPa (bei
Raumtemperatur)/425°C

<https://standards.iteh.ai/catalog/standards/sist/74156ca4-d46c-47bc-9f86-6883563ad180/sist-en-3543-2001>

This European Standard was approved by CEN on 1996-12-11. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Page 2
EN 3543:1997

Foreword

This European Standard has been prepared by the European Association of Aerospace Manufacturers (AECMA).

After inquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 1997, and conflicting national standards shall be withdrawn at the latest by July 1997.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

ITeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3543:2001

<https://standards.iteh.ai/catalog/standards/sist/714f56ca-d46c-47bc-9f86-7107c71f3676/EN-3543-1997>

THIS DOCUMENT IS A PREVIEW
OF THE STANDARD EN 3543-1997
AVAILABLE ON THE ITeH PLATFORM

.....T010

EVTEADJASR0 KISTEM 04 Y19984

1 Scope

This standard specifies the characteristics of screws, 100° countersunk normal head, offset cruciform recess, close tolerance normal shank, short thread, in heat and corrosion resisting steel, passivated.

Classification : 1 100 MPa ¹⁾ / 425 °C ²⁾

2 Normative references

This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- ISO 3353 Aerospace - Rolled threads for bolts - Lead and runout requirements
- ISO 5855-2 Aerospace - MJ threads - Part 2 : Limit dimensions for bolts and nuts
- ISO 5856 Aerospace - Screws, 100° normal countersunk head, internal offset cruciform ribbed drive, normal shank, short or medium length MJ threads, metallic material, coated or uncoated, strength classes less than or equal to 1 100 MPa - Dimensions
- ISO 7913 Aerospace - Bolts and screws metric - Tolerances of form and position
- ISO 7994 Aerospace - Internal drive, offset cruciform recess (Torq-Set[®]) for rotary fastening devices - Metric series
- ISO 8168 Aerospace - Corrosion- and heat-resisting steel bolts with strength classification 1 100 MPa and MJ threads - Procurement specification
- EN 2000 Aerospace series - Quality assurance - EN aerospace products - Approval of the quality system of manufacturers
- EN 2424 Aerospace series - Marking of aerospace products
- EN 2516 Aerospace series - Passivation of corrosion resistant steels and decontamination of nickel base alloys ³⁾
- EN 3042 Aerospace series - Quality assurance - EN aerospace products - Qualification procedure
- EN 4016 Aerospace series - Oversized bolts ³⁾
- TR 3775 Aerospace series - Bolts and pins - National materials ⁴⁾

1) Minimum tensile strength of the material at ambient temperature

2) Maximum temperature that the screw can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the material.

3) Published as AECMA Standard at the date of publication of this standard

4) Published as AECMA Technical Report at the date of publication of this standard

3 Required characteristics

3.1 Configuration - Dimensions - Masses

See figure 1 and table 1.

Dimensions and tolerances are : in conformity with ISO 5856, expressed in millimetres and apply after surface treatment.

3.2 Tolerances of form and position

ISO 7913

3.3 Materials

TR 3775 (heat and corrosion resisting steel, strength class 1 100 MPa)

3.4 Surface treatment

EN 2516

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3543:2001

<https://standards.iteh.ai/catalog/standards/sist/74156ca4-d46c-47bc-9f86-6883563ad180/sist-en-3543-2001>

$3,2 \sqrt{0,8}$ [Values in micrometres apply prior to surface treatment.]

Break sharp edges 0,1 to 0,4.

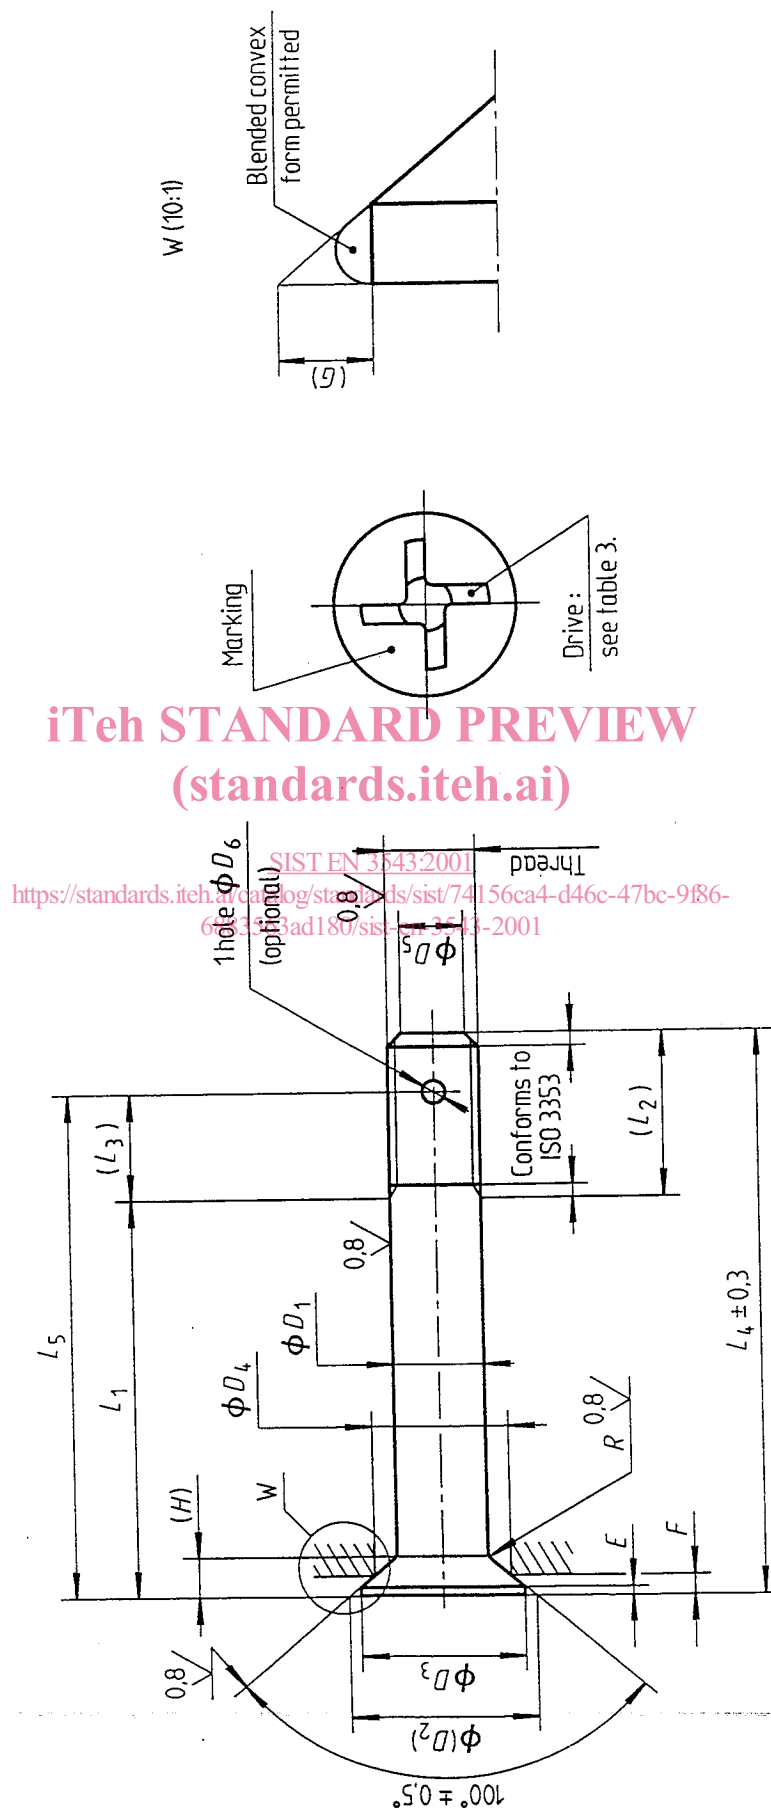


Figure 1

Table 1

Diameter code	Thread 1)	D_1 f7	D_2 max.	D_3 min.	D_4	D_5		D_6 H13	E min.	F 0 - 0,08	G	H	$L_1 \pm 0,2$ 2) 3)		L_2	L_3	R		Mass 4)	
						nom.	Tol.						Code	nom.			nom.	Tol.	5)	6)
030	MJ3x0,5-4h6h	3	6	5,4	4,5	2,3	0	—	0,06	0,63	0,3	1,27	003 to 030	3 to 30	6	—	0,4	—	0,54	0,055
040	MJ4x0,7-4h6h	4	8	7,2	5,78	3	- 0,5	1,1	0,08	0,93	0,4	1,69	003 to 040	3 to 40	7,5	5	0,4	—	1,13	0,099
050	MJ5x0,8-4h6h	5	10	9	7,71	3,4	—	1,5	—	0,96	0,5	2,12	004 to 050	4 to 50	9	6	0,5	0	2,21	0,153
060	MJ6x1-4h6h	6	12	10,8	9	4,2	—	—	—	1,26	—	2,54	005 to 060	5 to 60	10	7	0,7	- 0,2	3,72	0,222
070	MJ7x1-4h6h	7	14	12,8	10,28	5,2	—	1,9	—	1,57	—	2,96	006 to 070	6 to 70	11	—	—	—	5,83	0,302
080	MJ8x1-4h6h	8	16	14,8	12,21	6,2	—	—	—	1,6	—	3,39	006 to 080	6 to 80	11,5	7,5	—	—	7,71	0,395
100	MJ10x1,25-4h6h	10	20	18,8	15,43	7,9	± 0,5	2,4	0,1	1,93	—	4,23	008 to 100	8 to 100	14,5	9	0,8	—	16,2	0,616
120	MJ12x1,25-4h6h	12	24	22,8	18	9,8	—	—	—	2,53	0,6	5,08	010 to 120	10 to 120	16	10	0,9	—	27,5	0,887
140	MJ14x1,5-4h6h	14	28	26,8	20,57	11,5	—	3	—	3,14	—	5,93	010 to 140	10 to 140	19	12	1,1	0	40,8	1,208
160	MJ16x1,5-4h6h	16	32	30,8	24,43	13,5	—	—	—	3,2	—	6,77	010 to 160	10 to 160	20,5	12,5	—	—	59,0	1,578
180	MJ18x1,5-4h6h	18	36	34,8	25,71	15,5	—	3,8	—	4,35	—	7,62	011 to 180	11 to 180	22,5	14,5	1,3	- 0,3	83,1	1,997
200	LJ20x1,5-4h6h	20	40	38,8	28,92	17,5	—	—	—	4,68	—	8,47	012 to 200	12 to 200	24,5	15	—	—	113	2,466

1) In accordance with ISO 5855-2, except the thread major diameter " d max." which shall be equal to D_1 min. - 0,025.

2) Increments :

1 for $L_1 \leq 30$ 2 for $30 < L_1 \leq 100$ 4 for $L_1 > 100$ 3) If greater lengths are required, they shall be chosen using the above increments. The length code corresponds to the length L_1 , completed by one or two zeros to the left, where necessary, to obtain a three digit code.4) Approximate values (kg/1 000 pieces), calculated on the basis of 7,85 kg/dm³, given for information purposes only. They apply to screws without hole.5) Value for first L_4 6) Increase for each additional millimetre of L_4 .